



DH-IPC-HFW1230C-A
Fixed Focal Bullet
Network Camera



dahua DH-IPC-HFW1230C-A 2MP Entry IR Fixed Focal Bullet Network Camera Owner's Manual

[Home](#) » [Dahua](#) » dahua DH-IPC-HFW1230C-A 2MP Entry IR Fixed Focal Bullet Network Camera Owner's Manual



Contents

- [1 dahua DH-IPC-HFW1230C-A 2MP Entry IR Fixed Focal Bullet Network Camera](#)
- [2 Series Overview](#)
- [3 Functions](#)
- [4 Technical Specification](#)
- [5 Accessories](#)
- [6 Documents / Resources](#)
 - [6.1 References](#)
- [7 Related Posts](#)



dahua DH-IPC-HFW1230C-A 2MP Entry IR Fixed Focal Bullet Network Camera



Series Overview

With features of simple installation, easy operation, and high performance-cost ratio, Dahua Entry series network camera is applicable to small and medium-sized scenes, such as homes/residences, small-sized retail stores, and other small and medium-sized enterprises.

Functions

Smart H.265+ & Smart H.264+

With advanced scene-adaptive rate control algorithm, Dahua smart encoding technology realizes the higher encoding efficiency than H.265 and H.264, provides high-quality video, and reduces the cost of storage and transmission.

Smart Illumination

Dahua Smart Illumination technology can display image in the environment of low illuminance or completely dark environment. According to the distance of the targets, the camera adjusts illuminations intensity automatically to display the details of the moving target.

Human Detection

Dahua intelligent algorithms extract moving human targets from videos and filters out alarms that are triggered by non-human targets to increase the accuracy and effectiveness of alarms.

The parameters and datasheets below can only be applied to 1230C-A series

- 2-MP 1/2.8" CMOS image sensor, low luminance, and high definition image.
- Outputs max. 2 MP (1920 ×1080)@25/30 fps.
- H.265 codec, high compression rate, ultra-low bit rate.
- Built-in IR LED, and the max. illumination distance is 30 m.
- DWDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes.
- ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments.
- Abnormality detection: Motion detection, video tampering, audio detection, network disconnection, IP conflict, illegal access.
- Built in Mic.
- 12 VDC/PoE power supply, easy for installation.
- IP67 protection.
- Supports human detection.



Cyber Security

Dahua network cameras employ a series of security technologies, including security authentication and authorization, access control protocols, trusted protection, encrypted transmission and encrypted storage. These technologies improve the camera's defense against external cyber threats and prevent malicious programs from compromising the device.

Protection (IP67, Wide Voltage)

- **IP67:** The camera passes a series of strict test on dust and soak. It has dust-proof function, and the enclosure

can work normally after soaking in 1 m deep water for 30 minutes.

- **Wide voltage:** The camera allows $\pm 30\%$ (for some power supplies) input voltage tolerance (wide voltage range), and it is widely applied to outdoor environment with instable voltage.

Technical Specification

Camera

Image Sensor	1/2.8" CMOS
Max. Resolution	1920 (H) × 1080 (V)
ROM	16 MB
RAM	64 MB
Scanning System	Progressive
Electronic Shutter Speed	Auto/Manual 1/3 s–1/100,000 s
Min. Illumination	0.01 lux@F2.0 (Color, 30 IRE) 0.001 lux@F2.0 (B/W, 30 IRE) 0 lux (Illuminator on)
S/N Ratio	>56 dB
Illumination Distance	Up to 30 m (98.43 ft) (IR)
Illuminator On/Off Control	Auto;Manual
Illuminator Number	2 (IR LED)
Angle Adjustment	Pan: 0°–360° Tilt: 0°–90° Rotation: 0°–360°

Lens

Lens Type		Fixed-focal			
Lens Mount		M12			
Focal Length		2.8 mm;3.6 mm			
Max. Aperture		F2.0			
Field of View		2.8 mm: H: 101°; V: 54°; D: 119° 3.6 mm: H: 86°; V: 47°; D: 103°			
Iris Control		Fixed			
Close Focus Distance		2.8 mm: 0.6 m (1.97 ft) 3.6 mm: 0.9 m (2.95 ft)			
DORI Distance	Lens	Detect	Observe	Recognize	Identify
	2.8 mm	45.5 m (149.27 ft)	18.2 m (59.71 ft)	9.1 m (29.86 ft)	4.6 m (15.09 ft)
	3.6 mm	52.4 m (171.92 ft)	21.0 m (68.90 ft)	10.5 m (34.45 ft)	5.2 m (17.06 ft)
	*DORI (Detect, Observe, Recognize, Identify) is a standard system (EN-62676-4) for defining the ability of a person viewing the video to distinguish persons or objects within a covered area. The numbers in this table do not reflect intelligent function distances. For intelligent function distances, refer to installation and commissioning manual/ project design tool.				

Intelligence

Human Detection	Support the classification and accurate detection of human
Smart Search	Work together with Smart NVR to perform refine intelligent search, event extraction and merging to event videos

Video

Video Compression	H.265; H.264; H.264H; H.264B; MJPEG (Only supported by the sub stream)
Smart Codec	Smart H.265+; Smart H.264+

--	--

Video Frame Rate	<p>Main stream: 1920 × 1080@(1–25/30 fps)</p> <p>sub stream: 704 × 576@(1–25 fps)/704 × 480@(1–30 fps)</p> <p>*The values above are the max. frame rates of each stream; for multiple streams, the values will be subjected to the total encoding capacity.</p>
Stream Capability	2 streams
Resolution	1080p (1920 × 1080); 1.3M (1280 × 960); 720p (1280 × 720); D1 (704 × 576/704 × 480); VGA (640 × 480); CIF (352 × 288/352 × 240)
Bit Rate Control	CBR/VBR
Video Bit Rate	H.264: 32 kbps–4096 kbps; H.265: 12 kbps–4096 kbps
Day/Night	Auto(ICR)/Color/B/W
BLC	Yes
HLC	Yes
WDR	DWDR
White Balance	Auto; natural; street lamp; outdoor; manual; regional custom
Gain Control	Auto/Manual
Noise Reduction	3D NR
Motion Detection	OFF/ON (4 areas, rectangular)
Region of Interest (RoI)	Yes (4 areas)
Smart Illumination	Yes

Image Rotation	0°/90°/180°/270° (Support 90°/270° with 1080p resolution and lower)
Mirror	Yes
Privacy Masking	4 areas

Audio

Built-in MIC	Yes, built-in Mic
Audio Compression	G.711a; G.711Mu; PCM; G.726

Alarm

Alarm Event	Network disconnection; IP conflict; illegal access; motion detection; video tampering; audio detection; security exception; SMD (human)
-------------	---

Network

Network Port	RJ-45 (10/100 Base-T)
SDK and API	Yes
Network Protocol	IPv4; IPv6; HTTP; TCP; UDP; ARP; RTP; RTSP; RTCP; RTMP; SMTP; FTP; DHCP; DNS; DDNS; NTP; Multicast; ICMP; IGMP; P2P
Interoperability	ONVIF (Profile S & Profile T); CGI
User/Host	6 (Total bandwidth: 24 M)
Storage	FTP
Browser	IE; Chrome; Firefox
Management Software	Smart PSS Lite; DSS; DMSS; DoLink Care
Mobile Client	iOS;Android

--	--

Cyber Security	Configuration encryption;Trusted execution;Digest;Security logs;HTTPS;Trusted upgrade;WSSE;Trusted boot;Account lockout;Generation and importing of X.509 certification;Video encryption
Certification	
Certifications	CE-LVD: EN62368-1; CE-EMC: Electromagnetic Compatibility Directive 2014/30/EU
Power	
Power Supply	12 VDC/PoE (802.3af)
Power Consumption	Basic: 1.3 W (12 VDC); 1.6 W (PoE); Max. (H.265 + intelligence on + WDR+ IR intensity): 4.7 W (12 VDC); 6.0 W (PoE)
Environment	
Operating Temperature	−40 °C to +60 °C (−40 °F to +140 °F)
Operating Humidity	≤95%(RH), non-condensing
Storage Temperature	−40 °C to +60 °C (−40 °F to +140 °F)
Storage Humidity	≤95%(RH), non-condensing
Protection	IP67
Structure	
Casing Material	Metal + Plastic
Product Dimensions	161.6 mm × 70.0 mm × 69.7 mm (6.36" × 2.75" × 2.74") (L × W × H)
Net Weight	0.24 kg (0.53 lb)

Gross Weight	0.35 kg (0.77 lb)
--------------	-------------------

Ordering Information

Type	Model	Description
2MP Camera	DH-IPC-HFW1230C-A	2MP Entry IR Fixed-focal Bullet Network Camera
Accessories (Optional)	PFA134	Junction Box
	PFA152-E	Pole Mount Bracket
	PFM321D	12 VDC 1A Power Adapter
	PFM900-E	Integrated Mount Tester

Accessories

Optional:



PFA134
Junction Box



PFA152-E
Pole Mount Bracket




PFM321D
12 VDC 1A Power Adapter



PFM900-E
Integrated Mount Tester


Ceiling Mount	Junction Mount	Pole Mount(Vertical)

Dimensions (mm[inch])

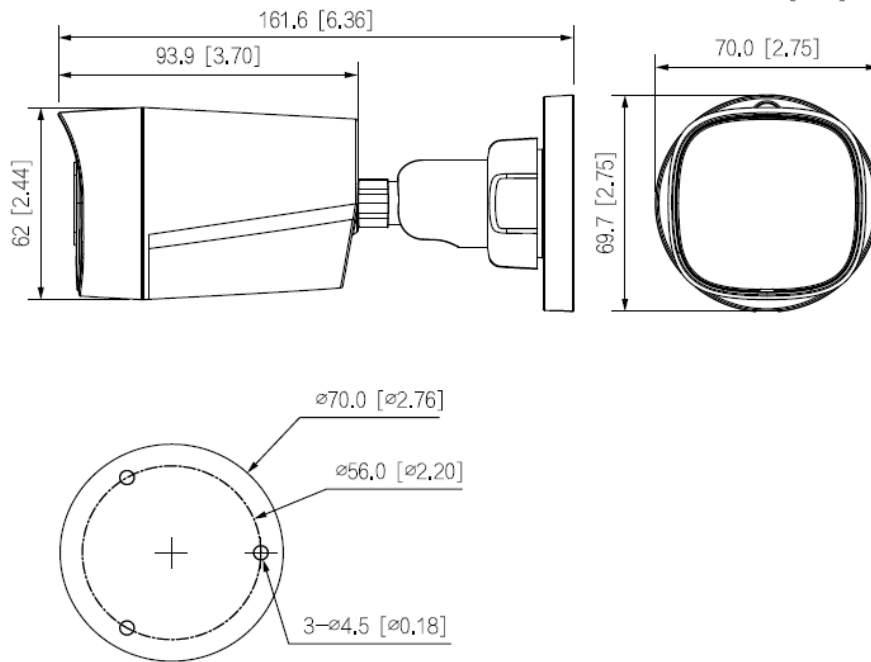

© 2024 Dahua. All rights reserved. Design and specifications are subject to change without notice. The images, specifications and information mentioned in the document are only for reference, and might differ from the actual product. www.dahuasecurity.com

Documents / Resources

	<p>dahua DH-IPC-HFW1230C-A 2MP Entry IR Fixed Focal Bullet Network Camera [pdf] Owner's Manual</p> <p>DH-IPC-HFW1230C-A, DH-IPC-HFW1230C-A 2MP Entry IR Fixed Focal Bullet Network Camera, 2MP Entry IR Fixed Focal Bullet Network Camera, IR Fixed Focal Bullet Network Camera, Focal Bullet Network Camera, Bullet Network Camera, Network Camera, Camera</p>
---	---

References

- [Dahua Technology - World Leading Video-Centric AIoT Solution & Service Provider](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.