

# Danfoss 080G5555 Back up Power Module Installation Guide

ENGINEERING  
TOMORROW



## Contents

- [1 Installation guide](#)
- [2 Back up power module](#)
  - [2.1 Type EKE 2U](#)
    - [2.1.1 Introduction](#)
    - [2.1.2 Wiring Diagram](#)
    - [2.1.3 Technical specifications](#)
    - [2.1.4 Cable length](#)
    - [2.1.5 Cable and wiring](#)
    - [2.1.6 General features and warnings](#)
      - [2.1.6.1 Plastic housing features](#)
      - [2.1.6.2 Other features](#)
      - [2.1.6.3 Safety and approvals](#)
      - [2.1.6.4 General warnings](#)
      - [2.1.6.5 Installation warnings](#)
      - [2.1.6.6 Product warnings](#)
      - [2.1.6.7 DIN rail mounting / demounting](#)
      - [2.1.6.8 Sharing Power supply and SOH signal](#)
    - [2.1.7 Quick guide for parameter selection in EKE controllers](#)
    - [2.1.8 Related products](#)
- [3 Documents / Resources](#)
  - [3.1 References](#)
- [4 Related Posts](#)

## Installation guide

## Back up power module

## Type EKE 2U

UK  
CA

## Introduction

EKE 2U module is an optional energy storage device. The module can provide enough energy during power failure to the stepper controller to ensure closure of the electronic valves. It can be used with one or two controllers depending on the application.

State of Health (SOH) function of EKE 2U gives feedback to controllers to detect the status of the backup module and lets the controller know if the backup is Ready to use, Charging or Failed.

Power Failure signal (PF): This signal should be connected to controller only if the controller cannot detect power

failure by itself. Not required for EKE controllers.


Load Switch, EKE 2U can deliver power backup for 2 valves. While using more than 1 valve the load switch can be changed to deliver more energy.

Compatible Controllers: Danfoss EKE series and MCX controllers. For other controllers, please contact Danfoss.



More info

## Wiring Diagram

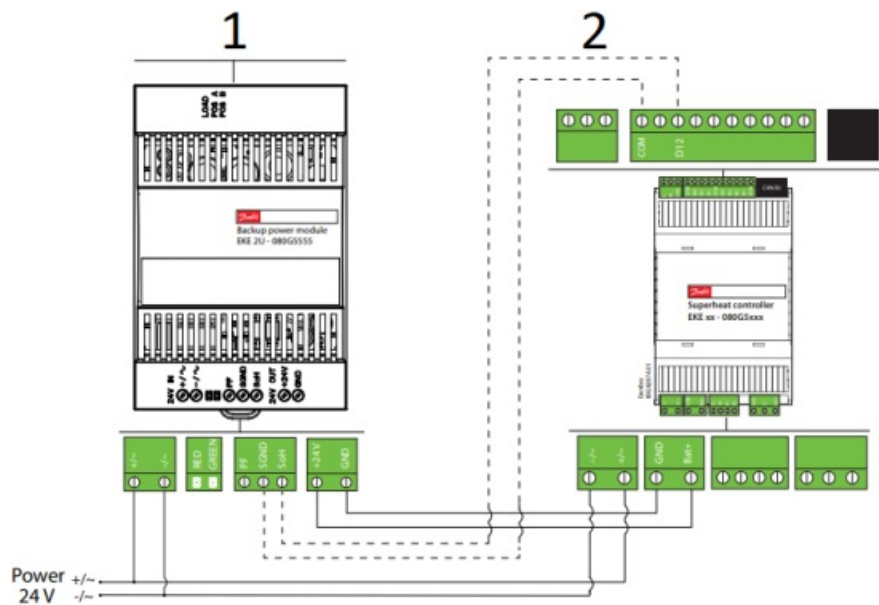

1. LOAD SWITCH
2. SoH communication (optional)


Info for UK customers only: Danfoss Ltd., 22 Wycombe End, HP9 1NB, GB



080R9346

*Danfoss*

Dimensions in mm  
EKE 2U

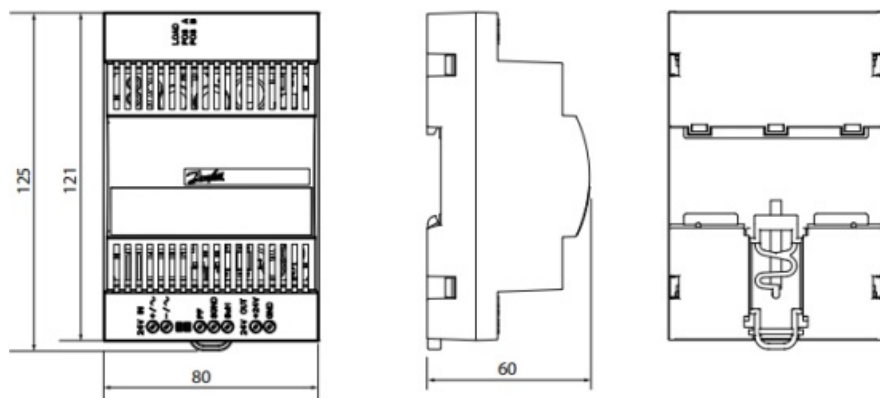

Weight: 233 gram

#### Technical specifications

Nominal input voltage	24 V DC / 24 V AC
Input voltage range	20 – 40 V DC, 19 – 29 V AC
Frequency	DC / AC 50 ... 60 Hz + /-10%
Overvoltage capability	< 42 V DC < 30 V AC
Nominal input power	DC: 15 VA, AC: 25 VA
Protection class	II
Inrush current	< 15 A
Standby current @ 24 V DC	~ 0.1 A
Nominal output voltage (U <sub>NOM</sub> )	24.0 V DC ± 2%
Nominal output current (I <sub>NOM</sub> )	2 A
Maximum output current on standby	30 mA
Current limiting	2.5 A ± 10%
Parallel connection for time increase	yes
Series connection	no
Capacitor charging current @ 24 V DC	< 1 A
Charging time	~ 2.5 min from fully discharged state
Max Voltage / current at X2 (open collector)	24V / 8.5 mA
Ambient temperature during operation	T <sub>AMB</sub> = -25 °C – + 60 °C
Storage temperature	– 30 °C – + 70 °C
Humidity	< 90 % rH, no condensation.
Environmental pollution	Type 2
Protection degree	IP 20
Altitude	Up to 2000 m
Immunity to voltage Surges EN 61000-4-5	Level 3 in/out Level 2 signals
Assembly	On DIN rail
Overvoltage protection	Category II
Lifespan	>90000 hours (10 years) @ 35 °C and >3 years @ 50 °C
MTBF	> 500.000 h @ 25 °C according to IEC 61709 / SN 29500

Recommended Load Switch Position

Valve Type	Number of valves	
	1 Valve	2 Valves
ETS 5M / ETS 6	POS B	POS A
ETS Colibri	POS B	POS B
ETS 12.5 to 100, ETS 250, ETS 400	POS B	POS B
KVS 15/42	POS B	POS B
CCMT / CCM	POS B	POS A

### Important Notes :

- Load switch POS A and POS B defines the max energy supplied by the EKE 2U as power backup.
- POS A delivers more energy than POS B. Using at POS B further increases lifetime of EKE 2U.
- Load switch has default position POS A and POS A will work throughout all combinations.

State of Health (SOH)	Function	LEDs
<b>Ready</b>	Backup is ready and controller can start operating valves.	Green on Red off
<b>Charge</b>	Backup module is charging. Controller must not operate valves.	Green flashing . 1 Hz Red off
<b>Replace</b>	Backup module needs to be replaced. But valves can be operated.	Green: Ready or Charge Red on.
<b>Failure</b>	Backup module does not work. Controller can still operate valves. But at a power loss no guarantee that the valves can close.	Green off Red flashing. 1Hz

### Cable length

EKE 2U supports the following max. cable length.

	Cable length [m]	Wire size min. / max. [mm²]
<b>Power supply Input</b>	max. 5	0.2 / 1.5
<b>Backup output</b>	max. 5	0.2 / 1.5
<b>Digital outputs</b>	max. 5	0.2 / 1.5

### Cable and wiring

- Keep power and battery backup cable separate from SOH cable

## General features and warnings

### Plastic housing features

- DIN rail mounting
- Self-extinguishing V0

### Other features

- Operating conditions CE: -25T60, 90% RH non-condensing
- Storage conditions: -30T70, 90% RH non-condensing
- Max duty-cycle Charge/Discharge at nominal load 15min ON / 10s OFF
- To be integrated in Class I and/or II appliances
- Index of protection: IP 20
- Period of electric stress across insulating parts: long
- Suitable for using in a normal pollution environment
- Immunity against voltage surges: category II

### Safety and approvals

This product is designed to comply with the following standards:

- EN61000-6-1, EN61000-6-3 (immunity for residential, commercial and light-industrial environments)
- EN61000-6-2, EN61000-6-4 (immunity and emission standard for industrial environments)
- UL 61010
- IEC 61010-2-201:2013

### General warnings

- Every use that is not described in this manual is considered incorrect and is not authorized by the manufacturer
- Verify that the installation and operating conditions of the device respect those specified in the manual, especially concerning the supply voltage and environmental conditions
- This device contains live electrical components. All service and maintenance operations must therefore be performed by qualified personnel
- The device must not be used as a safety device
- Liability for injury or damage caused by the incorrect use of the device lies solely with the user
- The manufacture's guarantee expires in the event of improper use



### Installation warnings

- Intended mounting position: vertical
- Installation must comply with local standards and legislation
- Before working on the electrical connections, disconnect the device from the main power supply
- Before carrying out any maintenance operations on the device, disconnect all electrical connections
- For safety reasons the appliance must be fitted inside an electrical panel with no live parts accessible
- Do not expose the device to continuous water sprays or to a relative humidity greater than 90%
- Avoid exposure to corrosive or pollutant gases, natural elements, environments where explosives or mixes of flammable gases are present, dust, strong vibrations or shock, large and rapid fluctuations in ambient temperature that might cause condensation in combination with high humidity, strong magnetic and/or radio interference (e.g. transmitting antennae)
- When connecting loads be aware of the maximum current for each relay and connector
- Use cable ends suitable for the corresponding connectors. After tightening connector screws, tug the cables gently to check their tightness
- Use appropriate data communication cables. Refer to the EKE data sheet for the kind of cable to be used and setup recommendations
- Minimize the length of probe and digital input cables as much as possible and avoid spiral routes around power devices. Separate from inductive loads and power cables to avoid possible electromagnetic noises

- Avoid touching or nearly touching the electronic components fitted on the board to avoid electrostatic discharges
- Use copper cables for operating temperatures  $>75\text{ }^{\circ}\text{C}$  (ambient temperature  $\leq 60\text{ }^{\circ}\text{C}$ )


#### Product warnings


- Use a class II category transformer for 24 V AC power supply
- Connecting any output signals to mains voltage will permanently damage the controller



#### DIN rail mounting / demounting


The unit can be mounted onto a 35 mm DIN rail simply by snapping it into place and securing it with a stopper to prevent sliding. It is demounted by gently pulling the stirrup located in the base of the housing.

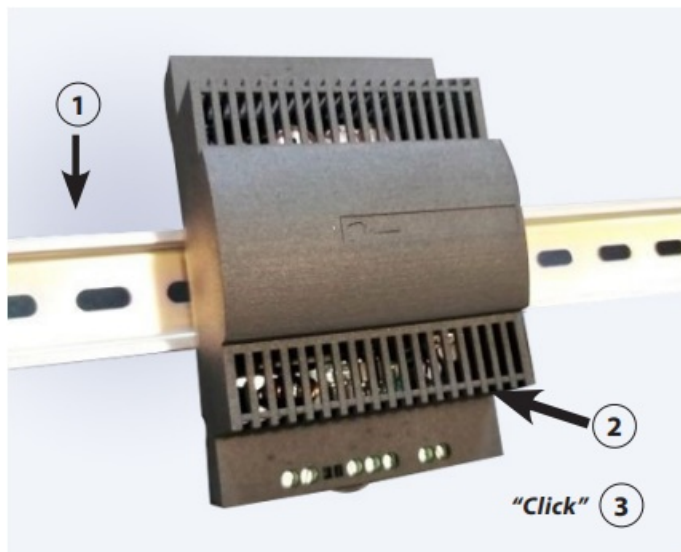

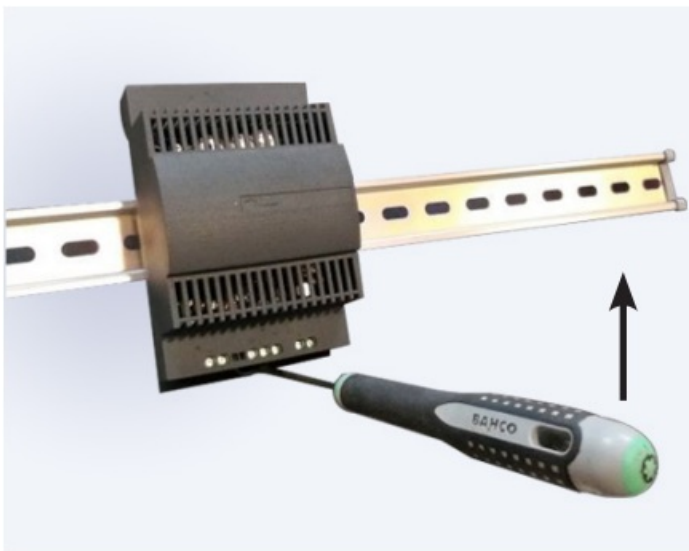

#### Sharing Power supply and SOH signal

- Power sharing is allowed between EKE 2U power backup module and EKE SH controllers provided power supply is DC.
- Max 2 EKE controller should be connected to 1 EKE 2U
- SOH signal should not be shared. It should be connected to only one EKE controller and the readouts should be taken from this controller.

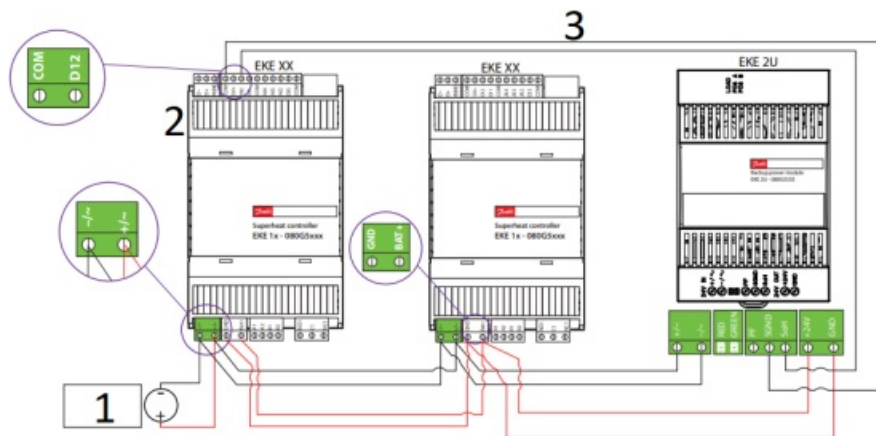

SHARING EKE 2U WITH 2 CONTROLLERS

1. DC Power supply
2. Danfoss  
80G295.10
3. SoH Signal

#### Quick guide for parameter selection in EKE controllers

Start : Main switch= Off

Make sure that main switch is OFF before changing the settings. The setting will depend on the system requirement.

Parameter: **R012** Main Switch





### Select DI2 configuration

Set DI2 to PWR backup status. This should be used only if EKE 2U SOH is connected to DI2 of EKE 1.  
Enables EKE 1 to read SOH signal.

Parameter: **0022** DI2 configuration



### Battery Alarm

Battery alarm function must be set ON/OFF depending on the signal needed. If set to On then EKE 1 will send alarm if EKE 2U battery is low.

Parameter: **A034** Battery alarm



### Actual battery voltage read out

Using parameter U101 actual battery voltage of EKE 2U can be read through EKE 1.

Parameter: **U101** Actual battery voltage



### Power backup status readout

Using parameter U115. Power backup status of EKE 2U can be read from EKE 1. Only applicable if SOH is connected to DI2.

Parameter: **U115** PWR Backup status






### DI1=ON

Set main switch back to ON status to start the controller.

Parameter: **R012** Main switch


### Related products

Power Supply	EKE series controllers	Stepper motor valves
		
<b>AK-PS</b> Input: 100 – 240 V AC, 45 – 65 Hz Output: 24 V DC: available with 18 VA, 36 VA and 60 VA <b>ACCTRD</b> Input: 230 V AC, 50 – 60 Hz Output: 24 V AC, available with 12 VA, 22 VA and 35 VA	EKE series preprogrammed superheat controllers/ drivers for controlling electric expansion valves.	EKE is compatible with Danfoss stepper motor valves i.e Danfoss ETS 6, ETS, KVS, ETS Colibri®, KVS colibri®, CTR, CCMT

© Danfoss | Climate Solutions | 2021.09

AN325741621547en-000803

## Documents / Resources

	<a href="#">Danfoss 080G5555 Back up Power Module</a> [pdf] Installation Guide Type EKE 2U, 080R9346, 080G5555, 080G5555 Back Up Power Module, Back Up Power Module, Power Module
---	--

## References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.