



## **Danfoss 51-1 Motor Electrohydraulic Two Position Controls Instruction Manual**

[Home](#) » [Danfoss](#) » Danfoss 51-1 Motor Electrohydraulic Two Position Controls Instruction Manual 



**Instruction Manual**



**Electrical Installation  
Series 51-1 Motor  
Electrohydraulic Two-Position  
Controls F1, F2**

## Contents

- [1 51-1 Motor Electrohydraulic Two Position Controls](#)
- [2 Literature references](#)
- [3 Product overview](#)
- [4 Electrical installation](#)
- [5 Documents / Resources](#)
  - [5.1 References](#)

## 51-1 Motor Electrohydraulic Two Position Controls

[powersolutions.danfoss.com](http://powersolutions.danfoss.com)



### Revision history

Table of revisions

Date	Changed	Rev
August 2015	Converted to Danfoss layout	BA
April 2007	First edition	AA

### Literature references

#### S51-1 Electrohydraulic Two-Position Controls F1, F2 literature references

Literature title	Description	Literature number
S51 and 51-1 Bent Axis Variable Displacement Motors Technical Information	Complete product electrical and mechanical specifications	520L0440
On/Off Functions Function Block User Manual	Compliant function block set-up information	11022918

#### Latest version of technical literature

Danfoss product literature is online at: <http://powersolutions.danfoss.com/literature/>

### Product overview


#### Product image

S51-1 Electrohydraulic Two-Position Controls F1, F2



### Nomenclature

S51-1 model code

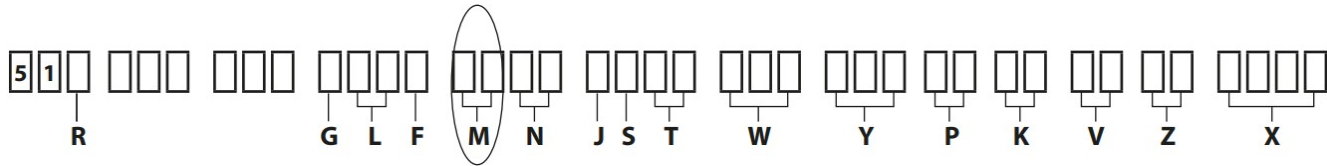

Code M options

M	Description
F1	Electrohydraulic two-position control, 12 Vdc
F2	Electrohydraulic two-position control, 24 Vdc


Only certain control options for the S51-1 motor utilize the Electrohydraulic Two-Position Control. Please refer to the motor's nomenclature to determine if the motor is equipped with the proper option. The nomenclature can be found on the motor's nametag.

### Theory of operation

Displacement can be changed electrohydraulically under load from maximum displacement to minimum displacement and vice versa, by using a built-in solenoid valve.

- Solenoid off = minimum displacement
- Solenoid on = maximum displacement

Control operation

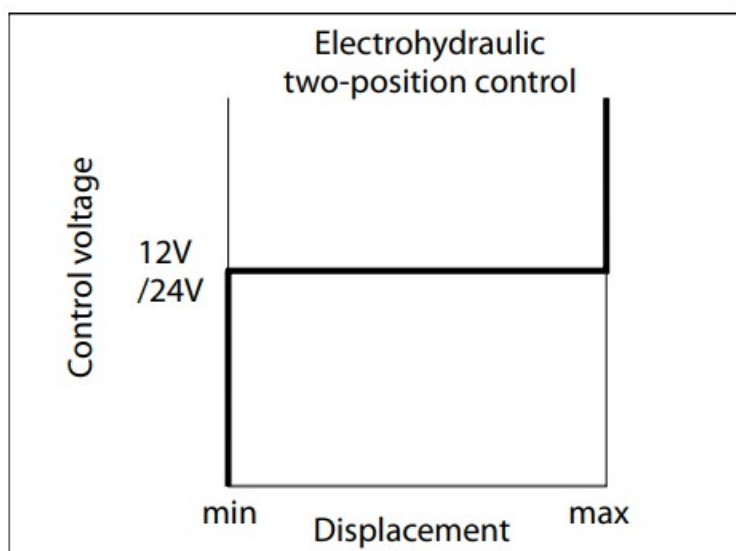

P001 871E




### Warning

Unintended vehicle or machine movement hazard. The loss of hydrostatic drive line power, in any mode of operation (forward, neutral, or reverse) may cause the system to lose hydrostatic braking capacity. You must provide a braking system, redundant to the hydrostatic transmission, sufficient to stop and hold the vehicle or machine in the event of hydrostatic drive power loss.

### Hydraulic schematics

Circuit diagram – motor with control options: F1B1, F2B1

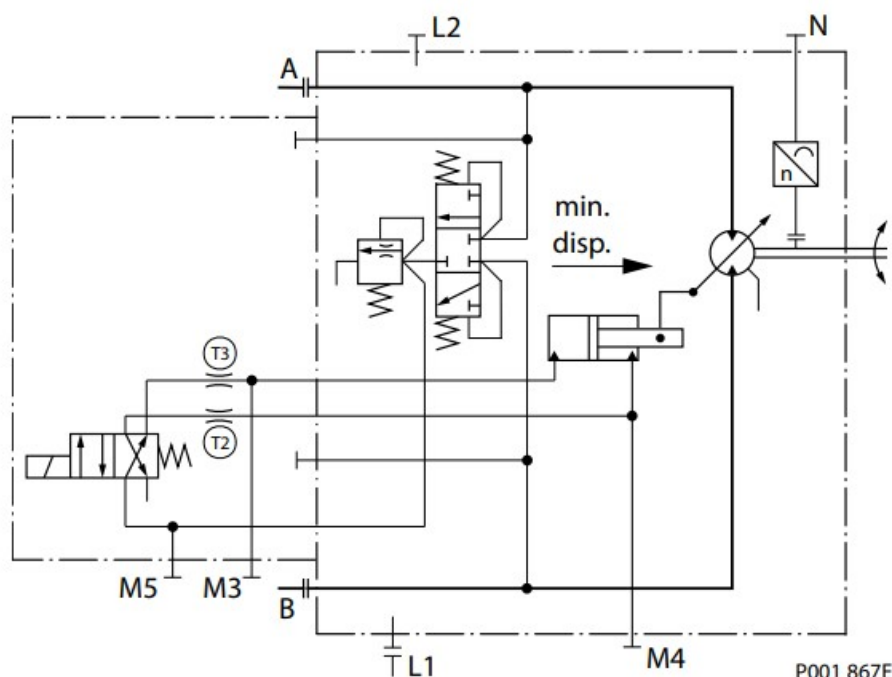

P001 867E

Ports:

A, B = Main pressure lines

L1, L2 = Drain lines

M3, M4 = Servo pressure

M5 = Gauge port servo supply pressure internal

T2, T3 = Optional orifices

N = Speed sensor

### Electrical specifications

Two-position solenoid


M-option	F1	F2
Voltage	12 Vdc	24 Vdc
Rated power	14.7 W	14.7 W

## Electrical installation

### Pinout

DIN 43650 connector

### *Pin location*



Pin	Function
1	PWM signal
2	Ground

Pinout (alternative)

Pin	Function
1	Ground
2	PWM signal

### Pin compatibility

PLUS+1® module pin type

Pin	Function
1,2	DOUT
1,2	DOUT/PVG Power
1,2	PWMOUT/DOUT/PVG Power supply
1,2	PWMOUT/DOUT/PVGOUT
1,2	Power ground –

### Mating connector

DIN 43650 connector parts list

Description	Quantity	Ordering Number
DIN 43650 connector	1	Hirschmann 932 106-100
Mating connector kit	1	Danfoss K09129

#### Products we offer:

- Bent Axis Motors
- Closed Circuit Axial Piston Pumps and Motors
- Displays
- Electrohydraulic Power Steering
- Electrohydraulics
- Hydraulic Power Steering
- Integrated Systems
- Joysticks and Control Handles
- Microcontrollers and Software
- Open Circuit Axial Piston Pumps
- Orbital Motors
- PLUS+1® GUIDE
- Proportional Valves
- Sensors
- Steering
- Transit Mixer Drives

Danfoss Power Solutions is a global manufacturer and supplier of high-quality hydraulic and electronic components. We specialize in providing state-of-the-art technology and solutions that excel in the harsh operating conditions of the mobile off-highway market. Building on our extensive applications expertise, we work closely with our customers to ensure exceptional performance for a broad range of off-highway vehicles.

We help OEMs around the world speed up system development, reduce costs and bring vehicles to market faster. Danfoss – Your Strongest Partner in Mobile Hydraulics.

Go to [www.powersolutions.danfoss.com](http://www.powersolutions.danfoss.com) for further product information.

Wherever off-highway vehicles are at work, so is Danfoss. We offer expert worldwide support for our customers, ensuring the best possible solutions for outstanding performance. And with an extensive network of Global Service Partners, we also provide comprehensive global service for all of our components. Please contact the Danfoss Power Solution representative nearest you.

#### Comatrol

[www.comatrol.com](http://www.comatrol.com)

Schwarz Müller-Inverter

[www.schwarzmuellerinverter.com](http://www.schwarzmuellerinverter.com)

Turolla

[www.turollaocg.com](http://www.turollaocg.com)

Hydro-Gear

[www.hydro-gear.com](http://www.hydro-gear.com)

Daikin-Sauer-Danfoss

[www.daikin-sauer-danfoss.com](http://www.daikin-sauer-danfoss.com)

Local address:


Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order

provided that such alterations can be made without changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.










<p><b>Danfoss Power Solutions (US) Company</b>  2800 East 13th Street  Ames, IA 50010, USA  Phone: +1 515 239 6000</p>	<p><b>Danfoss Power Solutions GmbH &amp; Co. OHG</b>  Krokamp 35  D-24539 Neumünster, Germany  Phone: +49 4321 871 0</p>	<p><b>Danfoss Power Solutions ApS</b>  Nordborgvej 81  DK-6430 Nordborg, Denmark  Phone: +45 7488 2222</p>	<p><b>Danfoss Power Solutions Trading</b>  (Shanghai) Co., Ltd.  Building #22, No. 1000 Jin Hai Rd  Jin Qiao, Pudong New District  Shanghai, China 201206  Phone: +86 21 3418 5200</p>
--	--	--	--

11024972 • Rev BA  
August 2015  
[www.danfoss.com](http://www.danfoss.com)  
© Danfoss A/S, 2015

## Documents / Resources

	<p><a href="#">Danfoss 51-1 Motor Electrohydraulic Two Position Controls</a> [pdf] Instruction Manual  51-1 Motor Electrohydraulic Two Position Controls, 51-1, Motor Electrohydraulic Two Position Controls, Electrohydraulic Two Position Controls, Two Position Controls, Position Controls</p>
---	--

## References

-  [Inverter, Solar Inverter, Home Power Inverter | inverter.com](http://inverter.com)
-  [Danfoss Power Solutions – Explore our power solutions | Danfoss](#)
-  [Danfoss Power Solutions – Explore our power solutions | Danfoss](#)
-  [Danfoss Power Solutions – Explore our power solutions | Danfoss](#)
-  [Daikin Sauer Danfoss - Home](#)
-  [Engineering Tomorrow | Danfoss](#)
-  [Hydro-Gear Drivetrain Solutions | Home](#)
-  [Danfoss Power Solutions – Explore our power solutions | Danfoss](#)
-  [Danfoss Power Solutions – Explore our power solutions | Danfoss](#)
- [User Manual](#)