



AK-CC55 Compact Case Controllers



Danfoss AK-CC55 Compact Case Controllers User Guide

[Home](#) » [Danfoss](#) » Danfoss AK-CC55 Compact Case Controllers User Guide

Contents

- 1 Danfoss AK-CC55 Compact Case Controllers
- 2 Product Usage Instructions
- 3 Programming Guide
- 4 Copyright, Limitation of Liability and Revision Rights
- 5 Modbus Communication
- 6 Parameter list for Compact (084B4081)
- 7 More Info
- 8 FAQ
- 9 Documents / Resources
 - 9.1 References



Danfoss AK-CC55 Compact Case Controllers



Product Specifications

- Model: AK-CC55 Compact
- Software Version: 2.1x
- Communication Protocol: Modbus RTU
- Communication Speed: Default auto detection
- Communication Settings: 8 bit, Even parity, 1 stop bit

Product Usage Instructions

Modbus Communication

- Danfoss AK-CC55 controllers use Modbus RTU for communication.
- The default communication settings are 8 bit, Even parity, 1 stop bit. The network address can be set using the AK-UI55 setting display. Network address and communication settings can be changed through the AK-UI55 Bluetooth display and the AK-CC55 Connect service app. For more information, refer to the AK-CC55 Documentation.

AK-CC55 Documentation


- The Modbus Application Protocol Specification for Danfoss AK-CC55 controllers can be found at <http://modbus.org/specs.php>. User Guides and Installation Guides for AK-CC55 can be found on the Danfoss website at [Danfoss Documentation](#).

Parameter List for Compact (084B4081)

Here are some of the parameter readouts and settings available for the AK-CC55 Compact:

- Sum alarm
- Ctrl. State
- Ther. air
- EvapTemp Te
- S2 temp

Programming Guide

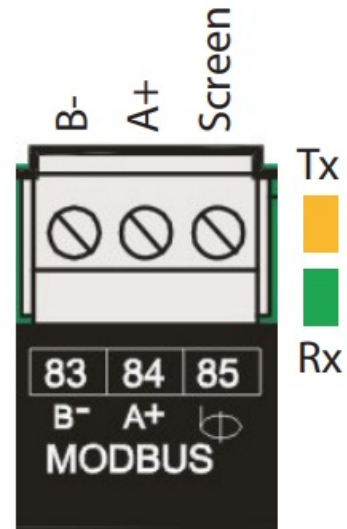

TELIA 4G 10.43

Network

Read out Settings

Network address 0 >

Baudrate Auto >

Parity and stop bit Even >

TELIA 4G 10.44

Baudrate Done

Auto ☒

9600 Baud ☐

19200 Baud ☐

38400 Baud ☐

Display code

Communication speed of network

TELIA 4G 10.45

Parity and stop bit Done

None ☐

Even ☒

Odd ☐

Display code

Select parity and stop bit of Modbus messages

Copyright, Limitation of Liability and Revision Rights

- This publication contains information proprietary to Danfoss. By accepting and using this interface description the user agrees that the information contained herein will be used solely for operating equipment from Danfoss or equipment from other vendors provided that such equipment is intended for communication with Danfoss AK-CC55 Compact Controllers over the RS 485 Modbus serial communication link.
- This publication is protected under the Copyright laws of Denmark and most other countries.
- Danfoss does not guarantee that a software program produced according to the guidelines provided in this manual will function properly in every physical, hardware or software environment.
- Although Danfoss has tested and reviewed the documentation within this interface description, Danfoss makes no warranty or representation, either express or implied, with respect to this documentation, including its quality, performance, or fitness for a particular purpose.

- In no event shall Danfoss be liable for direct, indirect, special, incidental, or consequential damages arising out of the use, or the inability to use information contained in this interface description, even if advised of the possibility of such damages.
- In particular, Danfoss is not responsible for any costs including but not limited to those incurred as a result of lost profits or revenue, loss or damage of equipment, loss of computer programs, loss of data, the costs to substitute these, or any claims by third parties.
- Danfoss reserves the right to revise this publication at any time and to make changes in its contents without prior notice or any obligation to notify previous users of such revisions or changes.

Modbus Communication

- Danfoss AK-CC55 controllers are using Modbus RTU.
- Communication speed is default “auto detection”
- Default communication settings are “8 bit, Even parity, 1 stop bit”.
- Network address can be set via AK-UI55 setting display and Network address as well as Network communication settings can be changed via the AK-UI55 Bluetooth display and the AK-CC55 Connect service app. For further information see AK-CC55 Documentation.
- Danfoss AK-CC55 controllers are Modbus compliant and MODBUS Application Protocol Specification can be found via below link <http://modbus.org/specs.php>

AK-CC55 Documentation

- AK-CC55 User Guides and Installation Guides can be found via www.danfoss.com:
<https://www.danfoss.com/en/products/electronic-controls/dcs/evaporator-and-room-control/#tab-overview>

Parameter list for Compact (084B4081)

Parameter	PNU	Value	Min.	Max.	Type	RW	Scale	A
Readouts								
— Sum alarm	2541	0	0	1	Boolean	R	1	
u00 Ctrl. State	2007	0	0	48	Integer	R	1	
u17 Ther. air	2532	0	-2000	2000	Float	R	0.1	
u26 EvapTemp Te	2544	0	-2000	2000	Float	R	0.1	
u20 S2 temp	2537	0	-2000	2000	Float	R	0.1	
u12 S3 air temp.	2530	0	-2000	2000	Float	R	0.1	

u16 S4 air temp.	2531	0	-2000	2000	Float	R	0.1	
u09 S5 temp	1011	0	-2000	2000	Float	R	0.1	
U72 Food temp	2702	0	-2000	2000	Float	R	0.1	
u23 EEV OD %	2528	0	0	100	Integer	R	1	X
U02 PWM OD %	2633	0	0	100	Integer	R	1	X
U73 Def.StopTemp	2703	0	-2000	2000	Float	R	0.1	
u57 Alarm air	2578	0	-2000	2000	Float	R	0.1	
u86 Ther. band	2607	1	1	2	Integer	R	0	
u13 Night cond	2533	0	0	1	Boolean	R	1	
u90 Cutin temp.	2612	0	-2000	2000	Float	R	0.1	
u91 Cutout temp.	2513	0	-2000	2000	Float	R	0.1	
u21 Superheat	2536	0	-2000	2000	Float	R	0.1	X
u22 SuperheatRef	2535	0	-2000	2000	Float	R	0.1	X
Settings								
r12 Main switch	117	0	-1	1	Integer	RW	1	
r00 Cutout	100	20	-500	500	Float	RW	0.1	
r01 Differential	101	20	1	200	Float	RW	0.1	
— Def. Start	1013	0	0	1	Boolean	RW	1	
d02 Def . Stop temp	1001	60	0	500	Float	RW	0.1	
A03 Alarm delay	10002	30	0	240	Integer	RW	1	
A13 HighLim Air	10019	80	-500	500	Float	RW	0.1	
A14 LowLim Air	10020	-300	-500	500	Float	RW	0.1	
r21 Cutout 2	131	2.0	-60.0	50.0	Float	RW	1	

r93 Diff Th2	210	2.0	0.1	20.0	Float	RW	1	
--------------	-----	-----	-----	------	-------	----	---	--

Parameter	PNU	Value	Min.	Max.	Type	RW	Scale	A
d02 Def.StopTemp	1001	6.0	0.0	50.0	Float	RW	1	
d04 Max Def.time	1003	45	d24	360	Integer	RW	0	
d28 DefStopTemp2	1046	6.0	0.0	50.0	Float	RW	1	
d29 MaxDefTime2	1047	45	d24	360	Integer	RW	0	

Alarms

— Contr. error	20000	0	0	1	Boolean	R	1	
— RTC error	20001	0	0	1	Boolean	R	1	
— Pe error	20002	0	0	1	Boolean	R	1	
— S2 error	20003	0	0	1	Boolean	R	1	
— S3 error	20004	0	0	1	Boolean	R	1	
— S4 error	20005	0	0	1	Boolean	R	1	
— S5 error	20006	0	0	1	Boolean	R	1	
— High t.alarm	20007	0	0	1	Boolean	R	1	
— Low t. alarm	20008	0	0	1	Boolean	R	1	
— Door alarm	20009	0	0	1	Boolean	R	1	
— Max HoldTime	20010	0	0	1	Boolean	R	1	
— No Rfg. sel.	20011	0	0	1	Boolean	R	1	
— DI1 alarm	20012	0	0	1	Boolean	R	1	
— DI2 alarm	20013	0	0	1	Boolean	R	1	
— Standby mode	20014	0	0	1	Boolean	R	1	
— Case clean	20015	0	0	1	Boolean	R	1	

— CO2 Alarm	20016	0	0	1	Boolean	R	1	
— Refg.Leak	20017	0	0	1	Boolean	R	1	
— Wrong IO cfg	20018	0	0	1	Boolean	R	1	
— Max Def.Time	20019	0	0	1	Boolean	R	1	

Note: Parameters marked with “X” in the “A” (App mode column) is not present in all App modes (for further info see AK-CC55 User Guide).

More Info

- danfoss.com
- +45 7488 2222

FAQ

- **Q: Can the communication settings be customized?**
 - **A:** Yes, the network address and communication settings can be customized using the AK-UI55 setting display and the AK-CC55 Connect service app.
- **Q: Where can I find the full documentation for AK-CC55 controllers?**
 - **A:** You can find the full documentation, including user guides and installation guides, on the Danfoss website at the provided link.

Documents / Resources

	Danfoss AK-CC55 Compact Case Controllers [pdf] User Guide AK-CC55, AK-CC55 Compact Case Controllers, AK-CC55, Compact Case Controllers, Case Controllers
---	--

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.