

VTech VS112-4W

VTech VS112-4W Cordless 4-Handset DECT 6.0 Telephone Bundle Instruction Manual

Model: VS112-4W

INTRODUCTION

The VTech VS112-4W Cordless 4-Handset DECT 6.0 Telephone Bundle with ITAD offers advanced communication features for your home or office. This system includes Bluetooth Connect to Cell technology, a Smart Call Blocker, and a digital answering machine, designed to enhance your calling experience and manage unwanted calls effectively. This manual provides detailed instructions for setup, operation, maintenance, and troubleshooting to ensure optimal performance of your telephone system.

KEY FEATURES

- **Connect to Cell:** Make and receive calls from your cellular plan while enjoying the comforts of a home phone. Pair up to 2 cell phones and connect 2 cell phones or one cell phone and one BLUETOOTH headset for use with landline calls.
- **2" White Backlit Display:** High-contrast text on the extra-large 2" screen makes it easy to read incoming caller ID or call history records. The white backlit handset keypad allows for easy dialing in low-light conditions.
- **22-Minute Digital Answering Machine:** Features English/French voice prompts, an LED counter, dated & time stamp, and remote access from the handset or via calling in, ensuring you don't miss important messages.
- **Smart Call Blocker:** Automatically blocks robocalls from ever ringing through on your landline. The smart call block directory allows you to permanently blacklist up to 1,000 numbers with one touch.
- **Expandable System:** Expandable up to 5 handsets (uses VS112-0 accessory handset - sold separately) for extended coverage throughout your home or office.

SETUP

1. **Unpacking:** Carefully remove all components from the packaging. Ensure all 4 handsets, the main base unit, 3 charger cradles, power adapters, telephone line cord, and rechargeable batteries are present.
2. **Battery Installation:** For each handset, open the battery compartment cover and insert the provided

rechargeable batteries, observing the correct polarity (+ and -). Close the battery compartment.

3. Charging Handsets: Place each handset into its respective charger cradle or the main base unit.

Allow the handsets to charge for at least 16 hours before initial use to ensure optimal battery performance. The CHARGE light on the handset will indicate charging status.

4. Connecting the Main Base Unit:

- Plug one end of the telephone line cord into the TEL LINE jack on the back of the main base unit.
- Plug the other end of the telephone line cord into a telephone wall jack.
- Plug the small end of the power adapter into the POWER jack on the back of the main base unit.
- Plug the large end of the power adapter into an electrical outlet not controlled by a wall switch.

5. Connecting Charger Cradles: For each additional charger cradle, plug its power adapter into an electrical outlet not controlled by a wall switch.

6. Bluetooth Pairing (Connect to Cell):

- Ensure your cellular phone's Bluetooth is enabled.
- On the VTech base unit or handset, navigate to the Bluetooth menu.
- Select "Pair Cell" and follow the on-screen prompts to pair your cellular phone. Up to two cellular phones can be paired.



With up to 22 minutes of recording time, the digital answering system grabs calls when you can't.

Image: The 'Connect to Cell' feature allows the VTech phone to make and receive calls through paired cellular phones, extending the convenience of your mobile device to your home phone system.

OPERATING INSTRUCTIONS

Making and Receiving Calls

- **Making a Call:** Lift a handset from its cradle or press the **TALK/FLASH** button. Dial the desired phone number.
- **Receiving a Call:** When the phone rings, lift a handset from its cradle or press the **TALK/FLASH** button.
- **Using Speakerphone:** During a call, press the **SPEAKER** button to activate the speakerphone function for hands-free conversation.



This phone allows both ends to speak and be heard at the same time. Enjoy conversations that are more true to life.

Image: The full-duplex speakerphone allows for clear, hands-free communication, enabling users to multitask while on a call.

Call Management

- **Smart Call Blocker:** To block an unwanted call, press the **CALL BLOCK** button during a call or after reviewing Caller ID history. Follow the prompts to add the number to the block list. The system can store up to 1,000 blocked numbers.

1,000 name and number smart call block directory




You can permanently blacklist up to 1,000 numbers with one touch.

Image: The Smart Call Blocker feature prevents unwanted calls from ringing through, displaying a 'Blocked call' notification on the handset screen.

- **Quiet Mode:** Activate Quiet Mode through the handset menu to silence the ringer for a specified period, preventing interruptions.

Digital Answering System

- **Turning On/Off:** Press the **ANSWER ON/OFF** button on the main base unit to activate or deactivate the answering system.
- **Playing Messages:** Press the **PLAY/STOP** button on the main base unit or access the answering system menu on a handset to listen to messages.
- **Remote Access:** You can access your answering system remotely by calling your home phone number from an outside line and entering your remote access code.

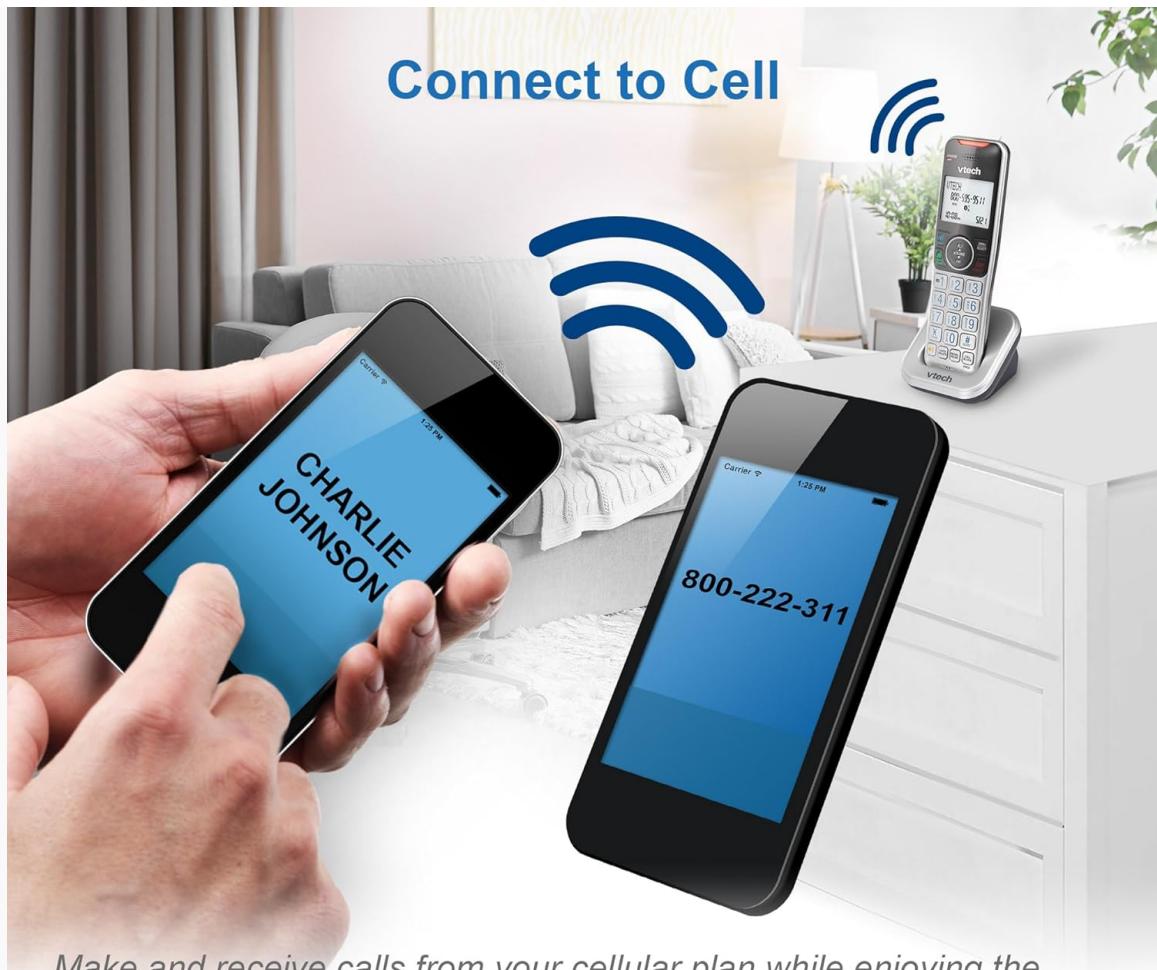

Make and receive calls from your cellular plan while enjoying the comforts of a home phone. Pair up to 2 cell phones and connect 2 cell phones or one cell phone and one BLUETOOTH headset for use with landline calls.

Image: The digital answering system on the base unit features an LED counter to show the number of new messages, ensuring you stay informed.

Expanding the System

The VTech VS112-4W system is expandable up to a total of 5 handsets. Additional VS112-0 accessory handsets can be purchased separately and registered to the main base unit. Refer to the accessory handset's manual for specific registration instructions.

MAINTENANCE

- **Cleaning:** Clean the telephone's exterior with a soft, damp cloth. Do not use cleaning sprays or harsh chemicals.
- **Battery Care:** Replace rechargeable batteries when they no longer hold a charge. Use only the specified replacement batteries.
- **Environmental Conditions:** Avoid exposing the telephone to extreme temperatures, direct sunlight, or moisture.

TROUBLESHOOTING

No Dial Tone

- Ensure the telephone line cord is securely plugged into both the base unit and the wall jack.
- Verify that the base unit's power adapter is correctly connected to an electrical outlet.

- If using a DSL service, ensure a DSL filter is installed.

Handset Not Charging

- Check that the handset is properly seated in its charger cradle or the main base unit.
- Ensure the charger cradle's power adapter is plugged into a working electrical outlet.
- Clean the charging contacts on both the handset and the charger with a dry cloth.

Poor Call Quality

- Move the handset closer to the main base unit.
- Avoid placing the base unit near other electronic devices (e.g., microwaves, Wi-Fi routers) that may cause interference.
- Ensure the telephone line cord is not damaged.

SPECIFICATIONS

Feature	Detail
Brand	VTech
Model Number	VS112-4W
Telephone Type	Cordless DECT 6.0
Number of Handsets	4 (Expandable up to 5)
Answering System Type	Digital (22 minutes recording time)
Display	2" White Backlit
Call Blocking	Smart Call Blocker (up to 1,000 numbers)
Bluetooth Connectivity	Connect to Cell (pair up to 2 cell phones)
Power Source	Battery Powered (4 Product Specific batteries included)
Dimensions	11.48 x 18.2 x 22.5 cm; 1.41 kg
Color	Black/Silver

WARRANTY AND SUPPORT

For warranty information and technical support, please refer to the documentation included with your product or visit the official VTech website. Keep your purchase receipt as proof of purchase for warranty claims.

PRODUCT VIDEOS

Your browser does not support the video tag.

Video: This official VTech video provides an overview of the DECT 6.0 Cordless Phone features, including Caller ID, backlit keypad and screen, and full-duplex speakerphone capabilities.

