

Danfoss
**VF 2 Way
Seated
Flange**



Danfoss VF 2 Way Seated Flange Instructions

[Home](#) » [Danfoss](#) » Danfoss VF 2 Way Seated Flange Instructions 

Contents

- [1 Danfoss VF 2-Way Seated Flange](#)
- [2 Specifications](#)
- [3 Product Usage Instructions](#)
- [4 Documents / Resources](#)
 - [4.1 References](#)

Danfoss

Danfoss VF 2-Way Seated Flange



Specifications

- Product Models: VF, VFS, VRB, VRG
- Compatible Models:
 - AMV 323 VF 2/3, VFS 2 DN 15 – 50 VRB, VRG DN 15 – 50
 - AMV 423, AMV 523 VF 2/3, VFS 2 DN 15 – 100 VRB, VRG DN 15 – 50
 - AMV(E) 15 / 16* VF 2/3, VFS 2 DN 15 – 50 (32*) VRB, VRG DN 15 – 50 (32*)
 - AMV(E) 25, 35 VF 2/3, VFS 2 DN 15 – 50 VRB, VRG DN 15 – 50
 - AMV(E) 55 / 56 VF 2/3 DN 65 – 150 VFS 2 DN 65 – 100
 - AMV(E) 85 / 86 VF 2/3 DN 125 – 150 VFS 2 DN 65 – 100


Product Usage Instructions

Application Principle (VRB 3 only)

Anwendungsbeispiel (nur VRB 3)


VF, VFS, VRB, VRG

Ensure the appropriate model is selected based on the compatibility list provided.

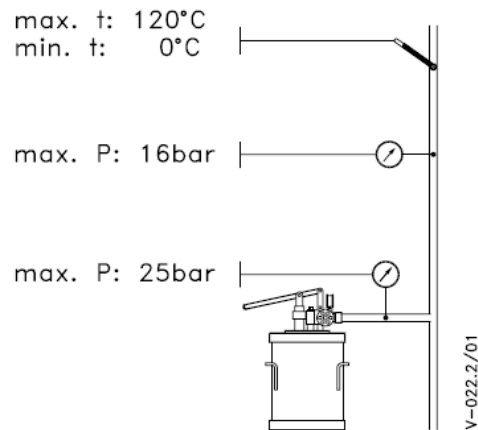

VF2 / VF3

Follow the installation guidelines specific to these models for proper functioning.

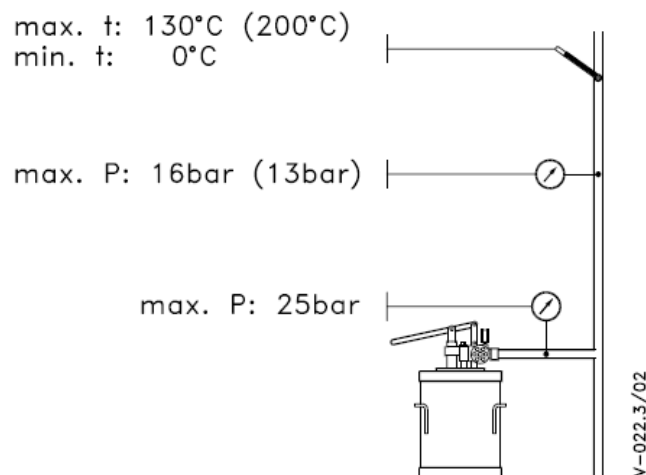


VFS 2

Refer to the user manual for detailed instructions on using the VFS 2 model.

max. t: 120°C (200°C)
min. t: 0°C

max. P: 25bar (20bar)

max. P: 40bar

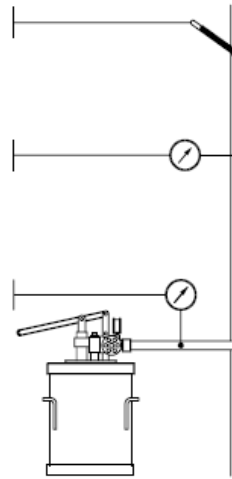

V-022.4/01



VF 2




VF 3




VFS 2




VRB, VRG




AMV 323
VF 2/3, VFS 2 DN 15 - 50
VRB, VRG DN 15 - 50




AMV 423, AMV 523
VF 2/3, VFS 2 DN 15 - 100
VRB, VRG DN 15 - 50




AMV(E) 15 / 16*
VF 2/3, VFS 2 DN 15 - 50 (32*)
VRB, VRG DN 15 - 50 (32*)












AMV(E) 25, 35
VF 2/3, VFS 2 DN 15 - 50
VRB, VRG DN 15 - 50



AMV(E) 55 / 56
VF 2/3 DN 65 - 150
VFS 2 DN 65 - 100

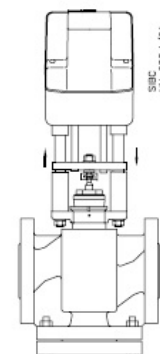

AMV(E) 85 / 86
VF 2/3 DN 125 - 150
VFS 2 DN 65 - 100

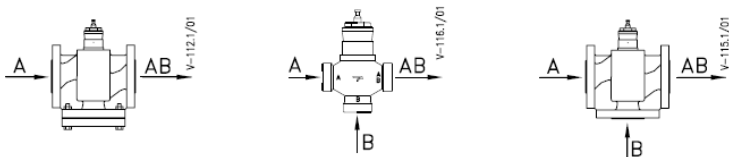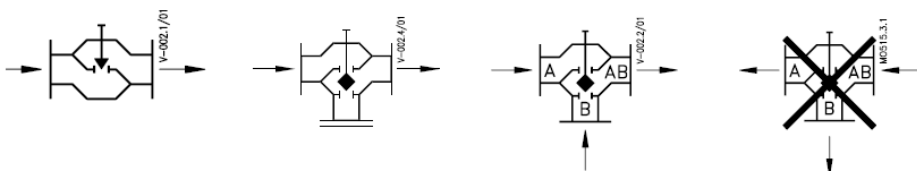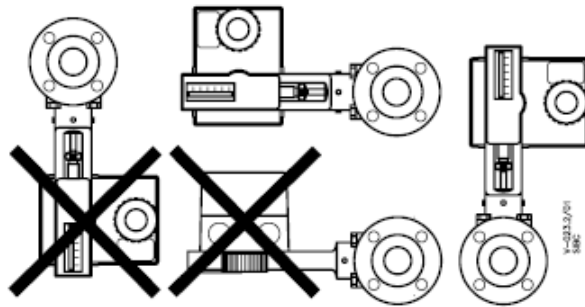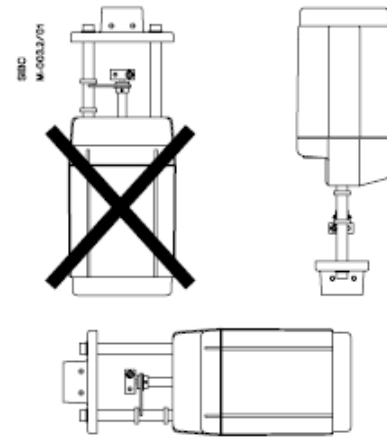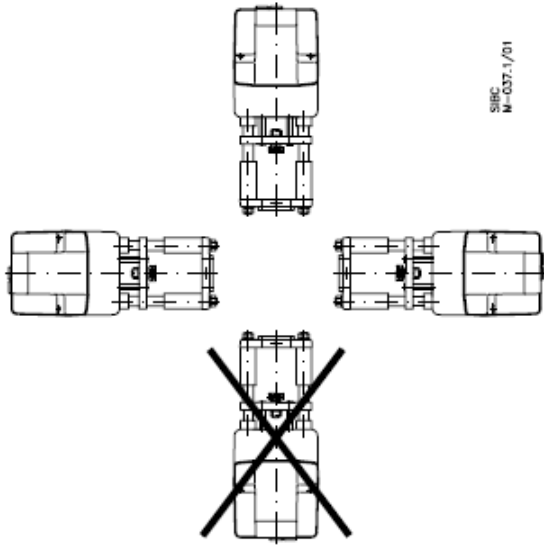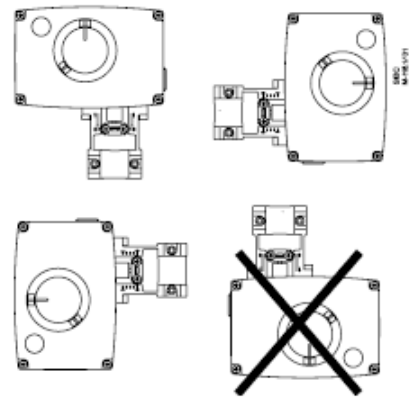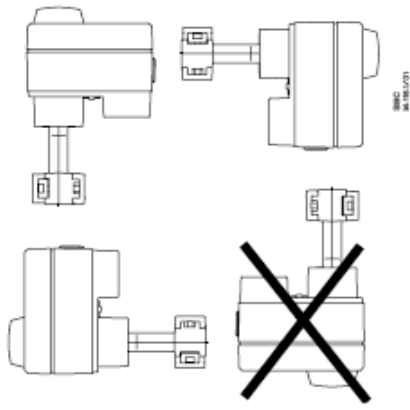

- Application principle (VRB 3 only)
- Anwendungsbeispiel (nur VRB 3)

Note

VRB 3 has DVGW approval (can only be used as a 3-way mixing valve).

Bemerkung

VRB 3 ist DVGW geprüft. (Kann nur als 3-Wege Mischventil verwendet werden.)

FAQs


Q: Can the product be used for both residential and commercial purposes?

A: The usage may vary based on the specific model and application. Refer to the user manual for detailed information on residential and commercial use.

Q: How do I know which model is suitable for my application?

A: Refer to the compatibility list provided in the specifications section to find a suitable model for your requirements.

Documents / Resources



[Danfoss VF 2 Way Seated Flange](#) [pdf] Instructions

323 VF 2-3, VFS 2 DN 15 - 50 VRB, VRG DN 15 - 50, 423, 523 VF 2-3, VFS 2 DN 15 - 100 VRB, VRG DN 15 - 50, VF 2 Way Seated Flange, VF, 2 Way Seated Flange, Way Seated Flange, Seated Flange, Flange

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.