

DAS-4 LD11 LCD Screen User Manual

Home » DAS 4 » DAS-4 LD11 LCD Screen User Manual



LD11 User Manual LCD screen


Contents

- 1 REGULAR DISPLAY AND BUTTON OPERATION HOW TO CHANGE THE DISPLAY MODE
- 2 HOW TO DISPLAY CALENDAR
- **3 HOW TO SET NORMAL TIME**
- **4 HOW TO USE TIMER**
- **5 CARE OF YOUR WATCH**
- **6 FEATURES AND SPECIFICATIONS**
- 7 Documents / Resources
- **8 Related Posts**


REGULAR DISPLAY AND BUTTON OPERATION




HOW TO CHANGE THE DISPLAY MODE

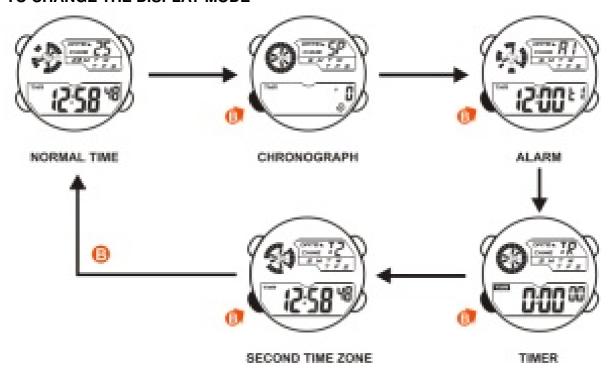


HOW TO DISPLAY CALENDAR

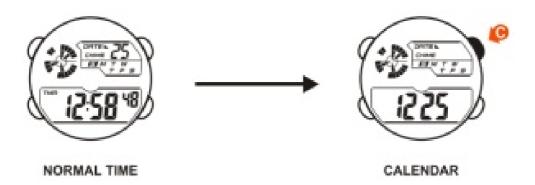


HOW TO SET NORMAL TIME

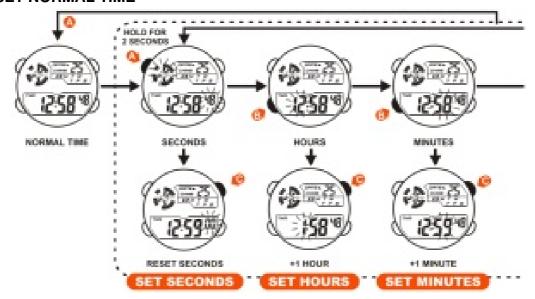


HOW TO SET NORMAL TIME

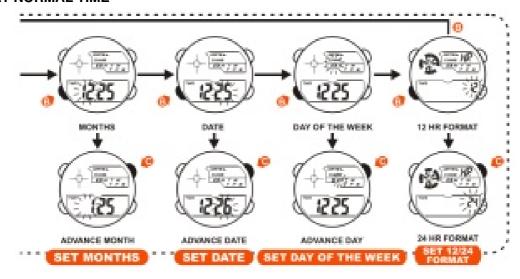


HOW TO SET ALARM TIME

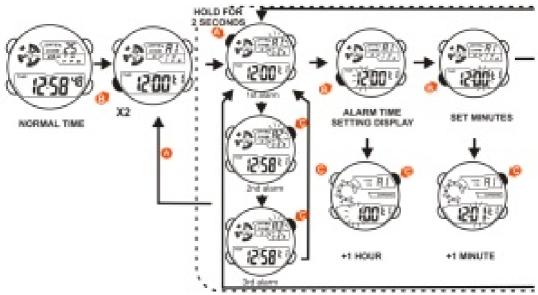


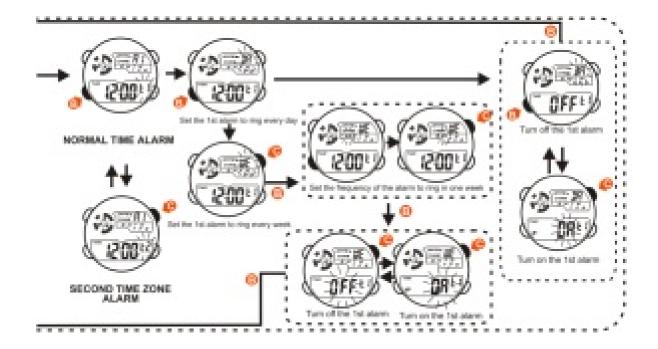


HOW TO SET THR ALARM RINGING ON THE HOUR AND KEY TONE

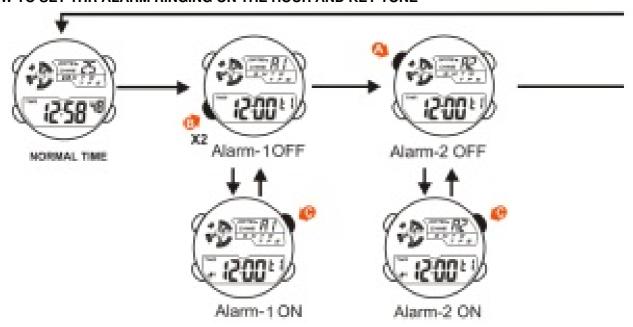


HOW TO SET THR ALARM RINGING ON THE HOUR AND KEY TONE

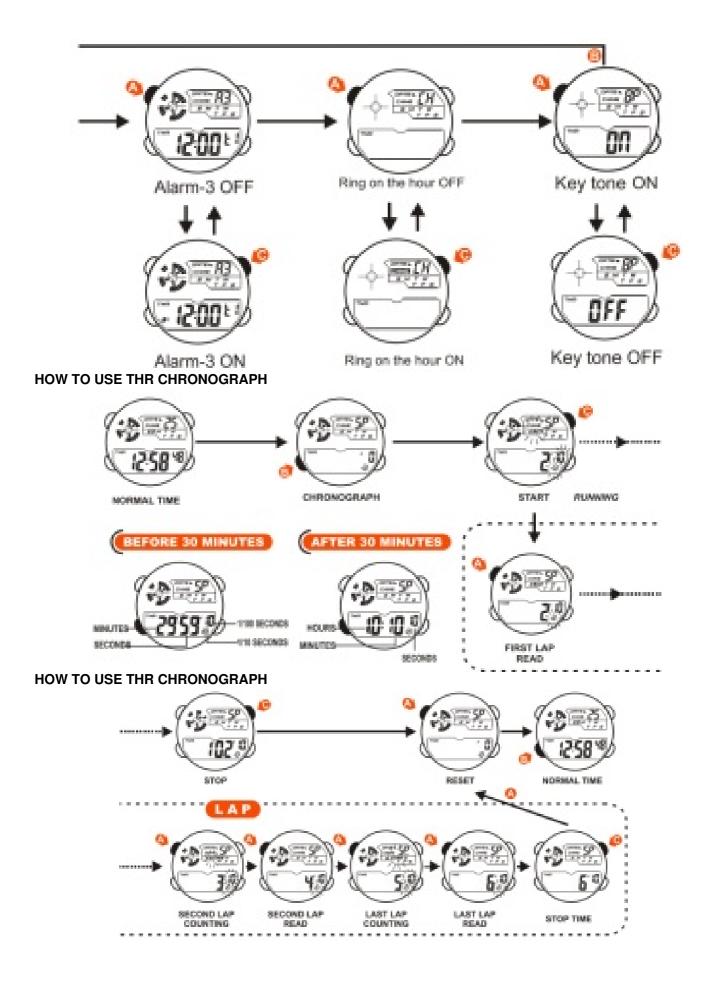


HOW TO USE TIMER

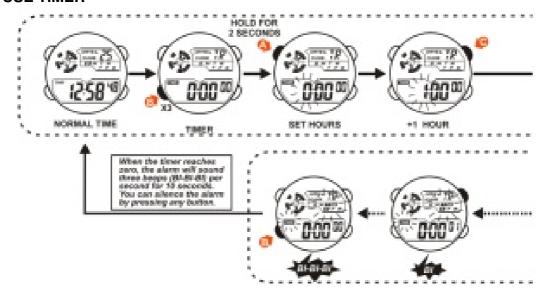


HOW TO USE TIMER

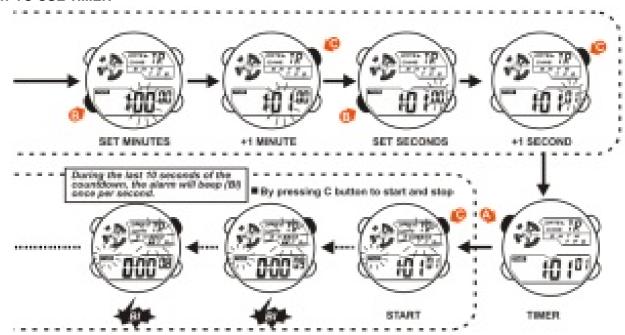

HOW TO SET SECOND TIME ZOME

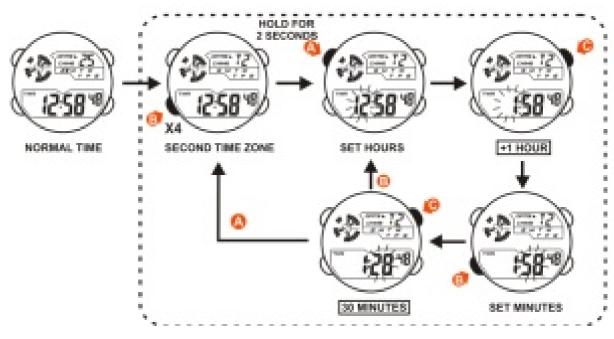

HOW TO USE EL LIGHT

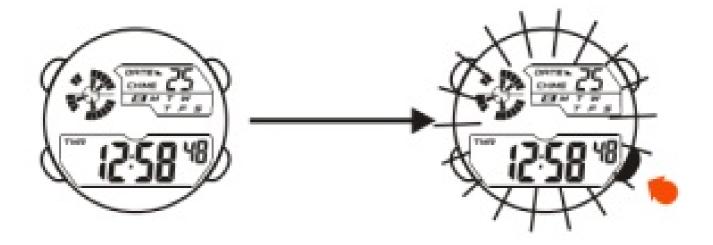

CARE OF YOUR WATCH

- 1. This watch contains precision electronic components. Never attempt to open the case or remove the back cover.
- 2. Do not operate buttons while underwater, or while swimming or diving.
- 3. Should water or condensation appear in the watch, immediately have the watch checked? Water can corrode electronic parts inside the case.
- 4. Avoid severe impact: The watch is designed to withstand impact under normal use. Do not subject it to severe impacts or rough usage, and do not drop it onto hard surfaces.
- 5. Avoid exposing the watch to temperature extremes.
- 6. Clean the watch with a soft cloth and dean water only. Avoid using chemicals, especially soap. 7.


Keep your watch away from strong electric fields and static electricity.

FEATURES AND SPECIFICATIONS

- 1. Standard display mode: Hour, Minutes, Seconds, Month, Day of the week.
- 2. Function:
- Month, Date AM/PM and Electro-Luminescent light.
- · Alarm function with buzzer signal output
- Chronograph function with lap operation.
- · Hourly chime.
- 12(24-hour format switch option.
- Timer.
- · Second-time zone.
- 3. Accuracy at normal temperature (25t):±30 seconds a month.
- 4. Normal operating temperature range: 10t 40t.

Waterproof up to 100 meters depth www.das-4.com

Documents / Resources

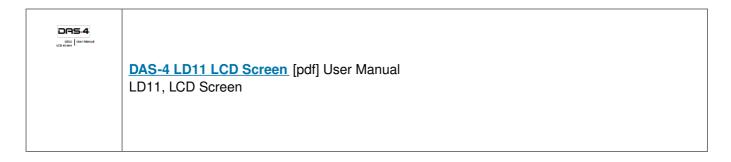

Manuals+,