



## DAYTONAUDIO 100W 2.1 Class D Bluetooth Amplifier DTA-2.1BT2 User Manual

[Home](#) » [DAYTONAUDIO](#) » DAYTONAUDIO 100W 2.1 Class D Bluetooth Amplifier DTA-2.1BT2 User Manual 

DAYTONAUDIO 100W 2.1 Class D Bluetooth Amplifier  
DTA-2.1BT2 User Manual



# 100W 2.1 CLASS D BLUETOOTH AMPLIFIER WITH SUB FREQUENCY ADJUSTMENT

Model: DTA-2.1BT2 User Manual




## Contents

- [1 INTRODUCTION](#)
- [2 AMPLIFIER CONNECTIONS](#)
- [3 CONNECTING SPEAKERS AND SETUP](#)
- [4 LINE LEVEL INPUT CONNECTION](#)
- [5 BLUETOOTH CONNECTION](#)
- [6 Documents / Resources](#)
- [7 Related Posts](#)


## INTRODUCTION

The DTA-2.1BT2 Amplifier provides clean Class D power from a super compact and lightweight form factor. Using the included power supply, this amplifier can power most speakers and passive subwoofer for your home or office. The DTA-2.1BT2 has standard stereo RCA and 3.5mm inputs on the rear panel. The Bluetooth technology is convenient wireless connectivity.

## AMPLIFIER CONNECTIONS

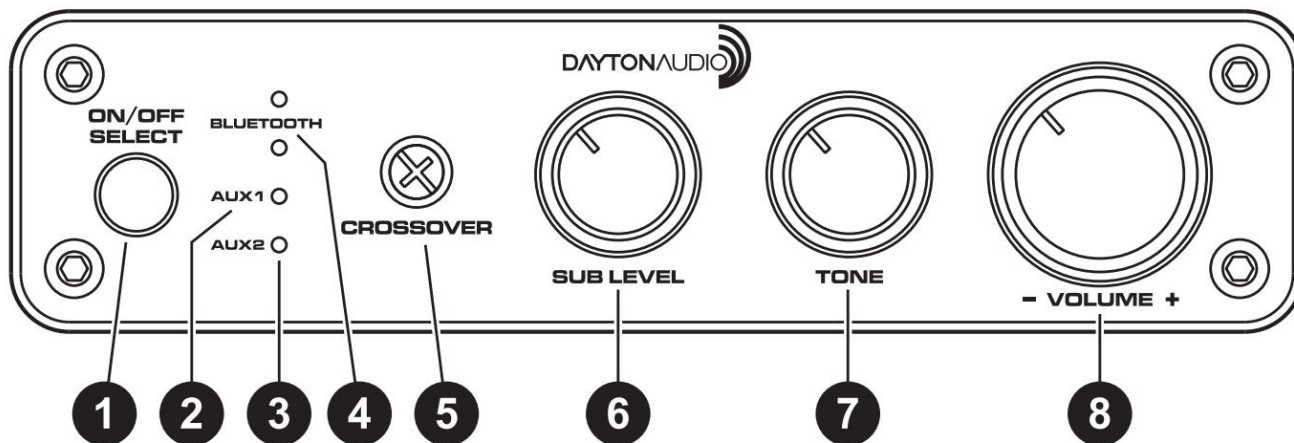

Front View of Amplifier

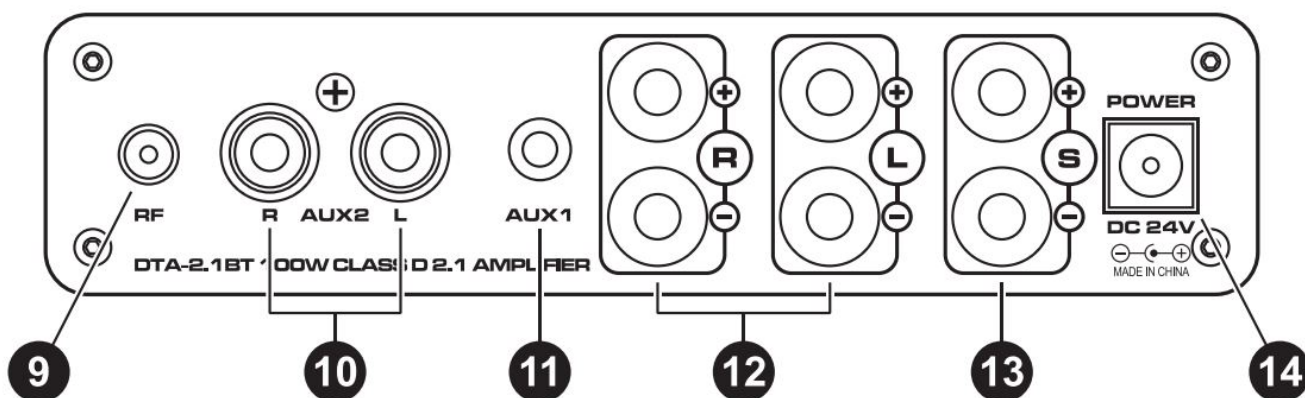

Rear view of Amplifier

### Front Panel

1. Power and source select
2. AUX1 source indicator
3. AUX2 source indicator
4. BT source indicator
5. Subwoofer crossover
6. Subwoofer volume
7. Tone control
8. Master volume

### Rear Panel

9. BT antenna connection
10. AUX2 L/R RCA
11. AUX1 3.5 mm
12. R/L speaker outputs
13. Subwoofer output
14. Power input

## CONNECTING SPEAKERS AND SETUP

The DTA-2.1BT2 features professional and convenient binding post style speaker connectors.

**Note:** The binding posts will accommodate (dual) banana plugs or bare speaker wire.

- Connect 4-8 Ohm passive speakers and subwoofer to the rear panel binding posts; be sure the polarity is correct.
- Plug the power supply into the amplifier and into the wall outlet.

#### LINE LEVEL INPUT CONNECTION

- Connect your source device (3.5 Aux 1 / RCA Aux 2) to the amplifier.
- Power on the amplifier with a long press of the ON/OFF button.
- Short press the select button to select the input, the red led indicator will illuminate under the selected input type.

#### BLUETOOTH CONNECTION

The Bluetooth audio source device must be paired to the DTA-2.1BT2 to play music wirelessly from your phone, tablet, or other device.

- Turn on the amplifier with a long press of the ON/OFF button.
- Select the Bluetooth input by short press of the select button.
- Search for DTA2.1BT2 on your mobile device.
- You will hear a series of tones and see the BT indicator lights flashing red/blue, the amplifier is now in pairing mode.
- From your mobile device Bluetooth menu select “DTA-2.1BT2”.
- The DTA-2.1BT2 BT indicator light will change to a slow pulsing red and will emit a short beep to inform you that the mobile device is successfully paired with the amplifier.

**Note:** Adjust the output level of the mobile device to approximately 75% and then adjust the master volume on the amplifier to the ideal listening level, this will give you the best sound quality.

**Note:** If your Bluetooth device has trouble pairing or connecting to the amplifier, it may be necessary to repeat the connection process for the amplifier and mobile device.

**Note:** The power button and select button are the same. Long press the ON/OFF button to power on and off the amplifier, short press select button to change the input selection.

## SPECIFICATIONS:

<b>Power Output:</b>	50 Watts x 2
<b>Power Output Subwoofer:</b>	100 Watts
<b>Sub Crossover</b>	50Hz to 120Hz
<b>Impedance:</b>	4-8 Ohms
<b>Power Input:</b>	24 VDC
<b>Amplifier Class:</b>	Class D
<b>Bluetooth Distance:</b>	Up to 30 meters
<b>Bluetooth Compatibility:</b>	A2DP, AVRCP


**5-Year Limited Warranty**  
See [daytonaudio.com](http://daytonaudio.com) for details



[daytonaudio.com](http://daytonaudio.com)  
tel + 937.743.8248  
[info@daytonaudio.com](mailto:info@daytonaudio.com)

705 Pleasant Valley Dr.  
Springboro, OH 45066 USA





**[DAYTONAUDIO 100W 2.1 Class D Bluetooth Amplifier DTA-2.1BT2](#)** [pdf] User Manual  
DAYTONAUDIO, 100W, 2.1 Class D, Bluetooth, Amplifier, DTA-2.1BT2