

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [MAYFLASH](#) /

› [MAYFLASH Arcade Stick F700 Elite User Manual](#)

MAYFLASH F700E

MAYFLASH Arcade Stick F700 Elite User Manual

Model: F700E | Brand: MAYFLASH

INTRODUCTION

The MAYFLASH Arcade Stick F700 Elite is a versatile fighting stick designed for an authentic arcade experience across multiple platforms. It features high-quality Sanwa components for precise control and offers multiple connection options including wireless Bluetooth, 2.4G, and wired USB. This manual provides detailed instructions for setup, operation, and maintenance of your F700 Elite arcade stick.

COMPATIBILITY

The F700 Elite is compatible with a wide range of gaming systems:

- PS5 (for fighting games like SF6, Tekken 8, MK1, MK11 etc.)
- PS4, PS3
- Nintendo Switch, Switch 2
- Windows PC (Xinput/Dinput)
- Apple macOS/iOS/iPadOS
- Android devices
- SEGA Mega Drive Genesis mini, Astro City mini, NEOGEO mini, NEOGEO Arcade Stick PRO
- Raspberry Pi, Steam Deck

Note: This device is specifically designed for fighting games and may not support other game genres. It is not compatible with Xbox Series S/X and Xbox One.

KEY FEATURES

- **Premium Sanwa Components:** Equipped with 8 highly responsive Sanwa buttons and a precision 4-way Sanwa joystick for optimal performance.
- **Multiple Connection Methods:** Supports Bluetooth, 2.4G wireless, and wired USB connections.
- **Integrated 2.4G Receiver Storage:** The included 2.4G receiver can be safely stored in a hidden compartment within the arcade stick.
- **Audio Support:** Supports wired headsets for background music and online chat on PS5, PS4, and PC Xinput.
- **Turbo Functions:** Features adjustable Turbo speed settings for rapid input.

- **Anti-slip Design:** A full-size anti-slip rubber mat on the bottom ensures stability during intense gameplay.
- **Moddable Design:** Features an acrylic clear panel, replaceable PVC paper, top metal panel, bottom metal panel, and rubber cushion, allowing for customization.
- **Long Battery Life:** Equipped with a 1000mAh battery providing up to 20 hours of wireless gameplay.



Image: The F700 Elite showcasing its Sanwa joystick and buttons.

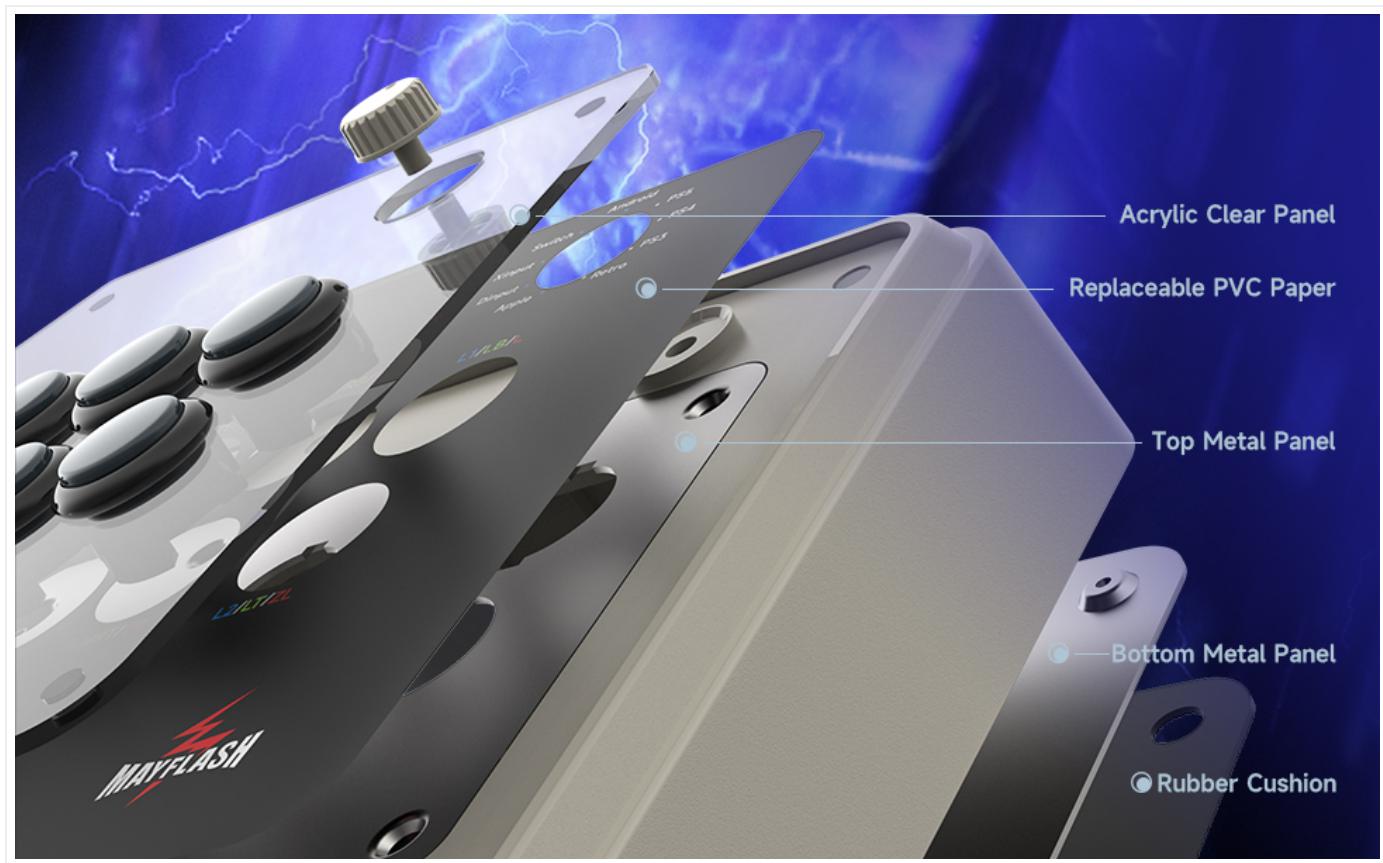


Image: An exploded view illustrating the internal layers of the F700 Elite, including the acrylic clear panel, replaceable PVC paper, top metal panel, bottom metal panel, and rubber cushion.

SETUP

1. Connection Methods

The F700 Elite offers three primary ways to connect to your gaming system:

1.1. 2.4G Wireless Connection

1. Locate the hidden compartment on the side of the arcade stick and retrieve the 2.4G wireless receiver.
2. Plug the 2.4G receiver into an available USB port on your gaming console or PC.
3. On the F700 Elite, slide the connection mode switch to the "2.4G" position.
4. Press the "SYNC" button on the arcade stick to initiate pairing. The indicator light will show successful connection.



Image: The F700 Elite with its hidden compartment open, revealing the 2.4G wireless receiver.



Image: A detailed view of the 2.4G wireless receiver being stored in its dedicated compartment on the F700 Elite.

1.2. Wired USB Connection

1. Connect the USB cable from the F700 Elite to an available USB port on your gaming console or PC.
2. Slide the connection mode switch on the F700 Elite to the "USB" position.
3. The arcade stick will automatically be recognized by your system.

1.3. Bluetooth Connection

1. Slide the connection mode switch on the F700 Elite to the "BT" (Bluetooth) position.
2. On your gaming console or device (e.g., Nintendo Switch, Apple device, Android device), navigate to the Bluetooth settings.
3. Initiate a search for new Bluetooth devices.
4. Select "MAYFLASH F700 Elite" from the list of available devices to pair.
5. Ensure your firmware is updated for optimal performance, especially for Switch 2 compatibility.

2. Mode Switching

The F700 Elite features a rotary knob to select the appropriate input mode for your connected system. Ensure the correct mode is selected for proper functionality.

- **Switch:** For Nintendo Switch and Switch 2.
- **Xinput:** For Windows PC, Raspberry Pi, Steam Deck.
- **Dinput:** For PC Dinput.
- **Apple:** For Apple macOS/iOS/iPadOS devices.
- **Android:** For Android devices.
- **PS5:** For PlayStation 5 (fighting games only).
- **PS4:** For PlayStation 4.
- **PS3:** For PlayStation 3.
- **Retro:** For SEGA Mega Drive Genesis mini, Astro City mini, NEOGEO mini, NEOGEO Arcade Stick PRO.



Image: A close-up of the rotary knob used to select the desired platform mode on the F700 Elite.



Platform	Device	2.4G	USB	BT
PS5	PlayStation 5	✓	• ⓘ	BT ×
PS4	PlayStation 4	✓	• ⓘ	BT ×
PS3	PlayStation 3	✓	✓	BT ×
Switch	Switch/Switch OLED/Switch lite	✓	✓	BT ✓
Xinput	PC Xinput/Raspberry Pi/Steam Deck	✓	✓	BT ✓
Dinput	PC Dinput	✓	✓	BT ✓
Apple	MacBook/iMac/iPad/iPhone	✓	✓	BT ✓
Android	Android devices	✓	✓	BT ✓
Retro	SEGA Mega Drive/Genesis mini/Astro City mini/SNK NEOGEO mini/NEOGEO Arcade Stick PRO	✓	✓	BT ×

Image: A comprehensive compatibility table detailing supported platforms and their respective connection methods (2.4G, USB, Bluetooth) for the F700 Elite.

OPERATING INSTRUCTIONS

1. Basic Controls

The F700 Elite features a standard arcade layout with a joystick and eight action buttons. Familiarize yourself with the button assignments for your specific game and platform.



Image: Top-down view of the MAYFLASH F700 Elite arcade stick, showing the joystick and button layout.

2. Special Functions

2.1. Turbo Function

The Turbo function allows for rapid, automatic pressing of a selected button. To activate or deactivate Turbo for a button:

1. Press and hold the **TURBO** button.
2. While holding **TURBO**, press the desired action button (e.g., A, B, X, Y) to enable/disable Turbo for that button.
3. Adjust Turbo speed using specific button combinations (refer to the detailed manual for specific speed settings).

2.2. L3/R3 Mapping

The F700 Elite supports mapping L3 and R3 inputs using button combinations:

- To activate **L3**: Press **TURBO + SHARE** simultaneously.
- To activate **R3**: Press **TURBO + START** simultaneously.



Image: A diagram illustrating the button combinations for activating L3 (TURBO + SHARE) and R3 (TURBO + START) on the F700 Elite.

3. Headset Functionality

Connect a wired headset to the 3.5mm audio jack on the F700 Elite to output game background music and enable online chat on compatible platforms (PS5, PS4, PC Xinput).



Image: A close-up view of the 3.5mm headset port located on the side of the F700 Elite arcade stick.

MAINTENANCE

- Keep the arcade stick clean by wiping it with a soft, dry cloth. Avoid using harsh chemicals or abrasive materials.
- Store the device in a cool, dry place away from direct sunlight and extreme temperatures.
- When not in use, ensure the 2.4G wireless receiver is stored in its dedicated compartment to prevent loss.
- Periodically check for firmware updates on the official MAYFLASH website to ensure optimal performance and compatibility with new systems.

TROUBLESHOOTING

Problem	Solution
Arcade stick not responding on PC.	Ensure the mode knob is set to "Xinput" for most PC games. If using Dinput, select "Dinput". Verify USB cable connection or 2.4G receiver insertion.
Wireless connection issues.	Ensure the connection mode switch is set to "2.4G" or "BT" as appropriate. Press the "SYNC" button to repair. Check battery level. Move closer to the receiver/device to reduce interference.
Turbo function not working or stuck.	Ensure you are pressing and holding the TURBO button while pressing the desired action button. Repeat the process to toggle Turbo on/off for that button.
No audio through headset.	Verify the headset is fully plugged into the 3.5mm jack. Ensure the connected platform (PS5, PS4, PC Xinput) supports audio output through the stick. Check system audio settings.
PS5 compatibility issues.	The F700 Elite supports PS5 in PS4 legacy mode, primarily for fighting games. Not all PS5 games will be compatible. Ensure the mode knob is set to "PS5" or "PS4" as required by the game.

SPECIFICATIONS

- Model Number:** F700E
- Dimensions:** 14.72 x 9.69 x 2.48 inches
- Weight:** Approximately 7.48 pounds

- Battery:** 1 Lithium Polymer battery (included), 1000mAh, up to 20 hours playtime.
- Components:** Sanwa joystick and buttons
- Connection Types:** Bluetooth, 2.4G Wireless, Wired USB
- Audio:** 3.5mm headset jack (supports background music and online chat on PS5, PS4, PC Xinput)

OFFICIAL PRODUCT VIDEO

Your browser does not support the video tag.

Video: This official MAYFLASH video demonstrates the wireless and wired connection methods of the F700 Elite arcade stick, along with gameplay footage showcasing its performance.



WARRANTY AND SUPPORT

For warranty information, technical support, or further inquiries, please visit the official MAYFLASH website or contact their customer support team. Keep your proof of purchase for warranty claims.

Official MAYFLASH Store: [MAYFLASH Store on Amazon](#)

© 2024 MAYFLASH. All rights reserved.

Related Documents - F700E

 <p>F700 Arcade Stick Quick Start Guide</p> <p>A concise guide to setting up and using the F700 Arcade Stick for various gaming consoles and platforms, including connection methods and features.</p>	 <p>F700 Arcade Stick and Dongle Quick Start Guide</p> <p>A quick start guide for the F700 Arcade Stick and Dongle, covering 2.4g, Bluetooth, and wired connections, as well as TURBO function and firmware upgrades.</p>	 <p>MAYFLASH Arcade Stick F500 Elite User Manual and Quick Start Guide</p> <p>Comprehensive guide for the MAYFLASH Arcade Stick F500 Elite, detailing its features, operation, and connectivity with various gaming consoles and platforms including PS4, Xbox, Switch, PC, Android, and more. Includes setup instructions and button mapping.</p>
---	--	---

 <p>Mayflash PS5 Adapter User Manual</p> <p>This manual provides instructions for using the Mayflash PS5 Adapter. It covers setup, connection to PS4/PS5 controllers, and troubleshooting. The adapter allows you to connect wired controllers to various gaming peripherals.</p>	<p>MAYFLASH PS5 Adapter: Connect PS4/PS5 Controllers to Joysticks & FPS Adapters</p> <p>Enhance your gaming experience with the MAYFLASH PS5 Adapter. This device allows you to connect wired PS4/PS5 controllers to joysticks and FPS gaming adapters for both PS4 and PS5 consoles. Features plug-and-play functionality and easy firmware updates.</p>
	<p>Mayflash MAGIC-S Ultimate USB Wireless Adapter User Manual</p> <p>User manual for the Mayflash MAGIC-S Ultimate USB Wireless Adapter, detailing its compatibility with various consoles and controllers, setup instructions for wired and wireless connections, and Bluetooth headset usage.</p>
	<p>Mayflash MAGIC-NS Wireless Controller Adapter User Manual</p> <p>User manual for the Mayflash MAGIC-NS Wireless Controller Adapter, detailing setup and usage for various gaming consoles including Nintendo Switch, PS3, PC, NEOGEO mini, and PS Classic. Covers wired and wireless controller connections, button mapping, and software updates.</p>