

DEGSON 2EDGRC-5.0-10030001451 Pluggable Terminal Block Instructions


[Home](#) » [DEGSON](#) » DEGSON 2EDGRC-5.0-10030001451 Pluggable Terminal Block Instructions 



Contents

- [1 Overview](#)
- [2 Product advantages](#)
- [3 Product certification](#)
- [4 Technical data](#)
- [5 Item properties](#)
- [6 Accessories](#)
- [7 Documents / Resources](#)
- [8 Related Posts](#)

Overview

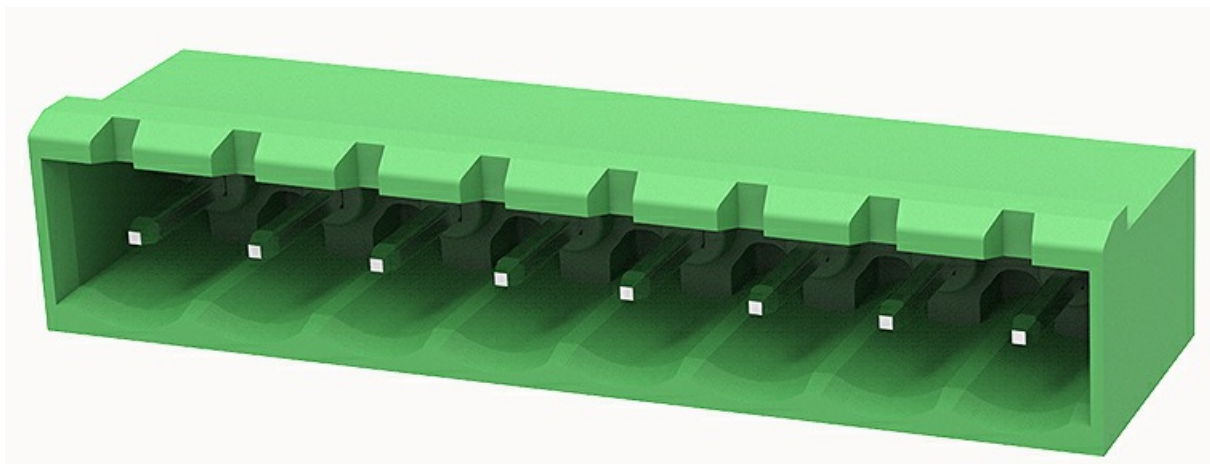

2EDGRC-5.0-10030001451

Pluggable terminal blocks, Rated current:20A.Rated voltage III /2 :320V,pitch:5.0mm,Color:green,Contact surface :Tin

Product advantages

- ☒ Universal installation method to ensure a high degree of flexibility in device design
- ☒ The plug direction is parallel to the PCB

Product certification



Technical data

Product drawing	
3D model	
Processing notes	
Process	Wave soldering/manual soldering
Electrical parameters UL	
Rated voltage (B)	300V
Rated voltage (D)	300V
Rated current (B)	15A
Rated current (D)	10A
Electrical parameters IEC	
Rated current	320V
	20A
Rated current(III/2)	320V
Rated surge voltage(III/2)	4KV

Item properties

Type of installation	PCB welding
Pin arrangement	Single row in a straight line
Pitch	5mm
Number of potentials	8
Pluggable or not	Yes
Number of rows	1
Material data	
Environmental items	Compliant with REACH/RoHS
Contact material	copper
Contact zone metal surface	tin-plated
Insulation Materials	PA66
Insulating material group	I
Flammability rating	UL94V-0
Environmental data	
Ambient temperature (operation)	-40 °C~105 °C

Accessories

Tool

Screwdriver	/
Operating tool	/
Accessories	
Coding strip	/
Bridge	/
Marking strip	/
Others	2EDG-PWP-01H
Business data	
Order number	10030001451
Packing unit	960
Minimum order quantity	30
Products weight (without packaging)	3.28



[DEGSON 2EDGRC-5.0-10030001451 Pluggable Terminal Block](#) [pdf] Instructions
2EDGRC-5.0-10030001451 Pluggable Terminal Block, 2EDGRC-5.0-10030001451, Pluggable Terminal Block, Terminal Block