

DERALE PERFORMANCE 16769 Adjustable Thermostat Switch Installation Guide

[Home](#) » [DERALE PERFORMANCE](#) » DERALE PERFORMANCE 16769 Adjustable Thermostat Switch Installation Guide 

DERALE PERFORMANCE 16769 Adjustable Thermostat
Switch Installation Guide



INSTALLATION INSTRUCTIONS ADJUSTABLE THERMOSTAT SWITCH PART # 16769

Please read these instructions completely before beginning installation

Contents

- [1 KIT CONTENTS](#)
- [2 TOOLS NEEDED](#)
- [3 THERMOSTAT SWITCH MOUNTING](#)
- [4 THERMOSTAT PROBE
INSTALLATION](#)
- [5 WIRING](#)
- [6 ADJUSTING THE TEMPERATURE](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)

KIT CONTENTS

QTY. DESCRIPTION

1 Thermostat Switch & Probe

- 1 Thermostat Bracket
- 1 1 1/2" x 1/2" Foam Pad
- 2 M4-0.7 Philips Head Bolts

QTY. DESCRIPTION

- 2 #10 Sheet Metal Screws
- 1 Spool Extra Wire
- 1 #10 Blue Ring Terminal

QTY. DESCRIPTION

- 1 Blue Wire Tap Connector
- 3 Blue Butt Connectors
- 2 Blue Female Connectors
- 4 4" Zip Ties

TOOLS NEEDED

- Standard Screw Driver
- Drill
- 5/32" Drill Bit
- 12V Test Light
- Wire Stripper
- Crimping Tool
- Wire Cutter Pliers

THERMOSTAT SWITCH MOUNTING

1. Using the two M4-0.7 Philips Head Screws, attach the Mounting Bracket to the Thermostat Switch. (See Diagram #1)
2. Locate the Thermostat Switch in an accessible location near the radiator inlet hose.
Note: The Capillary Tube Probe Cannot be lengthened or cut in any way.
3. Using the Mounting Bracket as a guide, mark and drill two 5/32" holes.
4. Using the two #10 Sheet Metal Screws provided, attach the Thermostat Switch.

THERMOSTAT PROBE INSTALLATION


Making sure the vehicles engine is cold; drain enough coolant out of the radiator so the upper radiator hose can be removed.

Warning: Coolant is a hazardous fluid, drain into container. Never open radiator cap or attempt to remove hose while motor is hot.

1. Remove radiator clamp and hose.
2. Insert thermostat probe into radiator hose. (See Diagram #2)
3. Place capillary tube on radiator inlet tube so the probe itself will remain positioned in the hose. Place the foam pad between the capillary tube and the radiator inlet tube. (See Diagram #2)
4. Carefully install radiator hose and tighten hose clamp.


Note: It is recommended that a screw type hose clamp is used for correct sealing (See Diagram #3). Factory type clamps can leak.

5. Double check coolant level, fill as required.

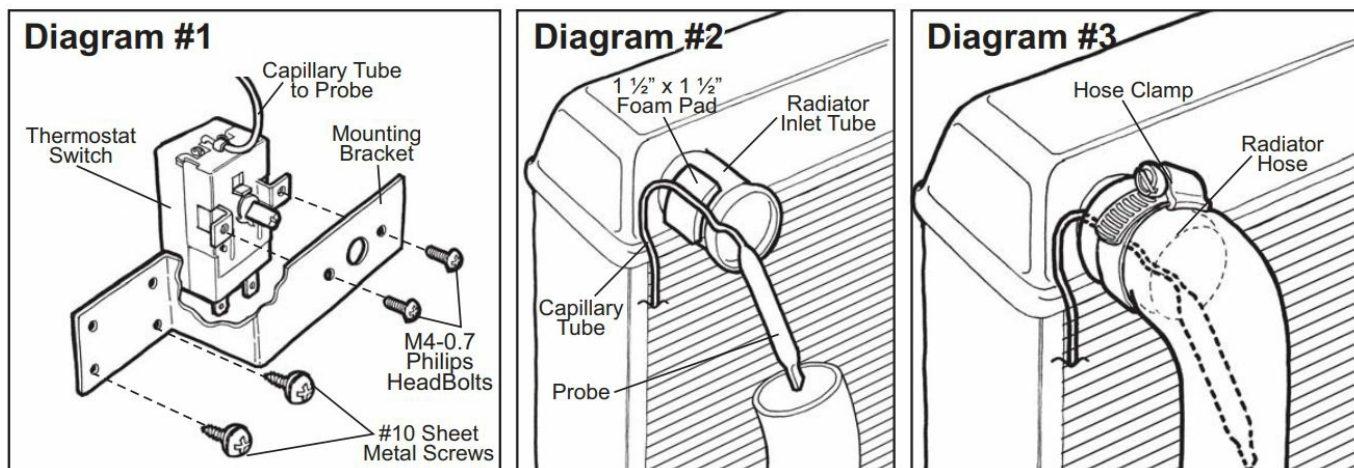

WIRING

1. Disconnect the Negative (-) terminal on the vehicles battery.
2. Using the #10 Blue Ring Terminal provided, attach the Negative (-) electric fan lead to a good Chassis Ground (-).
3. Using the extra Wire, Blue Female Connector, 20 Amp Fuse Holder (not provided) and Blue Butt Connectors provided, attach the Positive (+) electric fan lead to the RIGHT terminal on the Thermostat Switch. (See Diagram #4)
4. Using the extra Wire, Blue Female Connector and Blue Wire Tap Connector provided, attach the LEFT terminal on the Thermostat Switch to a 12V Positive (+) Switched Ignition Source.
5. Reattach the Negative (-) terminal on the vehicles battery.

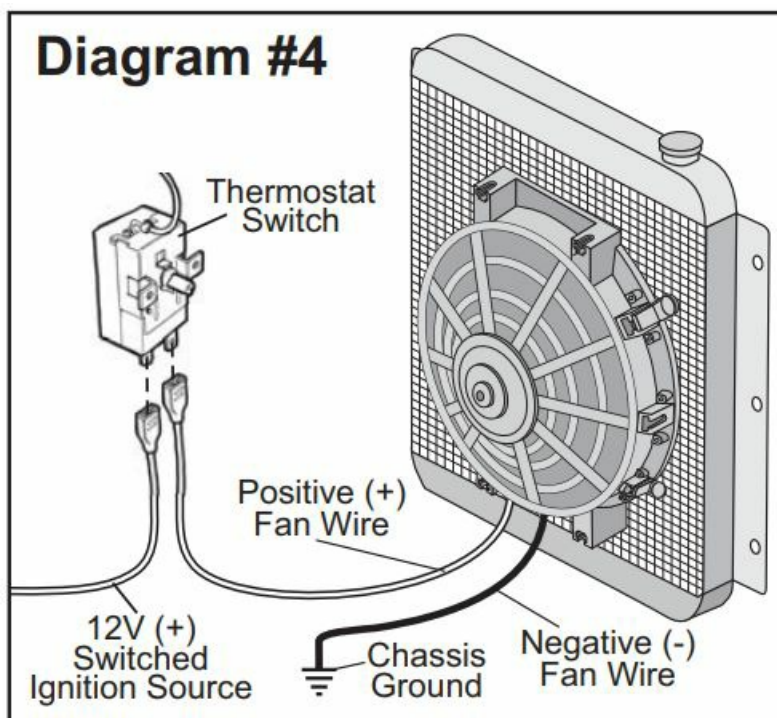


ADJUSTING THE TEMPERATURE

Adjustment range is 32°F to 240°F Higher turn-on temperature: Turn the adjuster clockwise. Lower turn-on temperature: Turn the adjuster counter clockwise. Adjust the thermostat to desired setting by turning the brass adjuster with a flathead screwdriver.

Note: Knob not included.

Warning: Installation of accessories should only be undertaken by those with mechanical knowledge and are familiar with working on vehicles. Always use eye protection (goggles, safety glasses or shield). Park the vehicle in a well lit area, on level ground and apply the parking brake. Only work on a cold vehicle that has been sitting overnight, failure to do so will result in severe burns and injury. Before starting the vehicle, make sure no tools or any other items are left under hood that could interfere with or be drawn into moving parts of the engine. Failure to follow instructions can lead to severe damage and personal injury.
Derale Performance, Los Angeles, CA 800.421.6288 www.derale.com

Documents / Resources

	<p>DERALE PERFORMANCE 16769 Adjustable Thermostat Switch [pdf] Installation Guide 16769, 16769 Adjustable Thermostat Switch, 16769, Adjustable Thermostat Switch, Thermostat Switch</p>
---	--

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.