

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

- › [Logitech](#) /
- › [Logitech G915 X Lightspeed Wireless Mechanical Gaming Keyboard User Manual](#)

Logitech 920-012670

Logitech G915 X Lightspeed Wireless Mechanical Gaming Keyboard User Manual

Model: 920-012670 | Brand: Logitech

INTRODUCTION

This manual provides comprehensive instructions for the setup, operation, maintenance, and troubleshooting of your Logitech G915 X Lightspeed Wireless Mechanical Gaming Keyboard. Designed for high-performance gaming and versatile connectivity, this keyboard features LIGHTSPEED wireless technology, GL mechanical switches, customizable G-keys, and LIGHTSYNC RGB lighting. Please read this manual thoroughly to ensure optimal use and longevity of your device.



Image: Top-down view of the Logitech G915 X Lightspeed Wireless Mechanical Gaming Keyboard, showcasing its full layout and RGB backlighting.

WHAT'S IN THE BOX

Upon unboxing your Logitech G915 X Lightspeed keyboard, verify that all the following components are present:

- Logitech G915 X Lightspeed Wireless Mechanical Gaming Keyboard
- LIGHTSPEED USB Receiver
- USB Extender
- USB-C Data/Charging Cable
- User Documentation (this manual)

WHAT'S IN THE BOX



**USB-A TO USB-C CHARGING
AND DATA CABLE**



USB EXTENDER



**USB WIRELESS
RECEIVER**



G915 X LIGHTSPEED

Image: All components included in the Logitech G915 X keyboard packaging, including the keyboard, USB-A to USB-C cable, USB extender, and USB wireless receiver.

SETUP

Initial Charging

Before first use, it is recommended to fully charge the keyboard.

1. Connect the supplied USB-C data/charging cable to the USB-C port on the keyboard (located on the top edge).
2. Connect the other end of the cable (USB-A) to a powered USB port on your computer or a USB wall adapter.
3. The battery indicator light on the keyboard will show charging status. A full charge typically takes approximately 4 hours.

Connecting the Keyboard

The G915 X offers three connectivity options: LIGHTSPEED Wireless, Bluetooth, and Wired USB.

TRI-MODE CONNECTIVITY



2.4 GHZ LIGHTSPEED
BLUETOOTH
WIRED DATA MODE

Image: Close-up of the Logitech G915 X keyboard's connectivity buttons (LIGHTSPEED, Bluetooth, Wired) located above the F5-F8 keys.

LIGHTSPEED Wireless (Recommended for Gaming)

1. Locate the LIGHTSPEED USB receiver. For optimal signal, use the USB extender to position the receiver closer to the keyboard.
2. Plug the LIGHTSPEED USB receiver into an available USB-A port on your computer.
3. On the keyboard, slide the power switch to the ON position (located on the top right).
4. Press the LIGHTSPEED button (indicated by a wireless signal icon) on the keyboard. The indicator light above the button will turn solid cyan when connected.

Bluetooth Connectivity

1. Ensure the keyboard is powered on.
2. Press and hold the Bluetooth button (indicated by a Bluetooth icon) on the keyboard until the indicator light above it starts blinking blue rapidly. This indicates pairing mode.
3. On your computer or device, navigate to Bluetooth settings and select "G915 X" from the list of available devices.
4. The indicator light will turn solid blue when successfully paired.

Wired USB Mode

1. Connect the USB-C data/charging cable to the keyboard and the USB-A end to your computer.
2. The keyboard will automatically switch to wired mode and begin charging.

OPERATING INSTRUCTIONS

Key Features Overview



Image: Diagram highlighting key features of the Logitech G915 X keyboard, including G-keys, USB-C port, double-shot PBT keycaps, low-profile switches, brushed aluminum top plate, volume roller, dedicated media keys, and LIGHTSYNC RGB.

- **GL Mechanical Switches:** Low-profile switches designed for speed, precision, and comfort with a 1.3mm actuation point.
- **LIGHTSPEED Wireless:** Pro-grade wireless technology for ultra-fast and reliable connection.
- **Bluetooth:** For connecting to other devices that support Bluetooth.
- **Dedicated Media Keys:** Control audio and video playback with ease.
- **Volume Roller:** Smoothly adjust audio volume.


- **LIGHTSYNC RGB:** Customizable per-key RGB lighting with approximately 16.8 million colors.
- **G-Keys (G1-G5):** Five dedicated programmable macro keys on the left side of the keyboard.
- **Double-Shot PBT Keycaps:** Durable keycaps resistant to wear and shine.

Customizing with G HUB Software

To unlock the full potential of your G915 X keyboard, download and install the Logitech G HUB software from the official Logitech website. G HUB allows for extensive customization.

- **G-Key Programming:** Assign custom macros, commands, or system functions to the G1-G5 keys. You can create multiple profiles for different games or applications.
- **LIGHTSYNC RGB Customization:** Personalize lighting effects, colors, and animations. Sync lighting with other Logitech G devices.
- **Game Mode:** Disable specific keys (e.g., Windows key) during gaming to prevent accidental interruptions.
- **KEYCONTROL:** Set up to 15 functions per key for advanced control.

CUSTOMIZE COMMANDS PER KEY

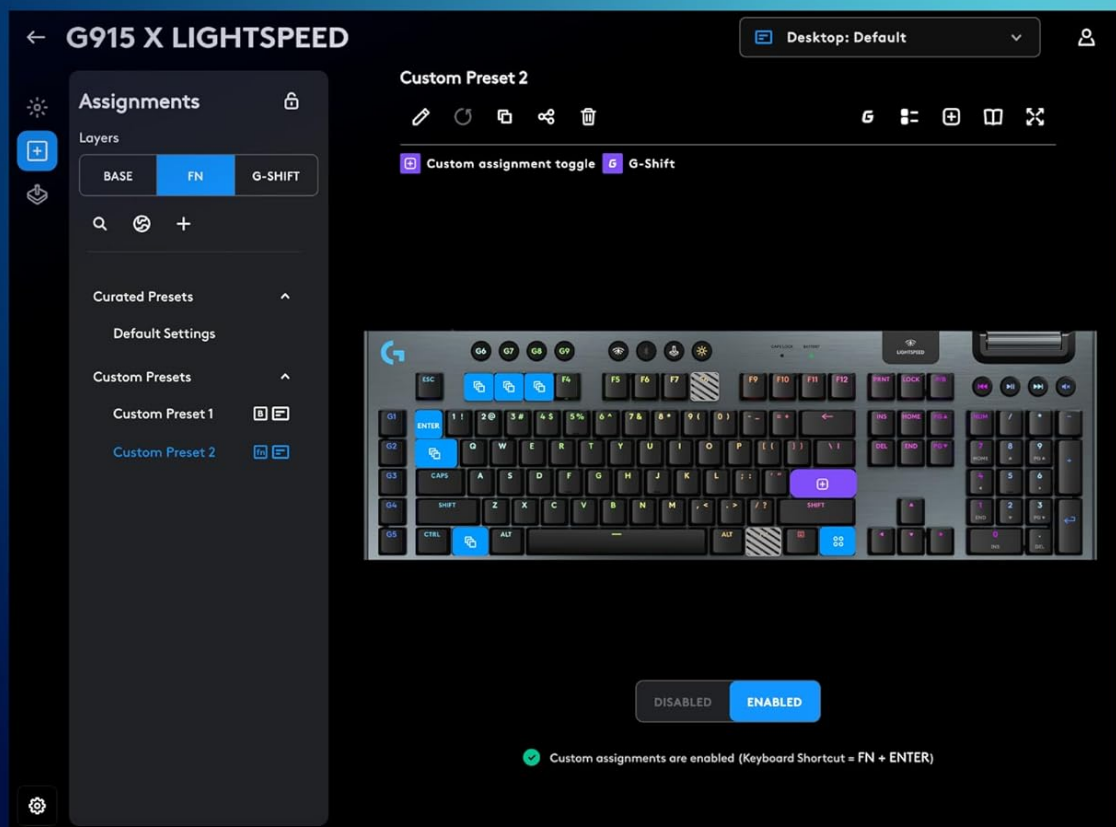

9 G-KEYS + KEYCONTROL

Image: Screenshot of the Logitech G HUB software interface showing options for customizing commands and assigning functions to G-keys on the G915 X keyboard.

Media Controls and Volume

Dedicated media controls and a volume roller are located on the top right of the keyboard for quick access.

- **Volume Roller:** Roll up to increase volume, roll down to decrease.
- **Media Buttons:**
 - Previous Track
 - Play/Pause
 - Next Track
 - Mute

BATTERY MANAGEMENT

The Logitech G915 X keyboard provides up to 36 hours of continuous battery life with lighting enabled. Battery life may vary based on usage and lighting intensity.

- **Battery Indicator:** A dedicated battery indicator light is located near the LIGHTSPEED logo on the top right. It changes color to indicate battery level.
- **Charging:** Connect the USB-C cable to the keyboard and a powered USB port. You can continue to use the keyboard in wired mode while it charges.
- **Power Saving:** The keyboard will enter a low-power state after a period of inactivity to conserve battery.

MAINTENANCE

Proper maintenance ensures the longevity and performance of your keyboard.

- **Cleaning Keycaps:** Use a soft, lint-free cloth slightly dampened with water or a mild cleaning solution. Avoid harsh chemicals.
- **Removing Dust/Debris:** Use compressed air to clear dust and debris from between the keycaps and switches.
- **Surface Cleaning:** Wipe the aluminum top plate with a soft, dry cloth.
- **Storage:** When not in use for extended periods, store the keyboard in a dry, cool place away from direct sunlight.

TROUBLESHOOTING

If you encounter issues with your Logitech G915 X keyboard, refer to the following common troubleshooting steps.

Problem	Possible Solution
Keyboard not responding (Wireless)	Ensure the keyboard is powered on. Check battery level and charge if low. Verify the LIGHTSPEED USB receiver is securely plugged into a working USB port. Ensure the keyboard is set to LIGHTSPEED mode (cyan indicator light). Try moving the receiver closer to the keyboard using the USB extender. Test on a different USB port.
Bluetooth connection issues	Ensure the keyboard is in Bluetooth pairing mode (blinking blue light). Remove "G915 X" from your device's Bluetooth list and re-pair. Ensure your device's Bluetooth is enabled and working. Try restarting both the keyboard and your device.

Problem	Possible Solution
Keys not registering or double-typing	Clean under the affected keycaps with compressed air to remove debris. Ensure the keyboard firmware is up to date via Logitech G HUB. If using wireless, try wired mode to rule out connectivity issues.
RGB lighting not working or incorrect	Ensure Logitech G HUB software is running and updated. Check lighting settings within G HUB. Verify the keyboard's battery level; low battery can disable lighting.
G-keys or macros not working	Ensure Logitech G HUB software is installed and running. Verify that the correct profile is active in G HUB. Check the macro assignments in G HUB for accuracy.

SPECIFICATIONS

Feature	Detail
Model Number	920-012670
Connectivity	LIGHTSPEED Wireless (2.4 GHz RF), Bluetooth, Wired USB-C
Switch Type	GL Tactile Mechanical Switches (Low-Profile)
Actuation Point	1.3 mm
Total Travel Distance	3.2 mm
Keycaps	Double-Shot PBT
Lighting	LIGHTSYNC RGB (Per-key customizable)
Programmable Keys	5 dedicated G-keys, up to 15 functions per key via KEYCONTROL
Battery Life	Up to 36 hours (with lighting)
Charging Time	Approx. 4 hours
Dimensions (LxWxH)	18.7 x 5.91 x 0.87 inches (47.5 x 15 x 2.2 cm)
Weight	2.38 pounds (1.08 kg)
Material	Aluminum top plate
Operating System Compatibility	PC, Mac OS






WARRANTY AND SUPPORT

Logitech products are designed for durability and performance. For information regarding warranty coverage, technical support, and frequently asked questions, please visit the official Logitech support website.

Logitech Support Website: <https://support.logi.com/>

For additional protection, consider purchasing an extended protection plan available at the time of purchase.

Related Documents - 920-012670

	<p>Logitech MX Mechanical Mini: Getting Started Guide</p> <p>A concise guide to setting up and using the Logitech MX Mechanical Mini keyboard, covering connection methods, software, smart backlighting, and Logitech Flow.</p>
	<p>Logitech G915 TKL LIGHTSPEED Wireless RGB Mechanical Gaming Keyboard User Manual</p> <p>Explore the features and setup guide for the Logitech G915 TKL LIGHTSPEED Wireless RGB Mechanical Gaming Keyboard. Learn about its wireless connectivity, lighting functions, media controls, and more.</p>
	<p>Logitech G915 Wireless RGB Mechanical Gaming Keyboard User Guide</p> <p>This guide provides information on the Logitech G915 Wireless RGB Mechanical Gaming Keyboard, including setup, features, lighting functions, G-keys, media controls, battery indicator, and wireless connectivity.</p>
	<p>Logitech MX Mechanical Mini Getting Started Guide</p> <p>A comprehensive guide to setting up and using the Logitech MX Mechanical Mini keyboard, including connection options, software installation, backlighting features, and multi-device functionality.</p>
	<p>Logitech G915 X LS Tactile BL: Setup and User Guide</p> <p>Comprehensive setup and user guide for the Logitech G915 X LS Tactile BL wireless gaming keyboard, detailing connection, features, and customization options.</p>



[Logitech G915 X LS Tactile WH Setup Guide and User Manual](#)

Comprehensive setup guide and user manual for the Logitech G915 X LS Tactile WH wireless gaming keyboard, detailing connection, features, customization, and care.