




## dewenwils HRL 11C Wireless Remote Control Socket Instruction Manual

[Home](#) » [dewenwils](#) » dewenwils HRL 11C Wireless Remote Control Socket Instruction Manual 

# ***dewenwils***

Wireless Remote Control Socket  
Instruction Manual

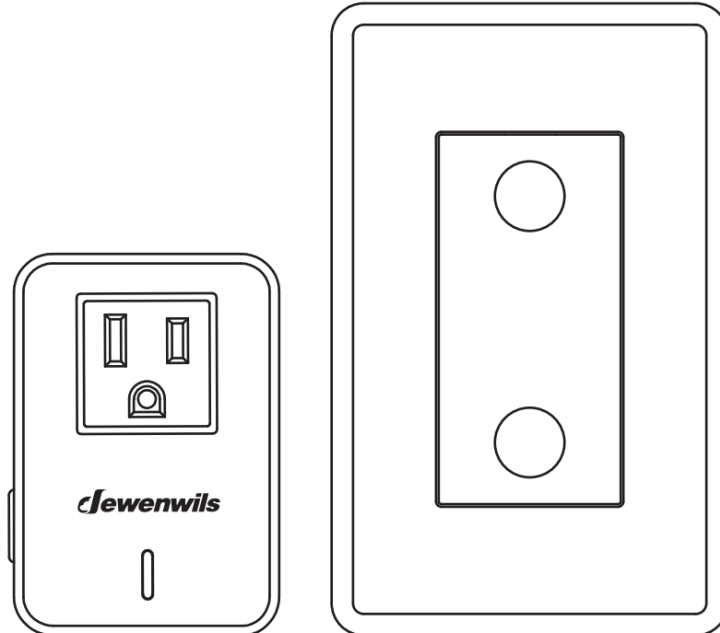

## Contents

- [1 HRL 11C Wireless Remote Control Socket](#)
- [2 Operating Instructions](#)
- [3 Mounting the Wall Switch](#)
- [4 Troubleshooting](#)
- [5 Specifications:](#)
- [6 Safety Information](#)
- [7 Documents / Resources](#)
- [8 Related Posts](#)

## HRL 11C Wireless Remote Control Socket


Thank you for your purchase. Please contact us if you have any questions. We will get back to you within 24 hours. Please attach your Order ID so that we can serve you better.

### Warning:

To reduce the risk of fire, electric shock, or personal injury, please strictly follow the instructions.

1. For indoor use only. Avoid high humidity, high temperature, and high magnetic field.
2. Do not connect any devices that may exceed the performance limits of the outlet.
3. Do not insert needles or any other metal objects into main outlets.
4. Do not disassemble or repair the product, but only by authorized service personnel.
5. Children are not allowed to use remote outlets without adult supervision.
6. To prevent children from suffocation and choking, keep them away from packing materials.
7. Do not use the battery again if it is dropped or knocked out of shape.
8. Used batteries should be disposed of safely and in accordance with environmental protection standards.

## Product Illustration

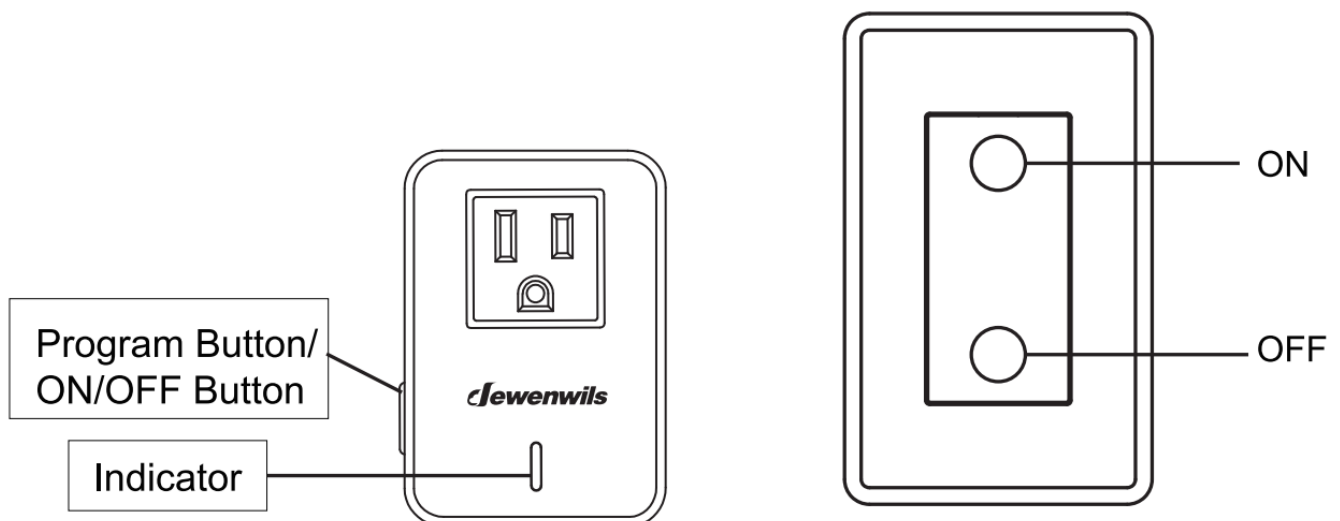

## Operating Instructions

1. Plug the receiver into a powered outlet.
2. Remove the isolation tab in the battery compartment of the transmitter.
3. Press each ON/OFF button on the transmitter will turn on or off the corresponding receiver accordingly.

Note:

1. The program button of each receiver can also be used as a manual switch.
2. The receiver will remain “OFF” after a power cut to save energy.

### Canceling Programming

To remove a receiver from all transmitter pairings (no remote transmitter can control it):

1. Unplug the connected device from the receiver
2. Unplug the receiver from the powered outlet
3. Press and hold the program button on the receiver
4. Plug the receiver back to the powered outlet while continuing to press the program button for approximately 5 seconds until the indicator begins to flash.
5. Program reset is successful when the indicator on the receiver flashes several times and stops blinking.

### Programming the Receiver


The receivers and transmitter have been pre-paired for immediate use, but there are a few units that may not be pre-programmed or programmed incorrectly, or you want to customize the configuration to meet your needs. To program a transmitter and receiver, please follow the steps below:

1. Cancel the programming referring to the above ‘Cancelling Programming’ section first.
2. Press the program button on the receiver for 6 seconds until the indicator light starts to flash slowly.
3. Release the program button and then press the “on” or “off” button on the remote control.
4. Programming/pairing is successful when the indicator light stops blinking.

**Note:** Each set of ON or OFF buttons can be paired with and control several outlets;  
Each outlet can be paired with and controlled by multiple transmitters.


### Mounting the Wall Switch

Shown as in the figure

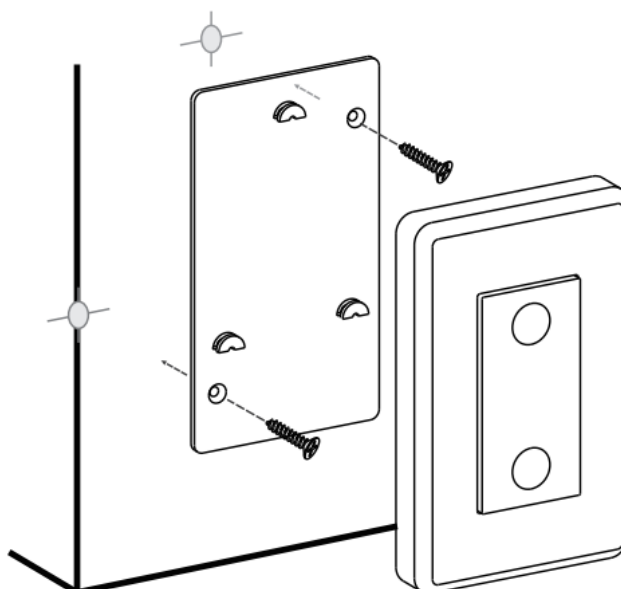

## Battery Replacement:

1. If you find the receivers work abnormally or the indicator on the transmitter becomes dim, please replace the remote battery with a new DC 12V (type 23A) battery, making sure the polarity + / – of the battery is correct.
2. Low battery power may decrease readable wireless remote range.
3. Remove batteries if the remote is not in use for an extended period of time.

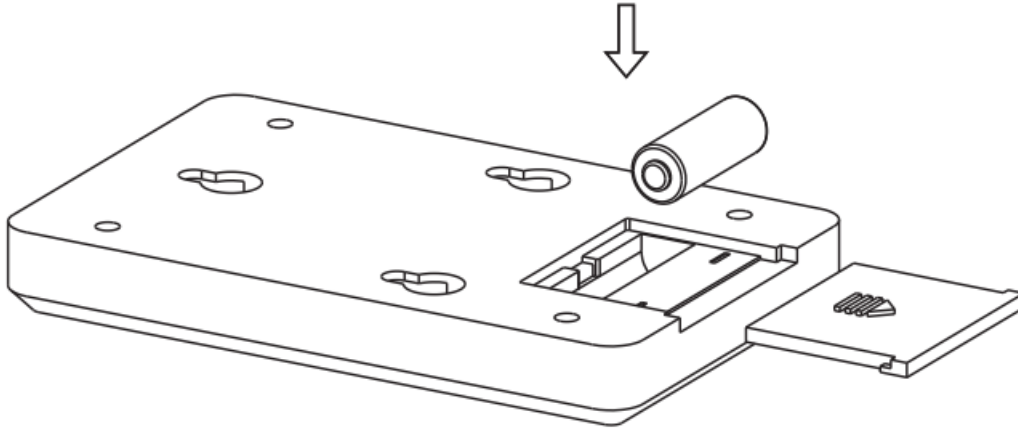

## Troubleshooting

In the case that one receiver is unresponsive to the remote control, please follow the steps below to resolve the issue:

1. If the wire switch receiver is unresponsive to the remote control, please refer to the “Canceling Programming” and “Programming the Receiver” sections in the manual to reprogram the receiver.
2. Make sure the receiver and appliance are properly connected and powered on.
3. Replace the remote battery with a new 12V (23A) battery.
4. The remote transmitter may be too far away to control the receiver.
5. Make sure not to exceed the maximum load.

## Specifications:

- Input Voltage: 120VAC, 60Hz
- Max Power Rating: 10A, 1200W
- Transmission Frequency: 433.92MHz
- Remote Control Range: 100Feet (Free Area)
- Remote Battery: 23A, 12V

## Safety Information

Federal Communications Commission Interference Statement. This equipment has been tested and found to comply with the limits for Class B digital devices, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Redirect or relocate the receiving antenna.
- Increase the distance between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. this device may not cause interference, and
2. this device must accept any interference, including interference that may cause undesired operation of the device.

**FCC Caution:** Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

#### **One Year Limited Warranty**

DEWENWILS warrants this product to be free from defects in material and workmanship for a period of one year from the date of purchase.

The warranty is void if the damage is caused by misuse or improper installation. Our dedicated customer service team will get back to you within 24 hours.



## **Documents / Resources**

|                                                                                     |                                                                                                                                                                                                      |
|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <p><a href="#">dewenwils HRL 11C Wireless Remote Control Socket</a> [pdf] Instruction Manual<br/>HRL 11C, Wireless Remote Control Socket, Remote Control Socket, Control Socket, HRL 11C, Socket</p> |
|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|