Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

LHZHENG TWHLQ-12P

LHZHENG TWHLQ-12P Emergency Rechargeable LED Light Bulb Instruction Manual

Model: TWHLQ-12P

Introduction

Thank you for choosing the LHZHENG TWHLQ-12P Emergency Rechargeable LED Light Bulb. This innovative bulb functions as a standard LED light and automatically provides illumination during power outages. It is designed for versatility, offering multiple activation methods and adjustable brightness, making it ideal for home, camping, and emergency preparedness.



Image: Comparison of LHZHENG Emergency Bulb (lights up) and a Regular Bulb (dark) during a power failure.

Setup

Charging the Bulb

The LHZHENG Emergency Rechargeable LED Light Bulb contains a built-in battery that charges automatically when the bulb is installed in a powered light fixture. For optimal performance, ensure the bulb is fully charged before its first emergency use.

- **Standard Installation:** Screw the bulb into any standard E27/E26 light socket. Ensure the light switch is in the 'ON' position. The bulb will illuminate and simultaneously charge its internal battery.
- **Initial Charge:** Allow 6-8 hours for a full initial charge.



Image: A LHZHENG Emergency Bulb screwed into a standard table lamp, illustrating the charging process when connected to power.

Operating Instructions

Emergency Mode Activation

When installed in a powered fixture and the power source is cut off (e.g., during a power outage), the bulb will automatically switch to emergency mode and illuminate, provided the light switch is in the 'ON' position.

Your browser does not support the video tag.

Video: Demonstrates the LHZHENG Emergency Bulb automatically lighting up when the main power switch is turned off, simulating a power failure.

Manual Activation (without power)

The bulb can be manually activated even when not in a powered socket, making it portable for various uses:

1. **Using the Hook:** Screw the provided hook into the bulb's base. Press the button on the hook to turn the light on/off and cycle through brightness levels.
2. **Hand Touch:** Hold the bulb by the plastic body. Place two fingers on the side of the screw base and touch the bottom contact with a third finger to complete the circuit and turn the bulb on.
3. **Wet Tissue:** Place a damp tissue or cloth across the screw base contacts to complete the circuit and turn the bulb on.
4. **Plug Cap Adapter:** Insert the bulb into the provided Magic Plug Cap Adapter. This allows the bulb to be turned on/off and hung like a portable lamp.

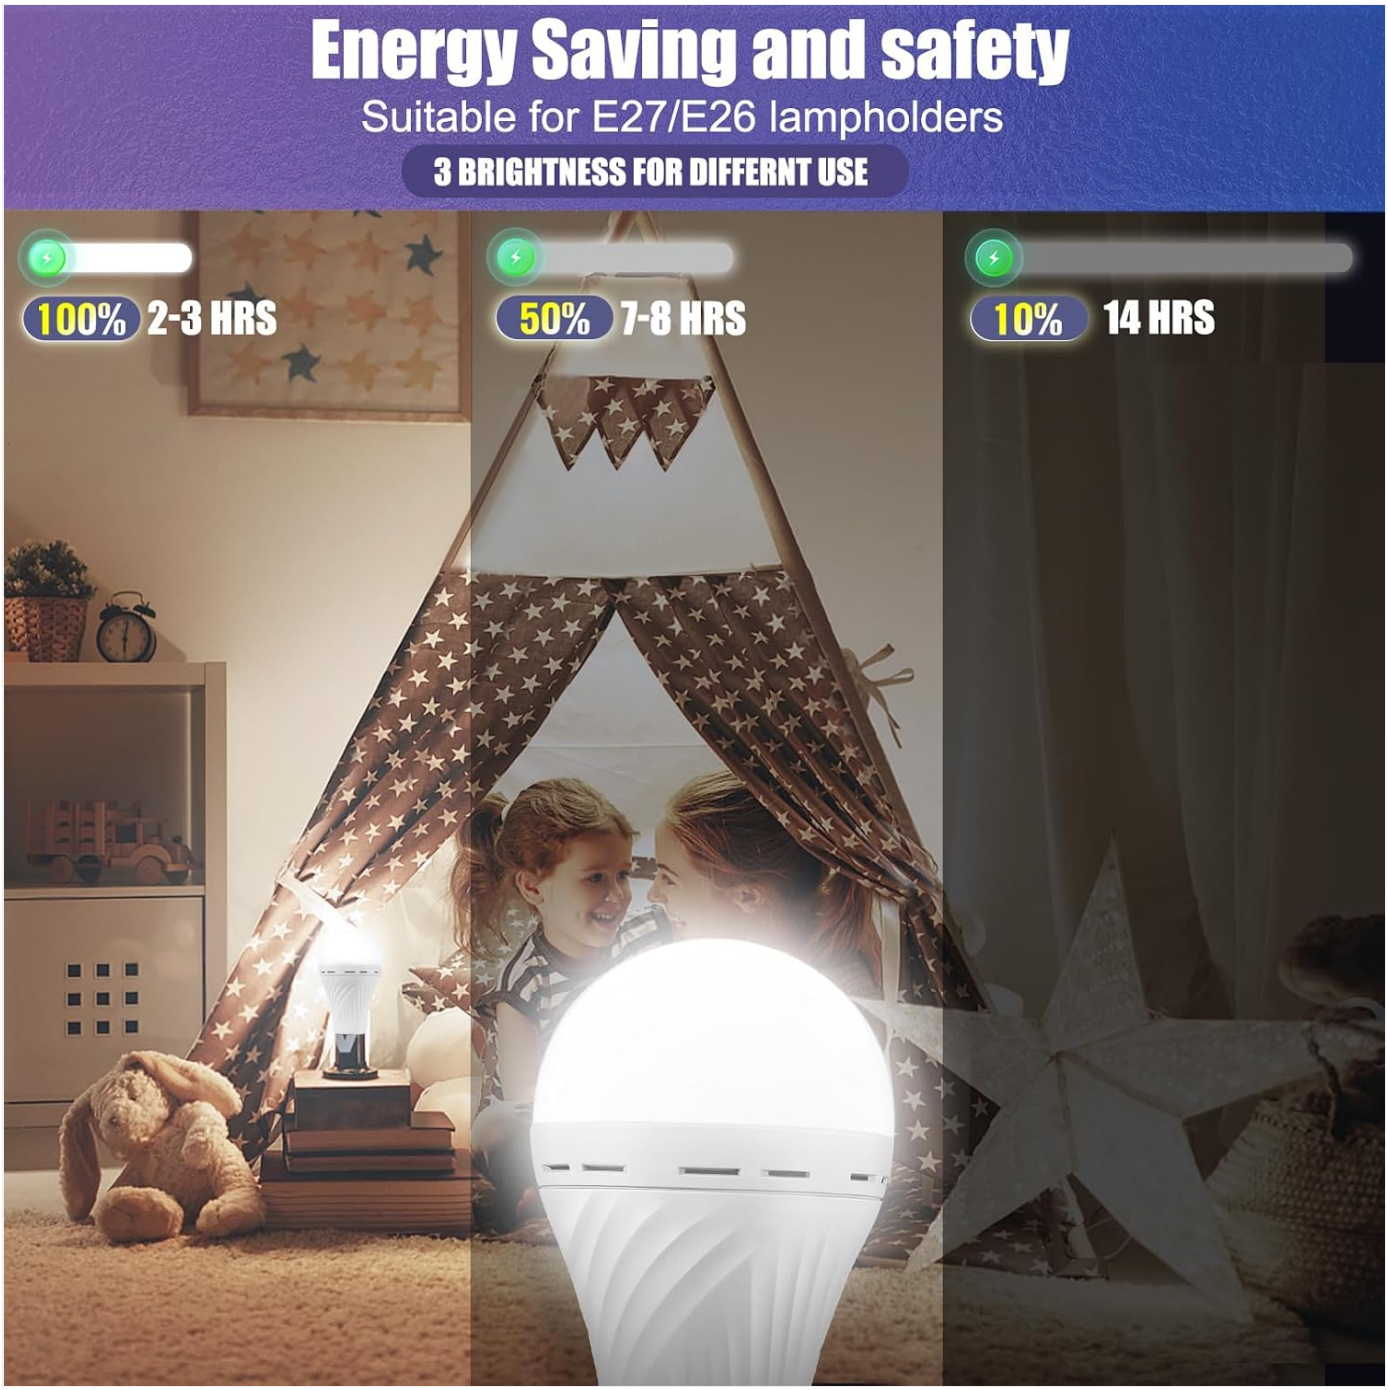


Image: Illustrates three manual activation methods: screwing into a hook, touching the base with fingers, and using a wet tissue on the base.

Your browser does not support the video tag.

Video: Shows a user demonstrating various ways to activate the LHZHENG Emergency Bulb, including using the hook, touching the base, and using a plug cap.

Your browser does not support the video tag.

Video: A user demonstrates activating the rechargeable light bulb by touching the base with fingers and using a wet tissue.

Brightness Adjustment

The LHZHENG rechargeable battery bulb offers 3 brightness levels in battery mode, adjustable via the button on the hook or the light switch during a power failure:

- **100% Brightness:** Provides 2-3 hours of illumination. Ideal for living rooms or areas requiring maximum light.
- **50% Brightness:** Provides 7-8 hours of illumination. Suitable for bathrooms or moderate lighting needs.
- **10% Brightness:** Provides 14+ hours of illumination. Perfect for bedrooms or as a night light.



Image: Shows the bulb's adjustable brightness settings (10%, 50%, 100%) suitable for different environments like night light, living room, and camping.

Maintenance

To ensure the longevity and optimal performance of your LHZHENG Emergency Rechargeable LED Light Bulb, follow these simple maintenance guidelines:

- **Regular Charging:** Keep the bulbs installed in powered fixtures to ensure their internal batteries remain charged and ready for emergency use.
- **Cleaning:** Wipe the bulb's exterior with a soft, dry cloth. Avoid using harsh chemicals or abrasive materials.
- **Storage:** If storing bulbs for an extended period, ensure they are fully charged. Recharge them periodically (e.g., every 3-6 months) to maintain battery health. Store in a cool, dry place.
- **Avoid Water Immersion:** These bulbs are not waterproof. Avoid direct exposure to water or high humidity.

Troubleshooting

If you encounter any issues with your LHZHENG Emergency Rechargeable LED Light Bulb, please refer to the following common solutions:

- **Bulb not lighting up in emergency mode:**
  - Ensure the bulb was installed in a powered fixture with the switch 'ON' to allow for charging.
  - Verify the light switch was in the 'ON' position when the power outage occurred.
  - Allow the bulb to charge for 6-8 hours in a powered fixture.
- **Bulb not lighting up when manually activated (fingers/wet tissue):**
  - Ensure your fingers or the wet tissue make firm contact with both the side screw base and the bottom contact point simultaneously.
  - Confirm the bulb has sufficient charge.
- **Plug Cap Adapter confusion:**
  - The plug cap adapter is designed to provide a portable power source for the bulb when not in a fixture. Simply screw the bulb into the adapter, and it will function as a handheld or hanging light. It does not require external power to operate the bulb once the bulb itself is charged.
- **Short battery life:**
  - Ensure the bulb is fully charged (6-8 hours).
  - Adjust the brightness level. Lower brightness settings (10% or 50%) provide significantly longer illumination times.

Specifications

Feature	Specification
Brand	LHZHENG
Model Name	TWHLQ-12P
Light Type	Backup, LED
Wattage	12 Watts
Incandescent Equivalent	60 Watts
Brightness	800 Lumens
Color Temperature	6500 Kelvin (Cool White)
Bulb Base	E27 (compatible with E26)

Bulb Shape Size	A19
Battery Capacity	1500mAh
Emergency Illumination Duration	2-3 hours (100% brightness), 7-8 hours (50% brightness), 14+ hours (10% brightness)
Voltage	120 Volts (Accepted: 100-240 Volts)
Frequency	50-60 Hertz
Average Life	30,000 Hours
Material	Plastic
Control Method	Push Button
Included Components	2 x LZHENG Battery Operated Light Bulb, 2 x LHZHENG Magic Power Cap with Hook, 1 x LHZHENG Magic Plug Cap Adapter, 1 x Manual

Warranty and Support

LHZHENG is dedicated to providing high-quality products and superior service. If you are dissatisfied with your product for any reason, please contact us for a new one or a 100% money-back guarantee.
For further assistance or inquiries, please visit the official LHZHENG Store: LHZHENG Store on Amazon

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0DBLMNXM4

More documents and user manuals: **https://manuals.plus/**