

[Manuals.plus](#) /

› [YiLaie](#) /

› YiLaie EL-HSY-02 LED Wireless Wall Sconce User Manual

YiLaie EL-HSY-02

YiLaie EL-HSY-02 LED Wireless Wall Sconce User Manual

Model: EL-HSY-02

INTRODUCTION

This manual provides comprehensive instructions for the YiLaie EL-HSY-02 LED Wireless Wall Sconce. This product features a 4000mAh rechargeable battery, 360-degree rotation, and touch-controlled brightness adjustment. It is designed for various indoor applications, including bedrooms, living rooms, and reading areas. Please read this manual carefully before installation and use to ensure proper function and longevity of your device.

PACKAGE CONTENTS

Verify that all components are present in the package:

- 1 x LED Wall Sconce
- 1 x Magnetic Swivel Base
- 2 x Expansion Screws
- 1 x Metal Disc (for adhesive mounting)
- 1 x Adhesive Pad
- 1 x Type-C Charging Cable

packaging includes



Figure 1: Package Contents. This image displays all items included in the YiLaie EL-HSY-02 LED Wireless Wall Sconce package: the main light unit, a magnetic spherical base, two expansion screws, a metal disc, an adhesive pad, and a USB Type-C charging cable.

SETUP AND INSTALLATION

The YiLaie EL-HSY-02 offers flexible installation options to suit various wall types.

Method 1: Adhesive Mounting (for smooth and flat walls)

1. Clean the desired wall surface thoroughly to ensure it is dry and free of dust or grease.
2. Peel off the protective film from one side of the adhesive pad and attach it firmly to the back of the metal disc.
3. Peel off the remaining protective film from the adhesive pad and press the metal disc firmly onto the cleaned wall surface. Hold for 30 seconds.
4. Allow the adhesive to set for at least 24 hours before attaching the lamp.
5. Once the adhesive is secure, the magnetic swivel base can be attached to the metal disc, and the lamp can then be magnetically attached to the swivel base.

Method 2: Screw Mounting (for rough walls or permanent fixture)

1. Choose the desired location on the wall.
2. Mark the positions for the two expansion screws using the magnetic swivel base as a template.
3. Drill pilot holes at the marked positions.
4. Insert the expansion screws into the pilot holes.
5. Secure the magnetic swivel base to the wall using the screws.
6. Attach the lamp magnetically to the swivel base.

The lamp unit can be easily detached from its magnetic base for charging or use as a portable light. The magnetic connection also allows for 360-degree rotation to direct light as needed.



Figure 2: Mounting Options and 360° Adjustment. This image illustrates the 360-degree free rotation capability of the lamp and two mounting methods: one for smooth, flat walls using an adhesive disc, and another for rough walls using screws.

OPERATING INSTRUCTIONS

Charging the Battery

The wall sconce is equipped with a 4000mAh rechargeable battery.

- Connect the provided Type-C charging cable to the charging port on the lamp.
- Connect the other end of the cable to a standard USB power adapter (not included).
- A full charge takes approximately 5-6 hours.
- The lamp can operate for up to 30 hours at the lowest brightness setting and up to 7 hours at the highest brightness setting on a full charge.



Figure 3: Battery Charging. This image illustrates the internal 4000mAh battery being charged via a Type-C USB cable, highlighting the battery capacity, charging time, and lighting duration.

Power On/Off and Brightness Adjustment

The lamp features a sensitive touch control for easy operation.

- **Single Press:** Tap the touch button (marked with a power icon) to turn the lamp On or Off.

- **Long Press:** Press and hold the touch button to activate stepless dimming. The brightness will smoothly adjust from 10% to 100%. Release the button at your desired brightness level.
- **Memory Function:** The lamp will remember your last brightness setting and restore it when turned on again.

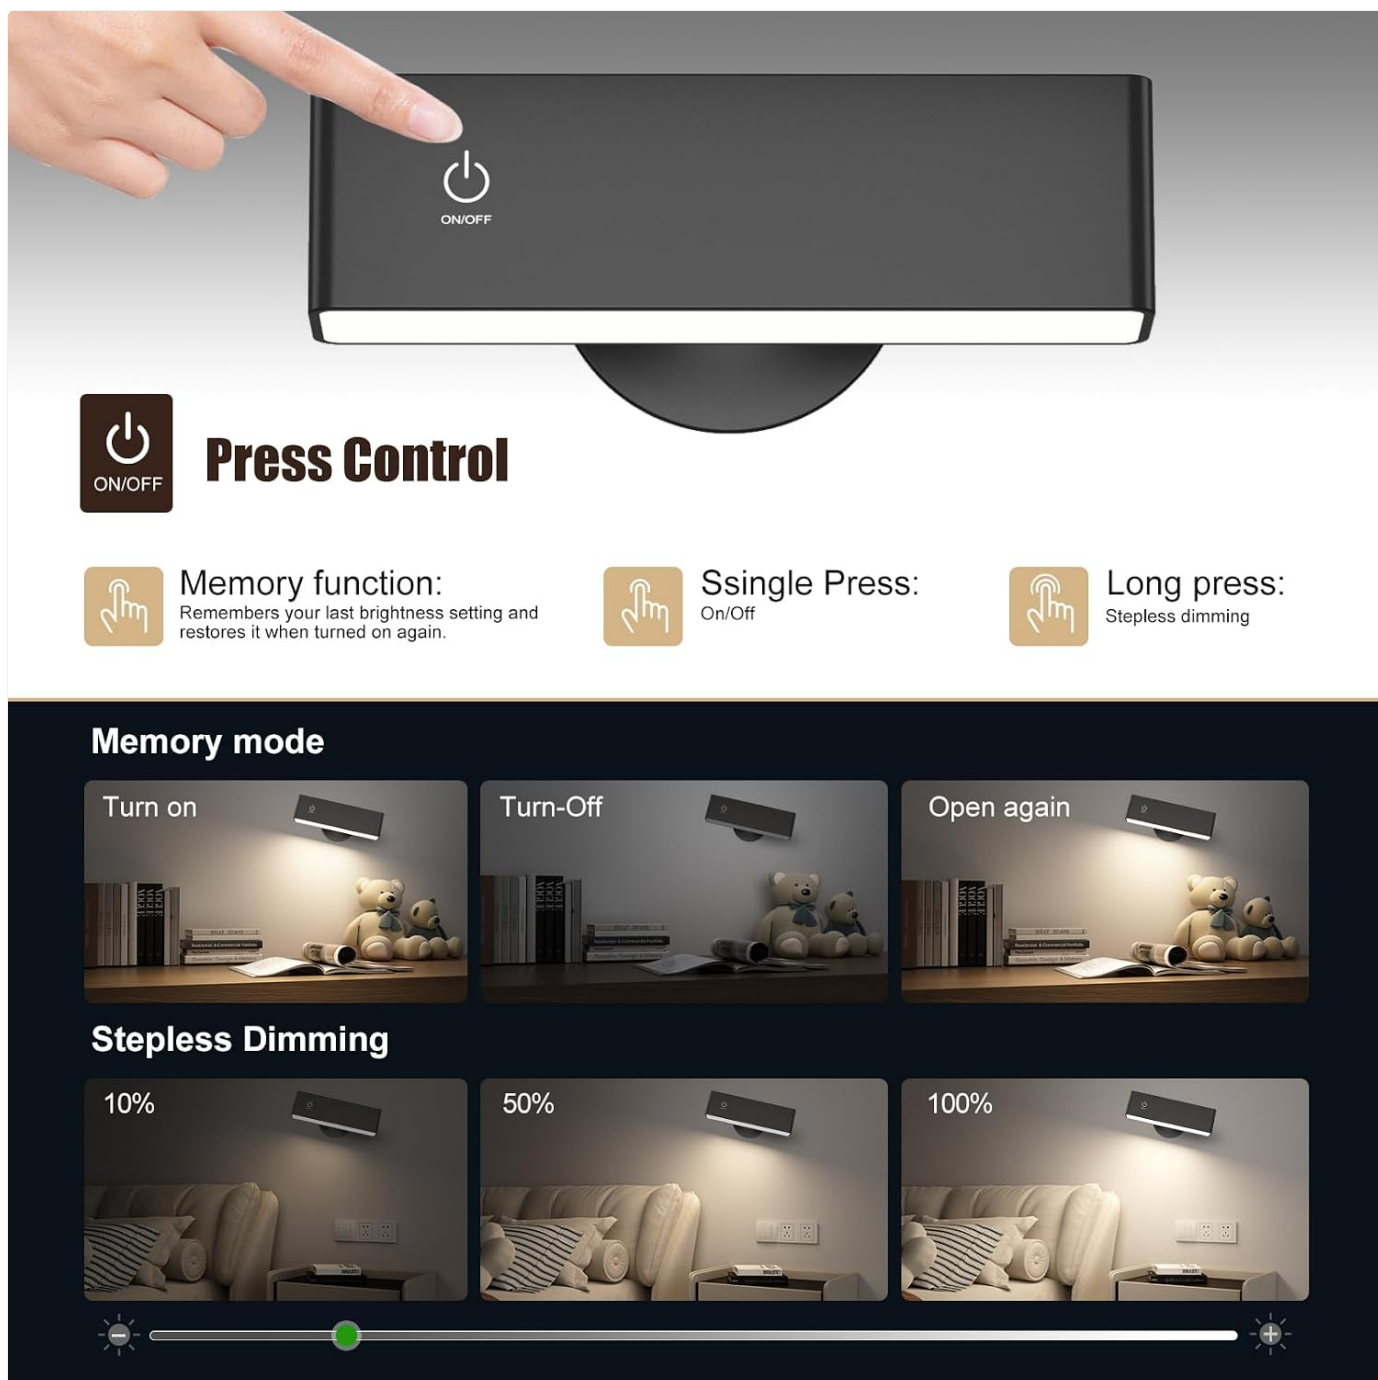


Figure 4: Touch Control and Dimming. This image details the touch control functions: a single press for power on/off, a long press for stepless dimming (10% to 100%), and the memory function that recalls the last brightness setting.

360° Rotation and Portability

The lamp's magnetic design allows for 360-degree free rotation on its base, enabling you to direct the light precisely where needed. It can also be easily detached from the base and used as a portable light source, such as a bedside lamp, emergency light, or flashlight.



Figure 5: Versatile Usage. This image demonstrates the lamp's versatility in different settings, such as a bedside reading light, accent lighting on a staircase, or task lighting above a desk.

MAINTENANCE

- **Cleaning:** Use a soft, dry cloth to wipe the surface of the lamp. Do not use abrasive cleaners or solvents.
- **Battery Care:** To prolong battery life, avoid fully discharging the battery frequently. Charge the lamp regularly, even if not in constant use.
- **Storage:** If storing the lamp for an extended period, charge it to about 50% and store in a cool, dry place. Recharge every 3-6 months.

TROUBLESHOOTING

Problem	Possible Cause	Solution
---------	----------------	----------

Problem	Possible Cause	Solution
Lamp does not turn on.	Battery is depleted.	Charge the lamp using the provided Type-C cable.
Brightness adjustment is not working.	Incorrect operation.	Ensure you are performing a long press on the touch button for stepless dimming.
Lamp falls off the wall.	Adhesive not properly applied or wall surface unsuitable.	Re-apply adhesive to a clean, smooth surface, or use screw mounting for rougher walls. Ensure adhesive cures for 24 hours.
Short battery life.	Operating at high brightness continuously; battery degradation.	Reduce brightness for longer use. Ensure full charge. If issues persist after 1 year, battery may be degrading.

SPECIFICATIONS

Model Number	EL-HSY-02
Dimensions (L x W x H)	15 cm x 4.3 cm x 3.2 cm (5.9 in x 1.7 in x 1.2 in)
Weight	555 grams (1.22 lbs)
Battery Capacity	4000 mAh
Charging Port	USB Type-C
Charging Time	Approx. 5-6 hours
Lighting Duration	7-30 hours (depending on brightness)
Light Source Type	LED (50 beads)
Color Temperature	4000 Kelvin (Natural White)
Luminous Flux	450 Lumens (Max)
Power	2 Watts
Voltage	5 Volts
Control Method	Touch Control (Stepless Dimming)
Mounting Type	Wall Mount (Adhesive or Screw)
Material	Plastic
Indoor/Outdoor Use	Indoor Use Only

WARRANTY AND SUPPORT

YiLaie provides a **1-year warranty** for this product. If you encounter any issues or have questions regarding your EL-HSY-02 LED Wireless Wall Sconce, please contact our online after-sales support team. We are committed to providing 100% satisfactory service.

For support, please refer to the contact information provided with your purchase or visit the official YiLaie website.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question