

ORIA OUS-HY-WA145B&CKM

ORIA Digital Alarm Clock (Model OUS-HY-WA145B&CKM) User Manual

1. PRODUCT OVERVIEW

The ORIA Digital Alarm Clock features a large LED display, dual alarms, adjustable brightness and volume, and a snooze function. It is designed for use in bedrooms, living rooms, and during travel. This manual provides instructions for setup, operation, and maintenance.



Image: The ORIA Digital Alarm Clock displaying time with colorful digits, illustrating its large LED display and adjustable brightness levels.

2. SETUP GUIDE

2.1 Power Supply

The alarm clock supports two power supply methods: USB Type-C cable for continuous power and 3*AAA batteries for data backup and power-saving mode. An adapter is not included.

- **USB Type-C Cable (Main Power):** Connect the provided Type-C cable to the clock and a USB power adapter (not included). The display will remain on continuously.
- **3*AAA Batteries (Backup Power):** Insert 3*AAA batteries (not included) into the battery compartment. In battery-only mode, the display will turn off after 10 seconds of no operation to conserve power. The colon between the clock minutes will not flash.

Your browser does not support the video tag.

Video: Demonstrates the two power modes: battery-powered (display turns off after 10 seconds) and USB-C cable powered (display stays on). This video is titled "ORIA Digital Alarm Clock-Product Details" and is provided by the seller.

2.2 Initial Time and Date Setting

To set the time and date:

1. Press and hold the **TIME SET (12/24h)** button for 3 seconds until the YEAR starts flashing. You are now in the basic settings.
2. Use the **+** or **-** buttons to adjust the YEAR.
3. Press the **TIME SET (12/24h)** button to confirm and jump to the next setting (MONTH).
4. Repeat steps 2 and 3 to set the MONTH, DAY, HOUR, and MINUTE.
5. After setting the MINUTE, press **TIME SET (12/24h)** again to save all settings and exit.

Note: All settings can be skipped or ceased if no button is pressed for 20 seconds. The setting process cannot be interrupted; otherwise, you may need to repeat the process.

Your browser does not support the video tag.

Video: A step-by-step guide on how to set the time and alarm on the ORIA Digital Alarm Clock. This video is titled "How to set the time and alarm?" and is provided by the seller.

3. OPERATING INSTRUCTIONS

3.1 Time Display and Format

The clock supports both 12-hour and 24-hour time formats. To switch between formats, briefly press the **TIME SET (12/24h)** button when not in setting mode.

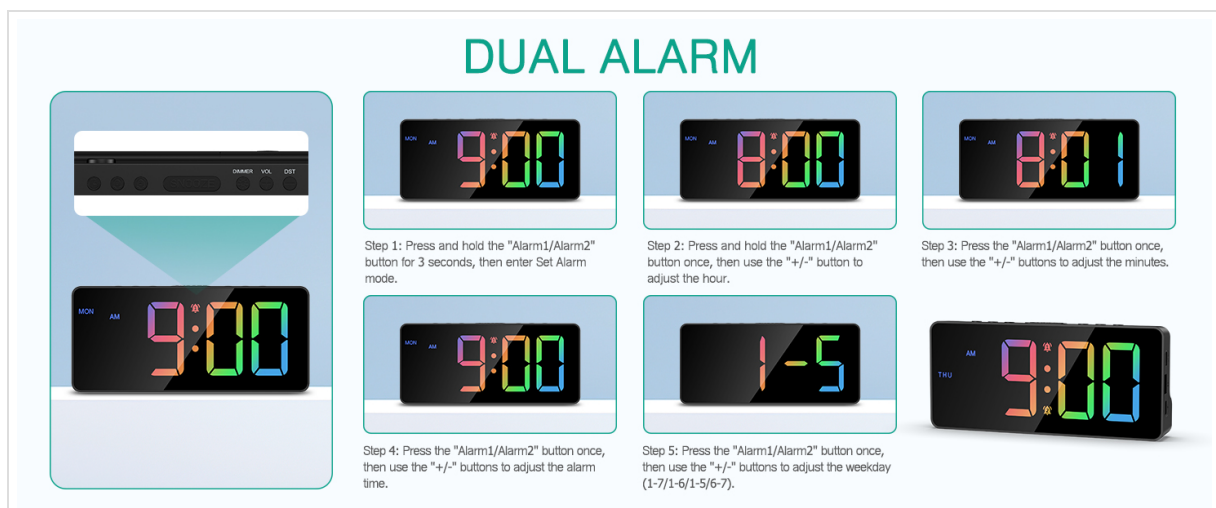


Image: The alarm clock displaying time in both 12-hour (10:00 AM) and 24-hour (22:00) formats, illustrating the format switching capability.

3.2 Alarm Setting

The clock features dual alarms (Alarm 1 and Alarm 2) with four alarm modes: Monday-Friday (1-5), Monday-Saturday (1-6), Monday-Sunday (1-7), and Saturday-Sunday (6-7).

To set Alarm 1:

1. Press and hold the **Alarm 1** button for 3 seconds. The hour indicator and alarm symbol will flash.
2. Use the **+** or **-** buttons to set the desired hour for Alarm 1.
3. Press the **Alarm 1** button to store the hour setting. The minute indicator and alarm symbol will flash.
4. Use the **+** or **-** buttons to set the desired minute for Alarm 1.
5. Press the **Alarm 1** button to store the minute setting. The day of the week (MON-FRI) will flash.
6. Use the **+** or **-** buttons to select the desired alarm mode (1-5, 1-6, 1-7, 6-7).
7. Press the **Alarm 1** button to store the setting. Alarm 1 is now set.

To set Alarm 2, follow the same steps using the **Alarm 2** button.



Image: Demonstrates the dual alarm feature, showing two different wake-up times for different individuals.

3.3 Snooze Function

When an alarm sounds, press the large **SNOOZE** button on top of the clock to temporarily silence the alarm. The default snooze time is 9 minutes. The alarm will sound again after the snooze period.



Image: Highlights the easy-to-access snooze button and indicates the 3-level volume adjustment.

3.4 Brightness Adjustment

The clock offers 5 levels of brightness (Off, Ultra low, Low, Medium, High) and an auto-night brightness mode.

- **Manual Brightness:** Briefly press the **DIMMER** button to cycle through the 5 brightness levels.
- **Auto-Night Brightness:** Hold and press the **DIMMER** button for 3 seconds. A moon symbol will appear on the display, indicating that Auto-Night mode is activated. The brightness will automatically dim during PM7:00 to AM7:00. This mode is off by default.



Image: Illustrates the 5-level brightness settings and the auto-night dimming feature for comfortable viewing day and night.

3.5 Volume Adjustment

The alarm sound has 3 adjustable volume levels (50dB, 70dB, 90dB).

- To adjust the alarm volume, press the **VOL +** button to choose the desired sound level.

Your browser does not support the video tag.

Video: Part of the "ORIA Digital Alarm Clock-Product Details" video, specifically demonstrating how to set the alarm sound volume (50dB - 90dB).

3.6 Daylight Saving Time (DST)

The clock requires manual setting for Daylight Saving Time.

- Press the **DST** button to activate or deactivate DST during the DST period.
- When the DST symbol appears, the clock is set forward 1 hour.
- When the DST symbol disappears, the clock is set backward 1 hour.

Note: Please check and refer to your country's winter/summer time before setting DST.

Your browser does not support the video tag.

Video: Part of the "ORIA Digital Alarm Clock-Product Details" video, specifically demonstrating how to set the Daylight Saving Time (DST).

4. MAINTENANCE

To ensure the longevity and proper functioning of your ORIA Digital Alarm Clock, follow these simple maintenance guidelines:

- Clean the clock's surface with a soft, dry cloth. Avoid using abrasive cleaners or solvents.
- Keep the clock away from direct sunlight, extreme temperatures, and high humidity.
- If using batteries, replace them promptly when the low battery indicator appears to prevent data loss.

5. TROUBLESHOOTING

- **Display not staying on:** If the display turns off after 10 seconds, the clock is likely running on battery power. For continuous display, connect the clock using the USB Type-C cable.
- **Low Battery Indicator:** If the batteries run too low to power the LED alarm clock, a battery level

indicator will appear on the display. Replace the batteries as soon as possible to maintain settings.

- **Alarm not sounding:** Ensure the alarm is activated and the volume is set to an audible level. Check that the alarm time and day-of-week mode are correctly configured.
- **Incorrect time/date:** Re-enter the time and date settings as described in Section 2.2. Ensure all steps are completed without interruption.

Your browser does not support the video tag.

Video: Part of the "ORIA Digital Alarm Clock-Product Details" video, showing the low battery indicator on the display and advising battery replacement.

6. SPECIFICATIONS

Brand	ORIA
Model Number	OUS-HY-WA145B&CKM
Color	Colorful
Display Type	LED
Special Features	Adjustable Brightness, Adjustable Volume, Dual Alarms, Large Display, Snooze
Product Dimensions	2.9"W x 6.6"H
Power Source	Corded Electric (USB Type-C), Battery (3*AAA for backup)
Room Type	Bedroom, Home Office, Living Room, Study Room
Mounting Type	Tabletop
Frame Material	Acrylonitrile Butadiene Styrene

7. WARRANTY AND SUPPORT

ORIA is committed to providing high-quality products and customer satisfaction. This product comes with the following support:

- **1-Year Warranty:** Covers manufacturing defects and malfunctions under normal use.
- **90-Day Free Replacements:** For eligible product issues within 90 days of purchase.
- **30-Day Free Returns:** Hassle-free returns within 30 days of purchase.
- **24/7 Customer Support:** Assistance available around the clock for any queries or issues.
- **Lifetime Technical Support:** Ongoing technical assistance for the lifespan of the product.

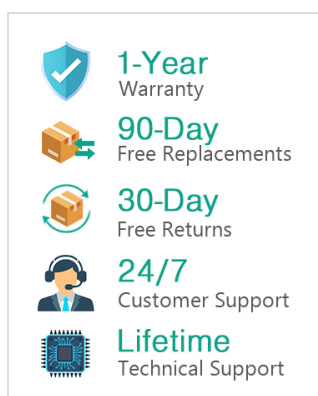


Image: Visual representation of the comprehensive warranty and support services offered by ORIA.