

DIGILOG ELECTRONICS ESP32-CAM Module User Manual

[Home](#) » [Digilog Electronics](#) » DIGILOG ELECTRONICS ESP32-CAM Module User Manual 

Contents

- [1 DIGILOG ELECTRONICS ESP32-CAM Module](#)
- [2 Features](#)
- [3 An overview of the](#)
- [4 Product technical specifications](#)
- [5 Pin definition](#)
- [6 Minimum system diagram](#)
- [7 FCC STATEMENT](#)
- [8 Requirement per KDB996369 D03](#)
 - [8.1 Trace antenna designs](#)
 - [8.2 RF exposure considerations](#)
 - [8.3 Antennas](#)
 - [8.4 Label and compliance information](#)
 - [8.5 Additional testing, Part 15 Subpart B disclaimer](#)
- [9 Documents / Resources](#)
- [10 Related Posts](#)

Digilog

DIGILOG ELECTRONICS ESP32-CAM Module



Features

- Ultra-compact 802.11b/ G/N Wi-Fi + BT/ BLE SoC The module
- Low power consumption dual-core 32-bit CPU, can be used as an application processor
- Main frequency up to 240MHz, computing capacity up to 600 DMIPS
- Built-in 520 KB SRAM, external 4M PSRAM
- Supports UART/SPI/I2C/PWM/ADC/DAC interfaces
- Supports OV2640 and OV7670 cameras with built-in flash
- Support WiFi uploading of pictures
- Supports TF cards
- Supports multiple hibernation modes.
- Embedded Lwip and FreeRTOS
- Supports STA/AP/STA+AP working modes
- Smart Config/AirKiss one-click network configuration is supported
- Support serial port local upgrade and remote firmware upgrade (FOTA)

An overview of the

- The esp32-cam has the industry's most competitive small camera module. The module can work independently as the smallest system, measuring only 27*40.5*4.5mm and having a minimum deep sleep current of 6mA.
- Esp-32cam is an ideal solution for a wide range of IoT applications, including home smart devices, industrial wireless control, wireless monitoring, QR wireless identification, wireless positioning system signals and other iot applications.
- Esp-32cam adopts a DIP package and can be directly inserted into the base plate to realize rapid production and provide customers with high reliability connection mode, which is convenient for application in various iot hardware terminal applications.

Product technical specifications

module type	ESP32-CAM
encapsulation	DIP-16
size	27*40.5*4.5 ±0.2 mm
SPI Flash	32Mbit
RAM	Internal 520KB+ external 4M PSRAM
Bluetooth	Bluetooth 5.0 BLE standards
Support interface	UART SPI
Support interface	I2C PWM
Support the TF card	Maximum 4G support
IO	9
A serial port rate	115200 bps
Image output format	JPEG(Only OV2640 supported),BMP, GRAYSCALE
spectrum	2402 ~2480MHz
ANT	PCB antenna
Transmission power	Bluetooth: -0.200dBm
	CCK, 1 Mbps : -90dBm
	CCK, 11 Mbps: -85dBm
Reception sensitivity	6 Mbps (1/2 BPSK): -88dBm 54 Mbps (3/4 64-QAM): -70dBm
	MCS7 (65 Mbps, 72.2 Mbps): -67dBm
Power consumption	Turn off the flash:180mA@5V Enable the flash and set the brightness to the maximum:310mA@5V deep-sleep: the minimum power consumption is 6mA@5V modern -sleep: 20mA@5V light-sleep: the minimum power consumption is 6.7mA@5V
security	WPA/WPA2/WPA2-Enterprise/WPS
Scope of supply	5V
Working temperature	-20 °C ~ 85 °C

Storage environment	-40 °C ~ 90 °C , < 90%RH
---------------------	--------------------------

weight of the	10g
---------------	-----


Esp32-cam module picture output format rate

	QQVGA	QVGA	VGA	SVGA
JPEG	6	7	7	8
BMP	9	9	–	–
GRAYSCALE	9	8	–	–

Pin definition

CAM	ESP32	SD	ESP32
D0	PIN5	CLK	PIN14
D1	PIN18	CMD	PIN15
D2	PIN19	DATA0	PIN2
D3	PIN21	DATA1	PIN4
D4	PIN36	DATA2	PIN12
D5	PIN39	DATA3	PIN13
D6	PIN34		
D7	PIN35		
XCLK	PIN0		
PCLK	PIN22		
VSYNC	PIN25		
HREF	PIN23		
SDA	PIN26		
SCL	PIN27		
POWER PIN	PIN32		

Minimum system diagram

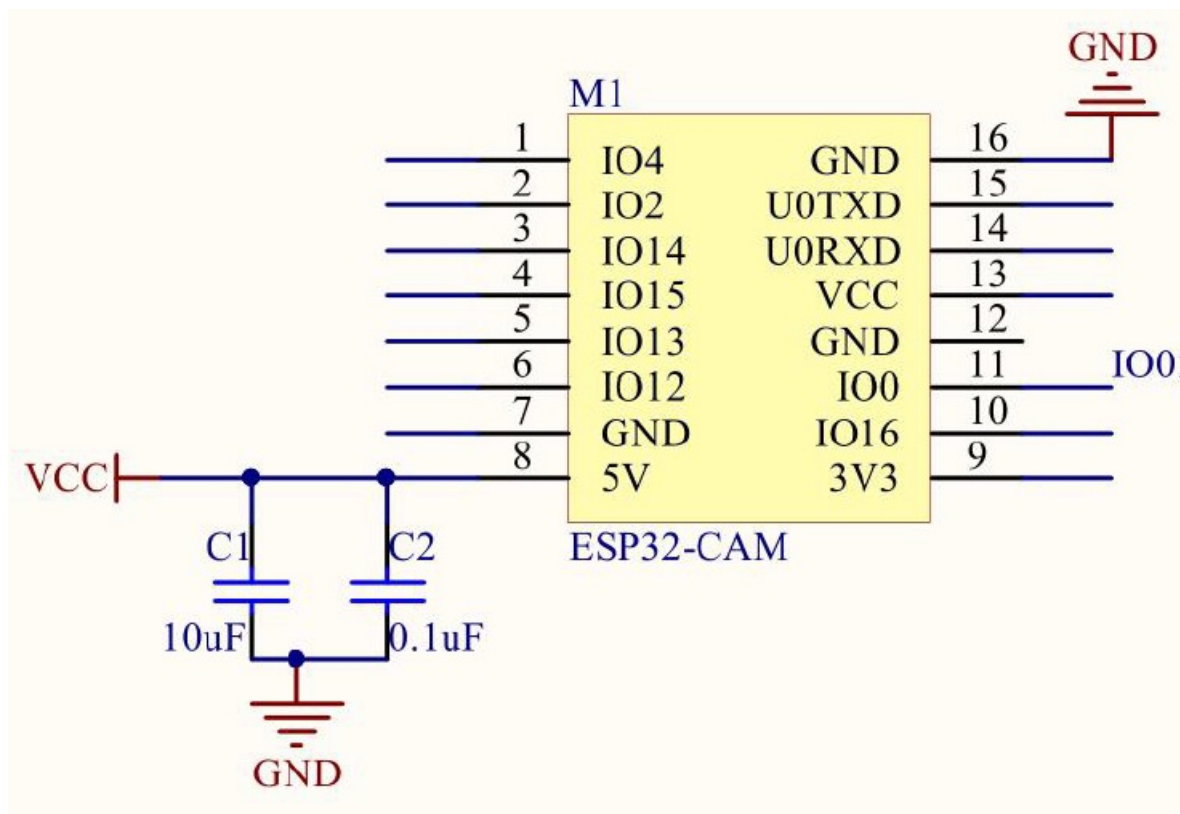

FCC STATEMENT

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. this device must accept any interference received, including interference that may cause undesired operation.

This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter. 15.105 Information to the user. For a Class B digital device or peripheral, the instructions furnished to the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance 20 cm between the radiator and your body.

Radiation Exposure Statement

- This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.
- This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

The availability of some specific channels and/or operational frequency bands are country dependent and are firmware programmed at the factory to match the intended destination. The firmware setting is not accessible by the end user. The final end product must be labeled in a visible area with the following: "Contains Transmitter Module "2A62H-FD1964".

Requirement per KDB996369 D03

List of applicable FCC rules

List the FCC rules that are applicable to the modular transmitter. These are the rules that specifically establish the bands of operation, the power, spurious emissions, and operating fundamental frequencies. DO NOT list compliance to unintentional-radiator rules (Part 15 Subpart B) since that is not a condition of a module grant that is extended to a host manufacturer. See also section 2.10 below concerning the need to notify host manufacturers that further testing is required.³

Explanation: This module meets the requirements of FCC part 15C (15.247).it Specifically identified AC Power Line Conducted Emission, Radiated Spurious emissions, Band edge, and RF Conducted Spurious Emissions, Conducted Peak Output Power, Bandwidth, Power Spectral Density, Antenna Requirement.

Summarize the specific operational use conditions

Describe use conditions that are applicable to the modular transmitter, including for example any limits on antennas, etc. For example, if point-topoint antennas are used that require reduction in power or compensation for cable loss, then this information must be in the instructions. If the use condition limitations extend to professional users, then instructions must state that this information also extends to the host manufacturer's instruction manual. In addition, certain information may also be needed, such as peak gain per frequency band and minimum gain, specifically for master devices in 5 GHz DFS bands.

Explanation: The product antenna uses an irreplaceable antenna with a gain of 1dBi

Single Modular

If a modular transmitter is approved as a "Single Modular," then the module manufacturer is responsible for approving the host environment that the Single Modular is used. The manufacturer of a Single Modular must describe, both in the filing and in the installation instructions, the alternative means that the Single Modular manufacturer uses to verify that the host meets the necessary requirements to satisfy the module limiting conditions. A Single Modular manufacturer has the flexibility to define its alternative method to address the conditions that limit the initial approval, such as shielding, minimum signaling amplitude, buffered modulation/data inputs, or power supply regulation. The alternative method could include the limited module manufacturer reviewing detailed test data or host designs prior to giving the host manufacturer approval. This Single Modular procedure is also applicable for RF exposure evaluation when it is necessary to demonstrate compliance in a specific host. The module manufacturer must state how control of the product into which the modular transmitter will be installed will be maintained such that full compliance of the product is always ensured. For additional hosts other than the specific host originally granted with a limited module, a Class II permissive change is required on the module grant to register the additional host as a specific host also approved with the module.

Explanation: The module is a single module.

Trace antenna designs

For a modular transmitter with trace antenna designs, see the guidance in Question 11 of KDB Publication 996369 D02 FAQ – Modules for Micro-Strip Antennas and traces. The integration information shall include for the TCB review the integration instructions for the following aspects: layout of trace design, parts list (BOM), antenna, connectors, and isolation requirements.

- Information that includes permitted variances (e.g., trace boundary limits, thickness, length, width, shape(s), dielectric constant, and impedance as applicable for each type of antenna);
- Each design shall be considered a different type (e.g., antenna length in multiple(s) of frequency, the wavelength, and antenna shape (traces in phase) can affect antenna gain and must be considered);
- The parameters shall be provided in a manner permitting host manufacturers to design the printed circuit (PC) board layout;
- Appropriate parts by manufacturer and specifications;
- Test procedures for design verification;
- Production test procedures for ensuring compliance The module grantee shall provide a notice that any deviation(s) from the defined parameters of the antenna trace, as described by the instructions, requires that the host product manufacturer must notify the module grantee that they wish to change the antenna trace design. In this case, a Class II permissive change application is required to be filed by the grantee, or the host manufacturer can take responsibility through the change in FCC ID (new application) procedure followed by a Class II permissive change application.

RF exposure considerations

It is essential for module grantees to clearly and explicitly state the RF exposure conditions that permit a host product manufacturer to use the module. Two types of instructions are required for RF exposure information: (1) to the host product manufacturer, to define the application conditions (mobile, portable – xx cm from a person's body); and (2) additional text needed for the host product manufacturer to provide to end users in their end-product manuals. If RF exposure statements and use conditions are not provided, then the host product manufacturer is required to take responsibility for the module through a change in FCC ID (new application).

Explanation: The module complies with FCC radiofrequency radiation exposure limits for uncontrolled environments. The device is installed and operated with a distance of more than 20 cm between the radiator and your body.” This module follows the FCC statement design, FCC ID: 2A62H-FD1964

Antennas

A list of antennas included in the application for certification must be provided in the instructions. For modular transmitters approved as limited modules, all applicable professional installer instructions must be included as part of the information to the host product manufacturer. The antenna list shall also identify the antenna types (monopole, PIFA, dipole, etc. (note that for example an “Omni-directional antenna” is not considered to be a specific “antenna type”). For situations where the host product manufacturer is responsible for an external connector, for example with an RF pin and antenna trace design, the integration instructions shall inform the installer that unique antenna connector must be used on Part 15 authorized transmitters used in the host product.

The module manufacturers shall provide a list of acceptable unique connectors.

Explanation: The product antenna uses an irreplaceable antenna with a gain of 1dBi

Label and compliance information

Grantees are responsible for the continued compliance of their modules to the FCC rules. This includes advising host product manufacturers that they need to provide a physical or e-label stating “Contains FCC ID” with their finished product. See Guidelines for Labeling and User Information for RF Devices – KDB Publication 784748.

Explanation: The host system using this module, should have a label in a visible area indicating the following texts: “Contains FCC ID: 2A62H-FD1964.

Information on test modes and additional testing requirements

Additional guidance for testing host products is given in KDBPublication 996369 D04 Module Integration Guide. Test modes should take into consideration of different operational conditions for a stand-alone modular transmitter in a host, as well as for multiple simultaneously transmitting modules or other transmitters in a host product. The grantee should provide information on how to configure test modes for host product evaluation for different operational conditions for a stand-alone modular transmitter in a host, versus with multiple, simultaneously transmitting modules or other transmitters in a host. Grantees can increase the utility of their modular transmitters by providing special means, modes, or instructions that simulates or characterize a connection by enabling a transmitter. This can greatly simplify a host manufacturer's determination that a module as installed in a host complies with FCC requirements.


Explanation: Dongguan Zhenfeida Network Technology Co., Ltd. can increase the utility of our modular transmitters by providing instructions that simulate or characterize a connection by enabling a transmitter.

Additional testing, Part 15 Subpart B disclaimer

The grantee should include a statement that the modular transmitter is only FCC authorized for the specific rule parts (i.e., FCC transmitter rules) listed on the grant, and that the host product manufacturer is responsible for compliance with any other FCC rules that apply to the host not covered by the modular transmitter grant of certification. If the grantee markets their product as being Part 15 Subpart B compliant (when it also contains unintentional-radiator digital circuitry), then the grantee shall provide a notice stating that the final host product still requires Part 15 Subpart B compliance testing with the modular transmitter installed.

Explanation: The module is without unintentional-radiator digital circuitry, so the module does not require an evaluation by FCC Part 15 Subpart B. The host should be evaluated by the FCC Subpart B.

Documents / Resources

	<p>DIGILOG ELECTRONICS ESP32-CAM Module [pdf] User Manual FD1964, 2A62H-FD1964, 2A62HFD1964, ESP32-CAM, Module, ESP32-CAM Module</p>
---	---