



## **DASDEC-III Hardware**



# **Digital Alert Systems DASDEC-III Hardware Installation Guide**

[Home](#) » [Digital Alert Systems](#) » Digital Alert Systems DASDEC-III Hardware Installation Guide 

### **Contents**

- [1 Digital Alert Systems DASDEC-III Hardware](#)
- [2 Product Usage Instructions](#)
- [3 FCC Information](#)
- [4 Disclaimer](#)
- [5 Register your DASDEC-III](#)
- [6 Introduction](#)
- [7 Hardware](#)
- [8 Panel Description](#)
- [9 Installation](#)
- [10 Wiring](#)
- [11 Connections](#)
- [12 Specifications](#)
- [13 Documents / Resources](#)
  - [13.1 References](#)



**Digital Alert Systems DASDEC-III Hardware**



## Specifications

- **Product Name:** DASDEC-III
- **Compliance:** FCC Part 11, Proposition 65
- **FCC ID:** R8VG3DAS01
- **Class:** Class A digital device

## Product Usage Instructions

### Installation

1. Ensure the DASDEC-III is placed in a commercial environment for optimal operation.
2. Follow the instruction manual for correct installation to prevent harmful interference.
3. Avoid operating the equipment in residential areas to prevent interference.

### Registration

- To stay updated with the latest software and news, register your DASDEC-III by filling out the form on the website or scanning the QR code on the unit's rear panel.
- Registered users will receive email notifications for updates and enhancements.

### FAQ

- **Q: What should I do if I encounter harmful interference?**

A: If you experience harmful interference, ensure the equipment is correctly installed as per the manual. If issues persist, contact customer support for assistance.

- **Q: Is a warning required for Proposition 65 compliance?**

A: Businesses must provide a warning if the product contains chemicals listed under Proposition 65. However, a warning may not be necessary if exposure levels are deemed safe.

## FCC Information

**FCC ID:** R8VG3DAS01

The DASDEC3 complies with Part 11 (47 CFR 11) of the FCC's rules for EAS encoders and decoders, including a Declaration of Conformity for Common Alerting Protocol (CAP) compliance, and are registered with the FCC under identification number: R8VG3DAS01.

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications.

Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his/her own expense.

### **California Proposition 65 Statement**

Proposition 65 is a California law officially known as the Safe Drinking Water and Toxic Enforcement Act of 1986 requires businesses to warn consumers about significant exposure to chemicals known to cause cancer, congenital disabilities, or other reproductive harm. Therefore, if a commercial product contains a chemical listed under Proposition 65, the business must warn California consumers. Businesses must provide a clear and reasonable warning before knowingly and intentionally exposing individuals in California to a listed chemical. However, a warning is not required if the anticipated exposure level will not pose a significant risk of cancer or is significantly below levels observed to cause birth defects or other reproductive harm.

Digital Alert Systems makes every effort to reduce or eliminate the use of hazardous substances. Products manufactured by Digital Alert Systems may contain chemicals such as lead and lead compounds listed by the state of California as causing cancer, birth defects, or other reproductive harm. Regardless, DAS products are designed and intended for commercial applications only and not for consumer sale or use. Therefore, exposure to hazardous chemicals in DAS products is considered "occupational exposure." Customers who purchase products for commercial applications in California, please refer to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov) for more information.

### **Disclaimer**

DIGITAL ALERT SYSTEMS, INC. MAKES NO WARRANTY OF ANY KIND ABOUT THIS MATERIAL, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Digital Alert Systems shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance, or use of this material. The only warranties for Digital Alert Systems products and services are outlined in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Digital Alert Systems shall not be liable for technical or editorial errors or omissions contained herein.


Copyright © 2004-2022 Digital Alert Systems, Inc. All rights reserved.

Alert Agent™, DASDEC™, EAS-Net™, MultiPlayer™, MultiStation™, One-Net™, OmniLingual™, PureCAP™, PureCAP™ Plus, TDX™, and Triggered CAP Polling™ are trademarks of Digital Alert Systems, Inc. All other trademarks mentioned in this document or website are the property of their respective owners. While every precaution has been taken in the preparation of this document, Digital Alert Systems assumes no responsibility for errors or omissions. Neither is any liability assumed for damages resulting from the use of the information contained herein.

- Safari is a registered trademark of Apple Inc.
- CODI is a registered trademark of Chyron Corporation.
- Chrome is a registered trademark of Google Inc.
- VDS-830, VDS-840, Starmu and Star-8 are trademarks of Keywest Technology, Inc.
- Internet Explorer is a registered trademark of Microsoft Corporation Firefox is a registered trademark of the

## Register your DASDEC-III

Register your DASDEC-III to stay up to date with the latest software and news regarding your DASDEC-III and future changes. To register, fill out the form at [www.digitalalertsystems.com/product-registration](http://www.digitalalertsystems.com/product-registration) and submit.

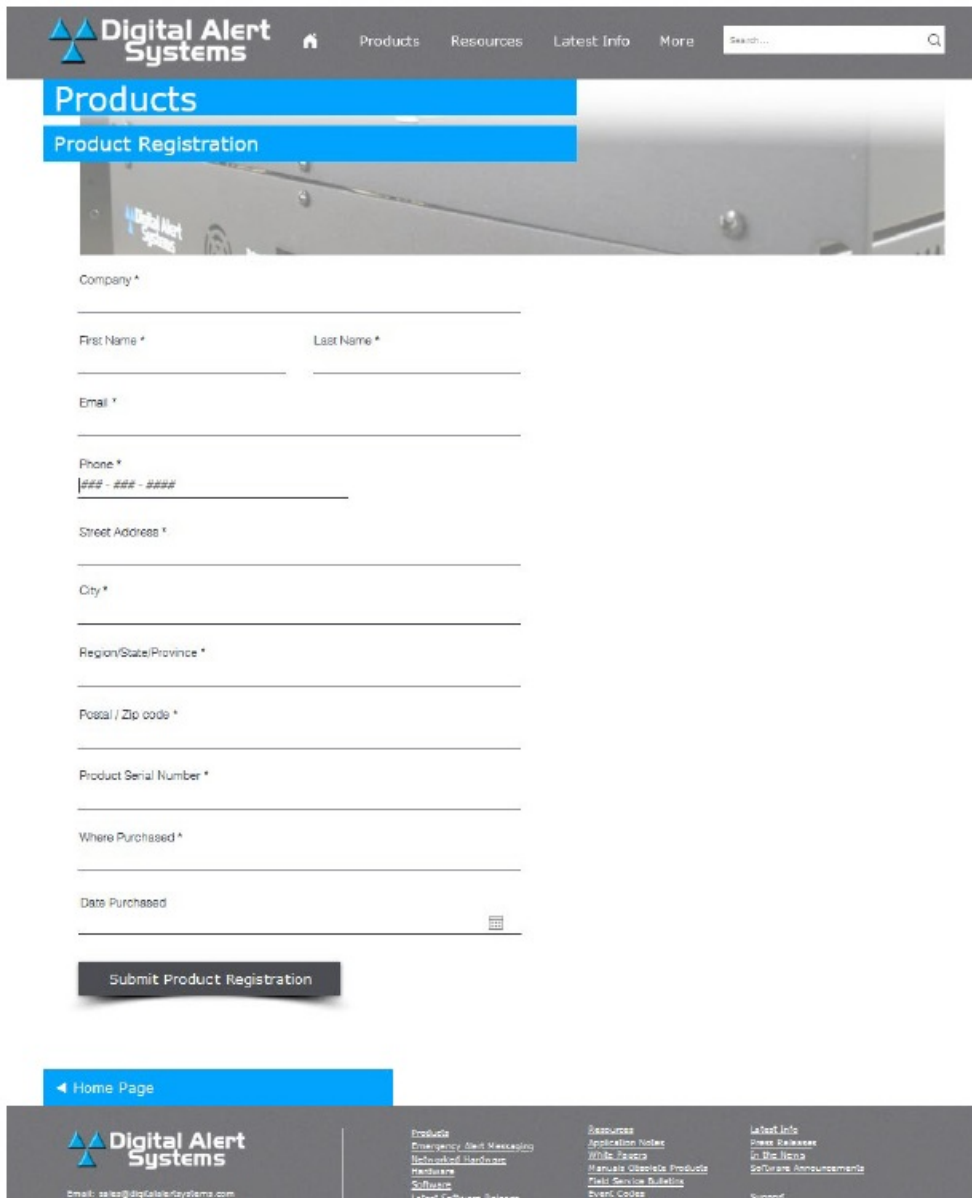

**Digital Alert Systems** Home Products Resources Latest Info More Search...

### Products

#### Product Registration

Company \*

First Name \* Last Name \*

Email \*

Phone \*  
### - ## - ####

Street Address \*

City \*

Region/State/Province \*

Postal / Zip code \*

Product Serial Number \*

Where Purchased \*

Date Purchased

Submit Product Registration

◀ Home Page

**Digital Alert Systems**  
Email: [sales@digitalalertsystems.com](mailto:sales@digitalalertsystems.com)

<b>Products</b> <a href="#">Emergency Alert Messaging</a> <a href="#">Networked Hardware</a> <a href="#">Hardware</a> <a href="#">Software</a> <a href="#">Latest Software Release</a>	<b>Resources</b> <a href="#">Application Notes</a> <a href="#">White Papers</a> <a href="#">Manuals/Onsite Products</a> <a href="#">Field Service Bulletin</a> <a href="#">Event Codes</a>	<b>Latest Info</b> <a href="#">Press Releases</a> <a href="#">In the News</a> <a href="#">Software Announcements</a> <a href="#">Support</a>
---	---	--



Or, scan the QR code to the right or on the S/N label on the unit's rear panel to submit your information. You will be notified by email of the latest updates and enhancements that can be downloaded from our website.

### Accessories included:

- Power cord
- 7-pin terminal block
- Network crossover cable,
- Four rack mounting screws.
- A VGA Dongle is provided when optional DAS3-MPEG2 or MPEG-DASH are purchased.

## Items NOT included:

- Wiring for audio and RF connections.

## Note:

ADAPTERS MAY BE REQUIRED to connect the audio sources. For more information, refer to the sections regarding Program Audio and Monitor 4 Wiring – Analog/ AES Digital.

## Getting Started – What’s needed:

- A PC, laptop, or tablet and an RJ45 networking cable.
- A valid, unused IP address. Speak with your network administrator for a proper IP address.
- The county names for the areas where the equipment will be installed and/or transmitted.
- The radio frequencies for your Local Primary 1 (LP1) and Local Primary 2 (LP2). These can be obtained from the state EAS plan or the State Emergency Communications Coordinator (SECC) for your state. If applicable, you may also need the frequency for a NOAA radio station.

## Introduction

The DASDEC-III Emergency Alert System (EAS) Analog and Digital CAP/ Encoder/Decoder platforms are relatively easy to install and set up. This manual covers the installation and hardware connections of the DASDEC-III.

## Hardware

The DASDEC-III is a 2U rack-mounted EAS device that utilizes standard computer technology in a dedicated chassis with broadcast-quality connectors. The PC motherboard uses industry-standard connectors for USB, PS/2, serial, VGA, HDMI, networking, and audio. In addition to the standard motherboard connections, the platforms feature broadcast-quality video, audio, antenna, contact closure, and power connectors. All external connectors are located in the rear of the unit. An LCD with a backlit tactile keypad, status/alert LEDs, and an internal speaker are located on the front of each unit.

## Panel Description

### Front Panel:



Front Panel view of the DASDEC-III

### Front Panel Display:

The backlit LCD information as “pages” with four lines of data. The fourth line always displays the currently set date and time. The pages may be cycled using the up and down arrows on the directional pad to the right of the display. The display automatically switches back to page one after a few seconds of inactivity.



### Page One:

- Line 1 – the total number of active alerts.
- Line 2 –a crawl of one of those active alerts and whether the alert was decoded (D), originated (O), CAP (C), or forwarded (F).
- Line 3 –the time that the currently displayed alert will end.



### Page Two:

- Line 1 – audio sources 1 through 4. Press the down arrow again to display the IPAWS sources.
- Line 2: source status: HIGH, ELEVated, OK, LOW, or ZERO.



- For IPAWS sources: CONNected, POLLing, or OFF is displayed.



### Page Three:

- Line 1 – device IP address.
- Line 2 – subnet mask.
- Line 3 – default gateway IP address.



#### Page Four:

- Line 1 – current software version.
- Line 2 – device name of the DASDEC-III.



#### Status LEDs


Light Emitting Diodes (LEDs) display a variety of system status conditions.

System Status	Green LED	Yellow LED	Red LED
Initial Power on	Off	Off	Rapid Flash
System begins to boot	Slow Flash	Off	Off
System nears a ready state	Rapid Flash	Off	Off
System ready	On	Off	Off
Decoding an incoming alert	On	Off	Rapid Flash w/ Pauses
Sending an alert	On	Off	On
Awaiting Manual forward or acknowledgment	On	Slow Flash	Off
Alert being Held for GPI closure	On	Off	Rapid Flash
EAS device is non-operational (during restart/ upgrade)	Flash	Off	Off

#### Back Panel

All hardware connections are provided on the device's back panel.

#### Back Panel View of the DAS3-GX or DAS3-EX with DAS3-AES and EXP-2NICGIG options

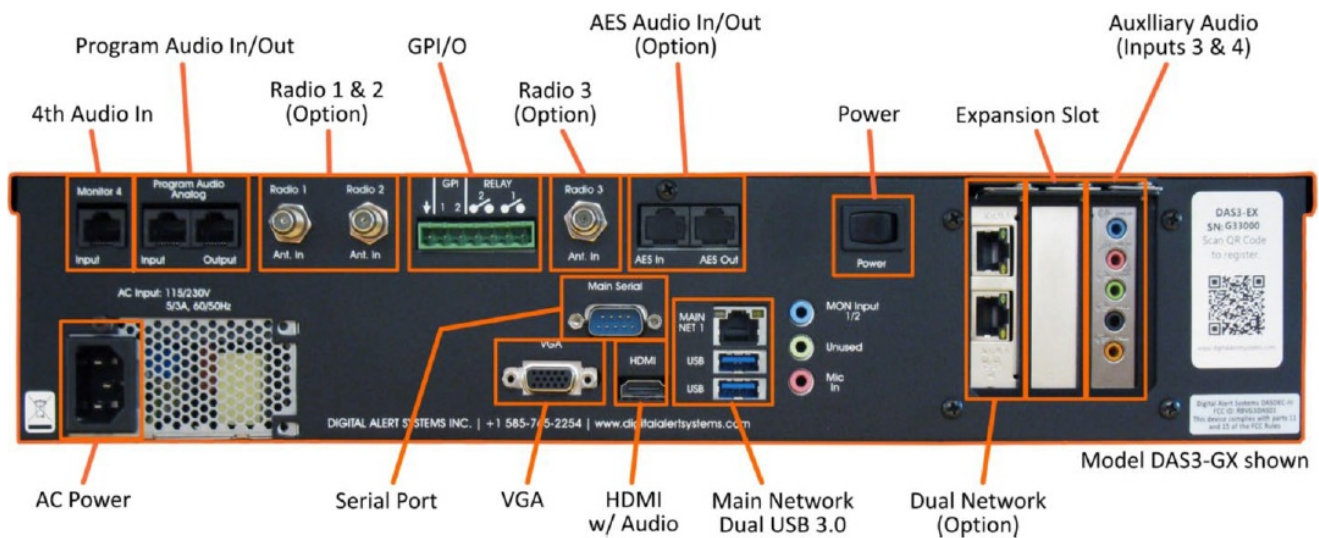

- The image above includes the Dual Port Gigabit Ethernet Expansion and AES Audio Options. Not all DASDEC-III devices will contain the same rear connectors.
- The Expansion Slots are used for optional additional Network Interfaces and additional EAS Audio input hardware. Expansion hardware is only available with the DAS3-EX or the DAS3-GX.

### Installation

The DASDEC-III frame mounts in an EIA-compliant equipment rack using four rack screws fastened through the front mounting ears.

#### For safe, long-term reliability:

- Ensure the ambient air temperature surrounding the EAS device is within the product’s specified operating temperature range.
- Maintain adequate ventilation within the rack.
- Ensure that adequate space exists on all sides of the frame for sufficient airflow. It is recommended a 1RU space be maintained between equipment, to avoid the transfer of heat between devices.
- Ensure the location of the EAS device is accessible, dry, and free of dust.

Rack Units	Height	Depth	Width	Weight
2RU	3.50" (9 cm)	9.00" (23 cm)	19.0" (48.2 cm)	10.2 lbs (4.6 kg)

### Radio Antennas

The EAS device can be equipped with two or three (optional) internal radio receivers and connect using industry-standard F-type connectors for each receiver. If not equipped, each radio’s F-type connector will be covered with a cap plug. Review your state’s Emergency Alert System Plan for the appropriate monitoring assignments; these assignments will assist in determining the proper antenna for the frequencies that need to be monitored.

The EAS device’s internal radios are designed to receive the following frequencies:



Band	Frequencies	Min. Input Level	Max. Input Level
FM	87.9 – 107.9 MHz	30-40 uV(-80 to -77 dBm)	1mV (-48 dBm)
NOAA	162.440 – 162.550 MHz	3-4 uV (-98 to -97 dBm)	<500 uv (-55 dBm)
AM	530 – 1700 KHz	2-3 uV (-102 to -98 dBm)	<500 uv (-55 dBm)

For proper reception, use a good quality, shielded RG6 coaxial cable and connectors. The quality of the incoming audio signal will affect the operation of the audio decoders, and the quality of the forwarded audio messages.

## Wiring


### Audio Wiring

#### Overview

- The DASDEC-III platform has two types of analog audio: EAS Monitored Audio and Program Audio.
- EAS Monitored Audio Inputs feed the internal EAS decoders for processing. Only signals with EAS information should be directed to these inputs. Program Audio connections are used for internal switching of program audio.

#### Program Audio and Monitor 4 Wiring – Analog/AES Digital (optional)

- The DASDEC-III utilizes RJ45-style connectors for analog and digital audio. These balanced audio outputs deliver a continuous audio program stream that switches between the Program Audio inputs and EAS audio during an alert.
- The following wiring diagram illustrates the connections using common T-568B cabling.

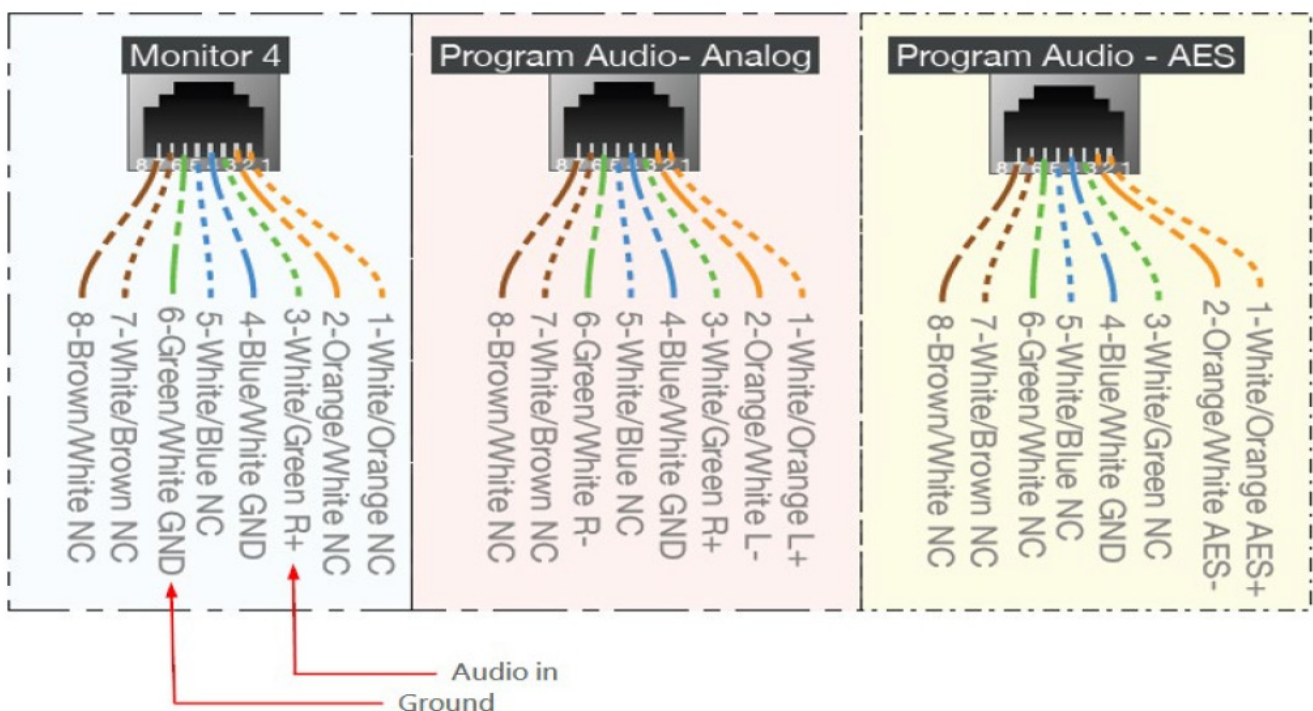

There are several sources for professionally terminated cables in various lengths and formats. One excellent source is Studio Hub (<https://studiohub.com/adapters/>)

## AES Digital Audio Wiring

An optional AES audio input/output function is available for the DASDEC platform. This includes the capability for an AES digital audio output, along with a switching AES audio output when an AES audio input is connected. Refer to the diagram above for the cabling of the AES audio inputs and outputs.

## EAS Monitoring Inputs


Radio signals for the DASDEC-III to decode EAS alerts can be received in two ways:

1. Via internal radios, connect to your site's antenna via a coaxial connection.
2. Via external radios that pass on audio to the DASDEC-III via a line-in-jack.

**Four connection options are available.**


- A line-in-jack connection with external radios using a 3.5mm jack. and
- An additional sound card (EXP-EAS) with its 3.5mm jack.
- Radio tuners Radios 1, 2, and 3
- Monitor 4 input

See the back panel graphic on the next page for references to specific components.

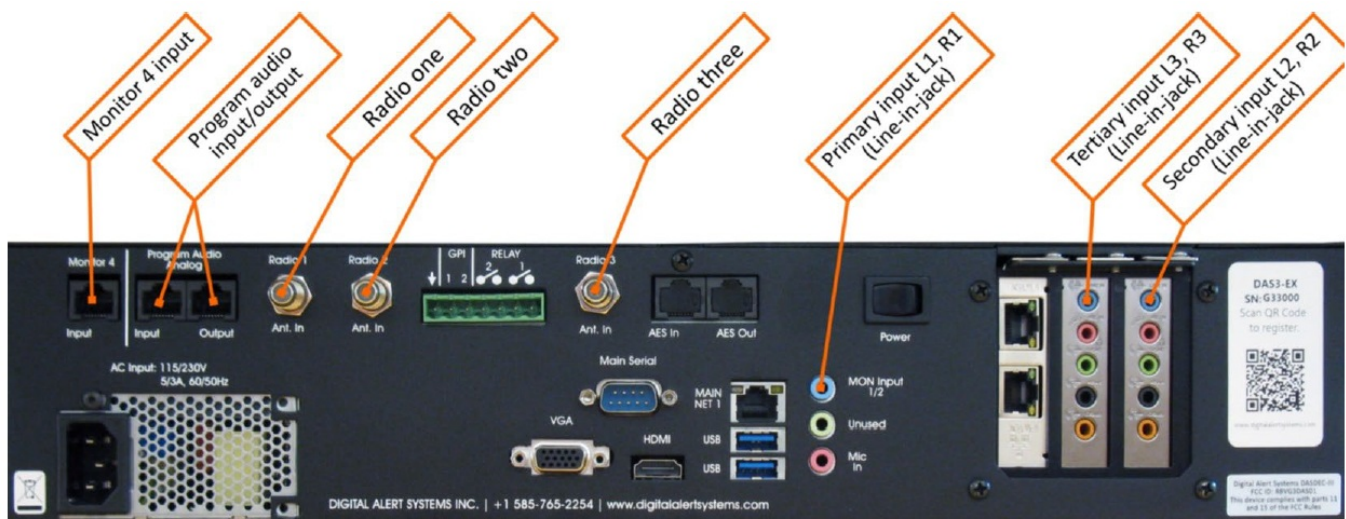

**Back Panel View shown with optional EXP-2NICGIG and EXP-EAS monitoring audio expansion**

- Each audio line connector (3.5mm TRS) supports two EAS decoders. The left side of the input is decoded separately from the right side.
- The line-in-jack option uses a monoaural connection, meaning that one 1/8 mini plug will need to be wired to provide the audio of two sources provided from external radios.
- **Refer to the diagram below:**
  - The tip is the left input, the ring is the right input, and the sleeve is common ground.
  - Line-in-jack will utilize the blue 3.5 mm jack for main inputs 1 & 2 and if applicable the blue 3.5 mm jack on the sound card or aux inputs 3 & 4.

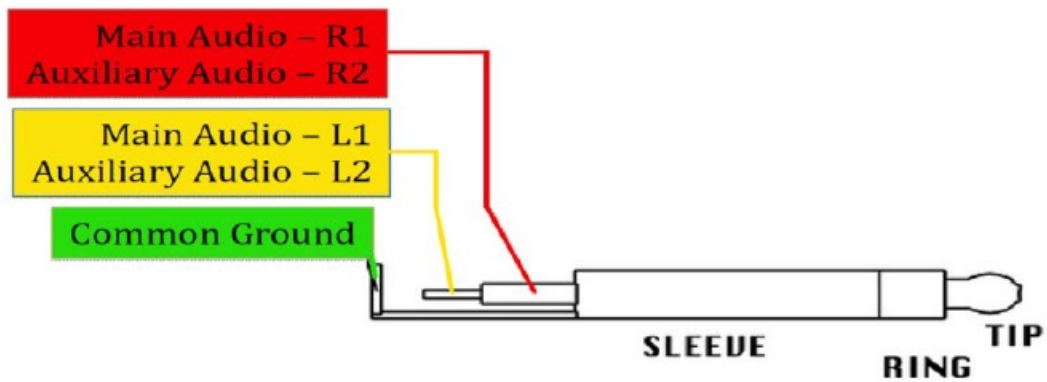

### Video Wiring

HDMI-Video Output is a standard on the DAS3-GX model and optional for all other DASDEC-III units. When enabled, full-screen emergency alert details and accompanying audio is present during alert forwarding and/or alert origination via the HDMI connector on the back panel.

### MPEG Encoder


The optional MPEG Encoder requires installing a “dongle” (shipped in the accessory kit) that must be placed on the VGA port. The system must have this installed during a cold start for the system to properly recognize that the port is active.



Back Panel View showing placement of MPEG “dongle”

### General Purpose Input/Output (GPIO)

The EAS platform comes standard with two General Purpose Input (GPI) contact closures and two General Purpose Output (GPO) relays. The connector is located on the back panel, a 7-pin pluggable terminal connector is provided.

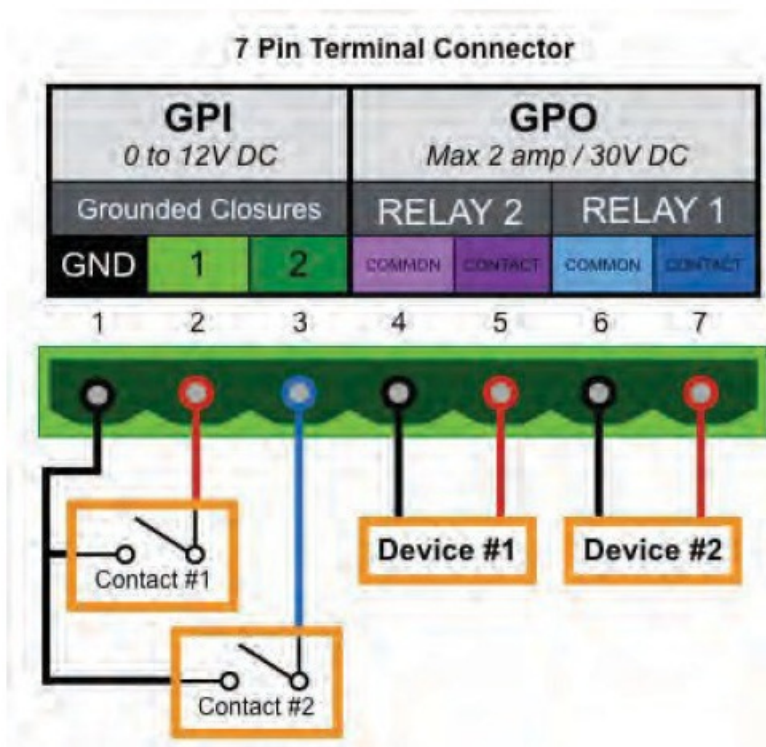

## GPIO Terminal Connector

GPO relay outputs are programmable. Triggering can be filtered against specific alert FIPS Groups and EAS Group codes. Events that can trigger a GPO relay include:

- Remain closed during EAS audio playback
- Momentarily closed at the start of EAS audio playback
- Momentarily closed at the start of an alert that has been decoded but not forwarded,
- Remain closed if an alert is held or delayed pending a GPI action.

**The EAS device comes with two General Purpose Input (GPI) contact closures. They can be programmed to trigger a variety of actions, such as:**

- Issue a Required Weekly test
- Trigger origination of an alert header/attention signal, pausing for voice dub of the audio message, followed by the trigger of the EOM audio
- Review of the audio portion of an active alert
- Active alert acknowledgment
- Forwarding of a monthly test with original audio
- Re-enabling active alert forwarding capability

### Additional Expansion GPIO Options


For installations that require additional GPIs and GPOs, there are several options available that will expand the standard capabilities. An internal GPIO card may be installed in the PCI expansion slot to enable eight additional GPIs and eight additional GPOs. If the PCI expansion slot is unavailable, several network-connected GPIO devices, such as the R190A Remote LAN Hub Controller / Net GPIO, are options. The DASDEC platform can mix and match any combination of internal and network-connected GPIO devices.



## Serial Port Wiring

- Each EAS device has one RS-232 serial port on the back panel. The serial ports connect to and drive a variety of external video character generators and BetaBrite LED signs. The software supports a wide variety of serial protocols, including the most commonly used protocols in legacy EAS equipment, such as TFT Standard and Sage Generic.
- An optional USB/serial port expander can provide up to four additional RS-232 serial ports. This option is useful when additional character generators and LED signs are needed.
- Each serial port has the same pin-out, as shown below.


### Serial Port Conns (Chassis Side)

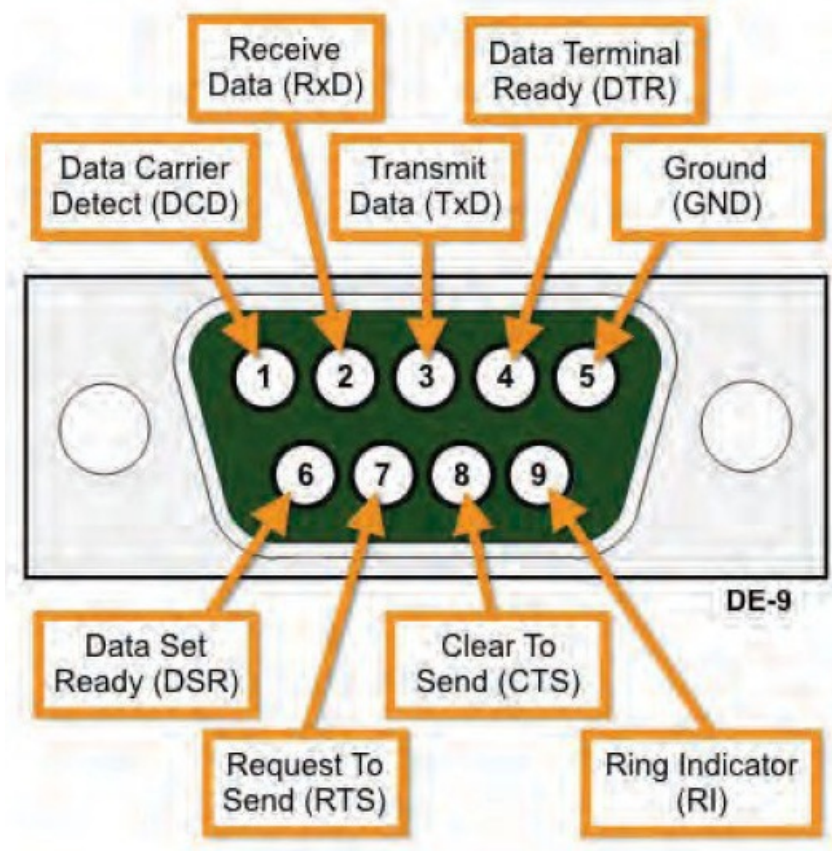

## Connections

### Direct Connection



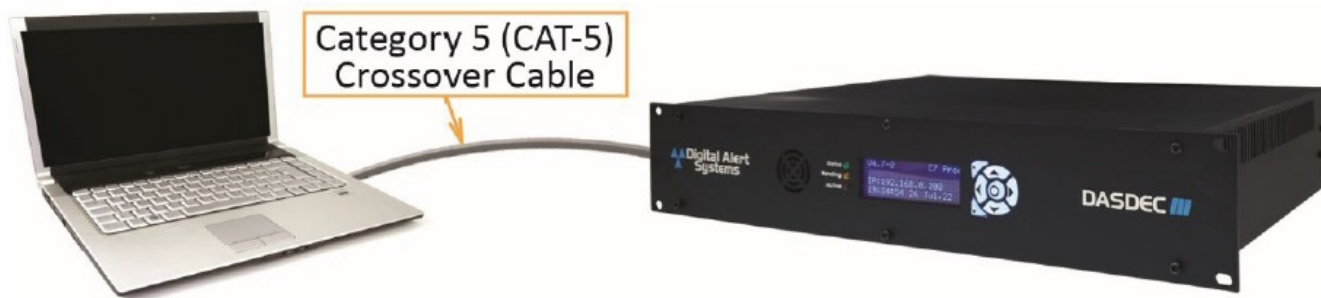


### Direct Connection

Connect one end of the factory-supplied CAT-5 network crossover cable to the Main Network Interface port at the back of the EAS device and the other end to the network interface port of a standalone PC or laptop computer. Once the EAS platform is powered up and completely booted, it can be accessed via a web browser launched from the directly connected, customer-supplied standalone computer.

### Attention

It is advised that you contact a network administrator before starting the following procedure, as a valid IP address and subnet mask settings are required to complete this initial setup. Working knowledge of how to change the network settings of the standalone computer is also necessary.

### Hub/Switch Connection

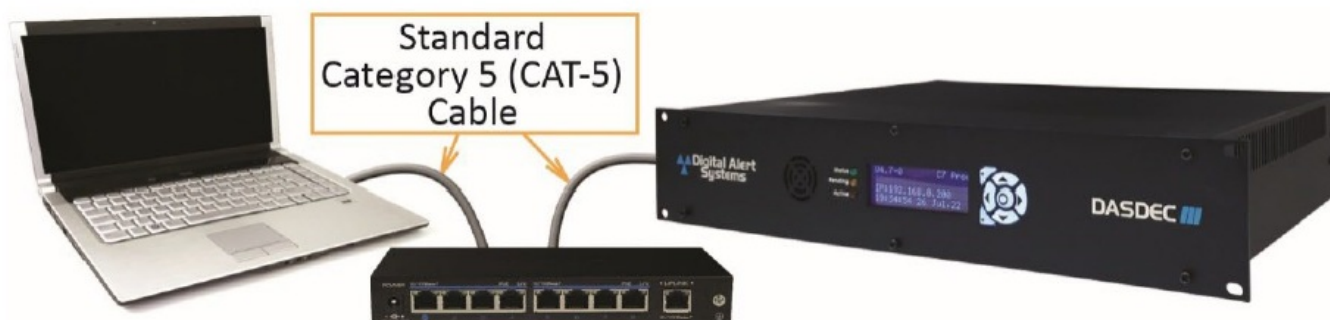

### Hub/Switch Connected

The primary difference between this type of connection and the direct connection method is the inclusion of additional networking hardware.

1. Connect a standard CAT-5 network cable to the Main Network Interface port at the back of the EAS device and the other end into the open port of a routing hub or other network switching device.
2. Once the EAS device is powered up, booted, and operational, it should be accessible via a web browser running on any remote computer on the local area network routed to see the address 192.168.0.200.

### Specifications

DASDEC-III Specifications	DAS3-EL	DAS3-EX	DAS3-GX	DAS3-CX
---------------------------	---------	---------	---------	---------


Monitoring Audio Inputs: monaural EAS monitoring inputs	Two (2)	Four (4)	Four (4)	Four (4)
Internal Monitoring Receivers – Integrated Dual Tri-B and receivers (AM/ FM/WX)  Tunable frequencies: AM 520 to 1720 kHz   FM 76 to 108 MHz   WX 162.4 to 162.55 MHz  Connector: “F” type – 50Ω	DAS3- 2RA DIO  Optional	DAS3- 3RA DIO  Optional	DAS3- 3RA DIO  Standard	DAS3-3RAD IO  Standard
Monitoring Audio Expansion  <b>EXP-EAS-E</b> adds two (2) additional monaural inputs (6 total)	N/A	Optional	Optional	Optional
<b>Program Audio</b>				
Analog Input / Output – Balanced 600Ω stereo audio input – fail-safe bypass relay.  Connector: RJ-45 in/out using StudioHub™ wiring standard  MAY REQUIRE ADAPTORS – SOLD SEPARATELY <sup>1</sup>				
Digital Input– DAS3-AES  Balanced 110Ω AES/EBU digital audio input  Connector: RJ-45 in/out using StudioHub wiring standard MAY REQUIRE ADAPTORS – SOLD SEPARATELY <sup>1</sup>	Optional	Optional	Standard	Optional
Digital Output – DAS3-AES  Balanced 110Ω AES/EBU digital audio synced to incoming rate, or 48 kHz without reference  Connector: RJ-45 in/out using StudioHub wiring standard  MAY REQUIRE ADAPTORS – SOLD SEPARATELY <sup>1</sup>	Optional	Optional	Standard	Optional
Auxiliary Audio Output – Un-balanced lo-Z audio   Connector: 1/8” mini-plug	N/A	Standard	Standard	Standard
LAN Interface – TCP/IP Ethernet:  One (1) 10/100/1G BASE-T   Default Address: 192.168.0.200  Connector: RJ45  Green link & amber data indicators				
<b>Network Expansion</b>				
<b>USB-1NICGIG</b> External single port adaptor USB-RJ 45 Connector: USB-RJ45	Optional	Optional	Optional	Optional

<b>EXP-2NICGIG</b> Internal dual 10/100/1000 BASE-T  IP addressing: static (ports 1-4) or DHCP (ports 1 & 2) Connector: RJ45	N/A	Optional	Standard	Standard
Video Output – Full-screen Slate Video Output License  VGA: Maximum resolution: 1920 x 1200 @60Hz   Connector: DB-15 HDMI 1.4: Max. resolution: 4096x 2160 @30Hz Connector: Type A HDMI output includes embedded alert audio	Optional	Optional	Standard	Standard
General Purpose Inputs/Outputs (GPIOs) Two (2) software-defined inputs  Two (2) software-defined outputs rated 2A @30VDC  Connector: 7-pin detachable terminal strip				
Serial Port – One (1) RS232 data 9 pin “D” connector   Optional <b>USB/4RS232</b> adds four additional RS-232 ports (5 max.)				
USB ports:  sockets Two (2) USB V3.1   Connector: type A sockets				
Front Panel Display – LCD matrix display: Four rows of 20 characters Status lamps – Green, Yellow, Red	Monochrome backlit	Color backlit		
Expansion Port – Triple EXpansion slots for the following options:  <b>EXP-EAS-E</b> – Two (2) monitoring audio inputs (6 total)  <b>EXP-GPIO-E</b> – Eight (8) additional GPIOs and GPOs (10 total) using external breakout box and cabling  <b>EXP-2NICGIG</b> – Dual gigabit network expansion (3 total)	N/A	Two expansion ports are available	EXP-2NICGIG Included On the expansion port available	
Power (90 – 264 VAC) max. 85% RH non-condensing	16W	20W	21W	22W
Dimensions / Weight – 19" W x 9" D x 3.5" H (48.2cm W x 23 cm D x 9 cm H) 2RU EIA rackmount / 10.2 lbs. (4.6 Kgs)				
Environmental – Ambient temperature range of 0 to +50 degrees C. Relative humidity of up to 95% (non-condensing)				




Copyright © 2022-2024 Digital Alert Systems, Inc. Information herein is considered accurate at the time of publication. We constantly strive to improve our products and services therefore some specifications are subject to change without notice. DASDEC, MultiStation, and EAS-Net are trademarks of Digital Alert Systems. All rights reserved.

- [585-765-1155](tel:585-765-1155) | fax [585-765-9330](tel:585-765-9330) 100 House I Ave. | Lyndonville | NY | 14098
- [www.digitalalertsystems.com](http://www.digitalalertsystems.com).

## Documents / Resources

	<p><a href="#">Digital Alert Systems DASDEC-III Hardware</a> [pdf] Installation Guide DASDEC-III Hardware, DASDEC-III, Hardware</p>
---	---

## References

-  [EAS | Digital Alert Systems](#)
-  [Product Registration | DAS](#)
-  [P65Warnings.ca.gov](http://P65Warnings.ca.gov)
- [User Manual](#)

### Manuals+. Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.