

# DIGITALas Di-K2F TTLock Smart Touch Coded Keypad User Manual

[Home](#) » [DIGITALas](#) » DIGITALas Di-K2F TTLock Smart Touch Coded Keypad User Manual 

## Contents

- [1 DIGITALas Di-K2F TTLock Smart Touch Coded Keypad](#)
- [2 Smart Access Controller K2/K2F](#)
- [3 Accessories](#)
- [4 Illustration](#)
- [5 Pair the access controller with app](#)
- [6 Limited Warranty](#)
- [7 Documents / Resources](#)
- [8 Related Posts](#)

# DIGITALas


**DIGITALas Di-K2F TTLock Smart Touch Coded Keypad**




### Smart Access Controller K2/K2F

- **Model:** K2/K2F
- **Dimensions:** W79mm x H125mm x T15.5mm
- **Material:** Aluminum frame/Tempered glass panel
- **Communication:** Bluetooth 4.1
- **Supporting systems:** Android 4.3/IOS7.0 above
- **Stand-by current:**  $\approx 5\text{mA}$
- **Operating current:**  $\approx 1\text{A}$
- **Power supply:** 12V
- **Unlocking time:**  $\approx 1.5\text{S}$
- **Waterproof level:** IP66
- **Card capacity:** 20,000 Cards


### Accessories

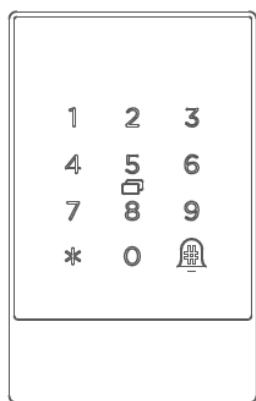


Access  
controller x1



Manual x1




Cable x1



Hook x 1

Mounting plate x 1  
Screw: 2+4+1

## Illustration

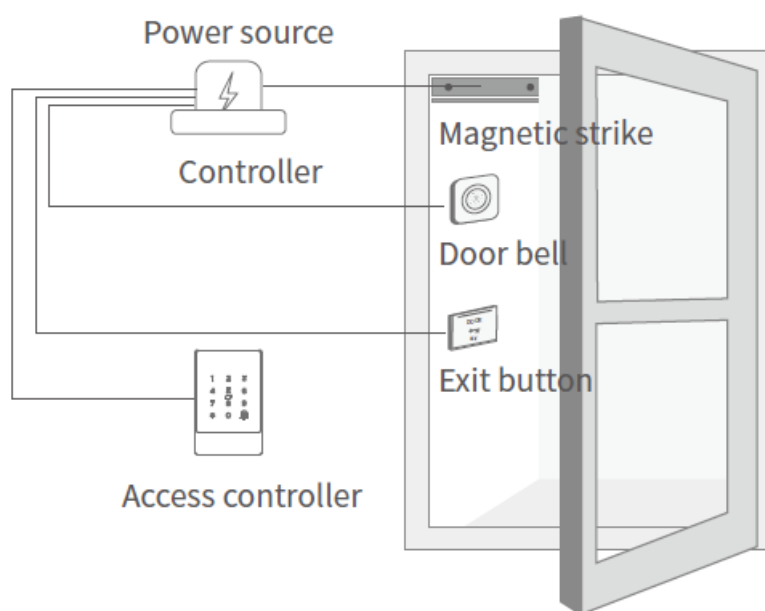


## Drill a hole for the cable




- Drill a hole at appropriate position to make space for the cable to connect to the power source.

## Install the mounting plate

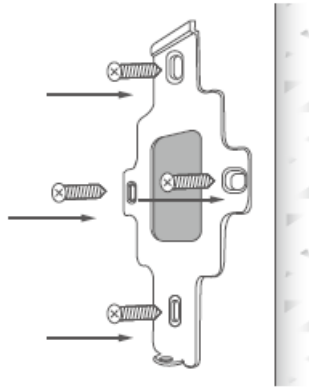


- Fix the mounting plate with 4 screws.

## Wiring

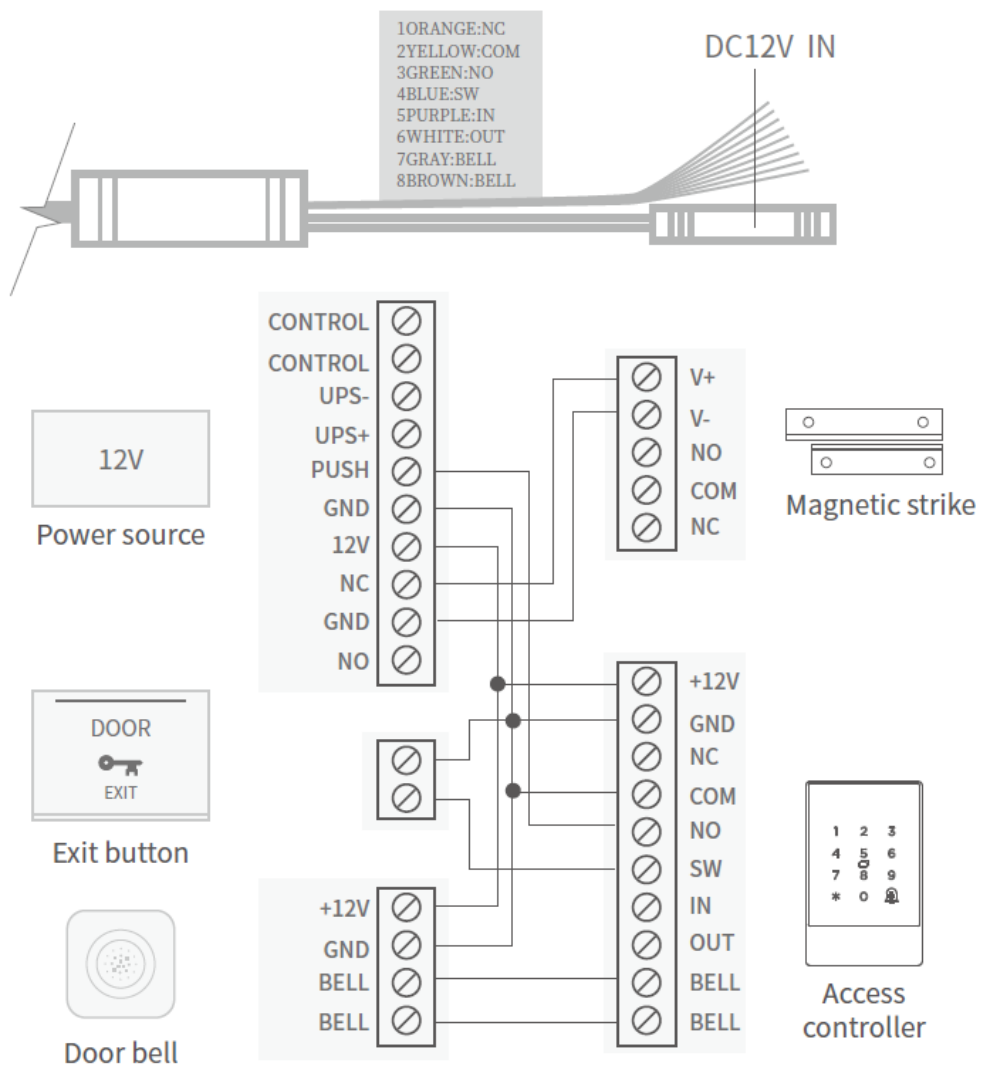


Connect the cable of the access controller to power cable and other ports according to the illustration.

## Install the hook

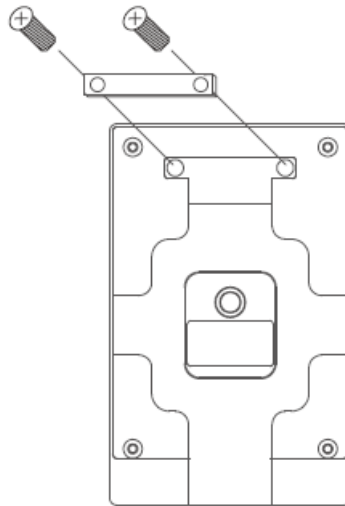



- Fix the hook to the mounting plate with 2 screws.

## Install the access controller

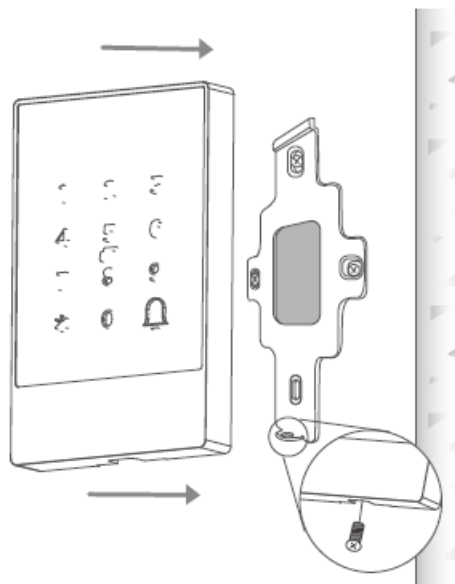

- Fit the access controller into the hook and fix it on the mounting plate with a screw in the bottom.

## Pair the access controller with app

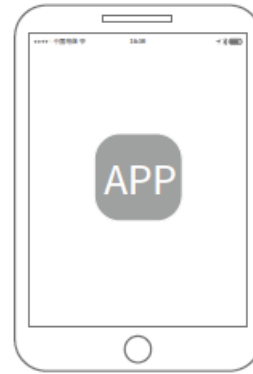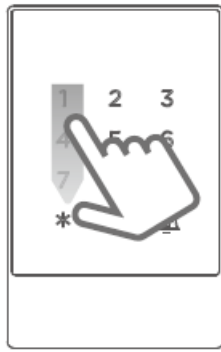

1. Tap the panel to light it up and activate the lock.
2. On voice prompt“ Please add Bluetooth Administrator”, activate the APP.




3. Tap the“ ” icon on the upper left corner, tap“ +Add Lock”, select“ Door Lock”.
4. Tap the device shown on the screen. Wait a few seconds till the lock gives a voice prompt/long beap, which means it is added successfully.

**Notice:** If fails, please shut off the APP and Bluetooth turn them on and try the above process again.

## Limited Warranty

1. For any defect in material and workmanship, the original purchaser of the product
  1. Can return or ask for a replacement within 7 invoice days.
  2. Can ask for a replacement within 15 invoice days.
  3. Can ask for free repair in 365 invoice days.
2. This warranty does not cover defects caused by modification, alteration, misuse or physical abuse of the product.

## Documents / Resources

	<a href="#">DIGITALas Di-K2F TTLock Smart Touch Coded Keypad [pdf]</a> User Manual Di-K2F TTLock Smart Touch Coded Keypad, Di-K2F, TTLock Smart Touch Coded Keypad, Smart Touch Coded Keypad, Touch Coded Keypad, Coded Keypad
---	---