



DIGITUS DA-90424 Variable Notebook Stand Installation Guide

[Home](#) » [DIGITUS](#) » DIGITUS DA-90424 Variable Notebook Stand Installation Guide 

DIGITUS DA-90424 Variable Notebook Stand



Contents

- [1 Introduction](#)
- [2 Features](#)
- [3 Specifications](#)
- [4 Package Content](#)
- [5 Dimensions](#)
- [6 Documents / Resources](#)
 - [6.1 References](#)
- [7 Related Posts](#)


Introduction

The adjustable notebook stand from DIGITUS® combines ergonomic design and connectivity in one convenient unit. You can easily adjust the angle of inclination to your height in 5 levels. Your notebook can be connected via

the USB-C™ port, allowing you to access all USB interfaces of the hub. 4 fully-functional USB A ports (USB 3.2 Gen1) and a USB-C™ power with Power Delivery are available. An optional USB-C™ power adapter, for example, delivers up to 100 W of charging power (Power Delivery) for a connected notebook and the USB-A ports (85 W / 15 W). Use the advantages of ergonomic design and connectivity in a single unit with the DIGITUS® notebook stand with integrated USB hub.

Features

- Extends your notebook by 5 additional USB interfaces + USB-C™ Power Delivery
- Supports USB 3.2 Gen1, SuperSpeed, 5 Gbps
- Charging power of all USB A connections: 15 W max.
- Can be individually adjusted to your height, can be set to 5 different angles of inclination (15°-36°)

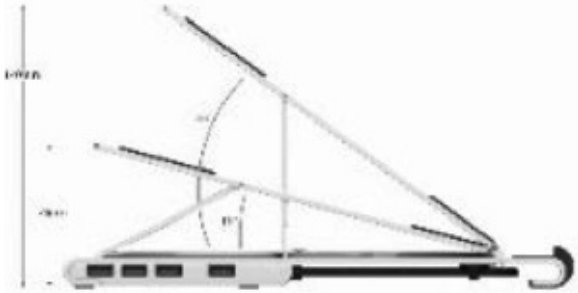

- Cable wrapped design: designed with cable cord for wrapping cable when not used
- Foldable



Specifications

Input/Output Connector	
Upstream	Type-C Male x1
Downstream	USB A 5G x4 Type-C Female (PD charging)
Type-C Male x1	
<ul style="list-style-type: none"> Connect host, for transmitting max. 5 Gbps data transmission 	
USB A x4	
<ul style="list-style-type: none"> Compliant with USB 3.2 Gen1 with max. 5 Gbps data transmission, downward compatible with lower versions One USB-A (farthest from Type-C port) supports max 1.5 A downstream charging, 4x USB A share max 15 W 	
Type-C PD charging	
<ul style="list-style-type: none"> Support max 85 W PD charging, max 85 W PD charging for PC (15 W is dedicated to the functioning of this product) Support fast role swap of PD 3.0, the connected device will not get connected while plugging in and out PD Adapter 	
Environmental	
Operating Temperature	0 °C – 45 °C
Operating Humidity	10 % – 90 % RH (non condensing)
Storage Temperature	0 °C – 70 °C
Storage Humidity	10 % – 90 % RH (non condensing)

Package Content

- 1 x Variable Notebook Stand with integrated USB-C™ Hub, 5-Port
- 1 x QIG

Dimensions




Hereby Assmann Electronic GmbH, declares that the Declaration of Conformity is part of the shipping content. If the Declaration of Conformity is missing, you can request it by post under the below mentioned manufacturer address.

www.assmann.com

Assmann Electronic GmbH
Auf dem Scuffle 3
58513 Ludenscheid
Germany



Documents / Resources

 <p>DIGITUS Variable Notebook Stand with Integrated USB-C™ Hub, 5 Port Quick Installation Guide DA-9042</p>	<p>DIGITUS DA-90424 Variable Notebook Stand [pdf] Installation Guide DA-9042, Variable Notebook Stand</p>
--	---

References

- [ASSMANN Electronic GmbH | Germany](#)

[Manuals+](#)