

[Manuals.plus](#) /

> [VEZQUA](#) /

> VEZQUA J88 USB C Wireless Lavalier Microphone User Manual

## VEZQUA J88

# VEZQUA J88 USB C Wireless Lavalier Microphone User Manual

Model: J88

## 1. PRODUCT OVERVIEW

---

The VEZQUA J88 is a wireless lavalier microphone system designed for high-quality audio recording with USB-C compatible devices, including Android phones, iPhone 15 series, laptops, and computers. It features 2.4GHz wireless technology, advanced noise reduction, and a plug-and-play design for ease of use.



Image 1.1: Overview of the VEZQUA J88 wireless lavalier microphone system, showing two microphones with windproof covers and a USB-C receiver.

## Package Contents:

- 2 x Wireless Lavalier Microphones
- 1 x USB-C Receiver
- 2 x Windproof Covers (Furry Windscreen)
- 1 x Charging Cable (USB-A to USB-C)
- 1 x User Manual (this document)

## 2. SETUP GUIDE

---

### 2.1 Charging the Microphones

Before first use, fully charge both microphones. Connect the charging cable to the microphone's charging port and a USB power source. The battery indicator on the microphone will show charging status.

# Extended 12 Hrs Battery Life

Never miss a beat with our long battery life microphone



 **1.5H**

Charging Time

 **6H**

Usage time (single mic)

 **12H**

Total (two mics)

Image 2.1: Illustration showing the VEZQUA J88 microphone connected to a charging cable, indicating a 1.5-hour charging time for 6 hours of single microphone usage or 12 hours total for two microphones.

## 2.2 Connecting to Your Device

1. **Insert the Receiver:** Plug the USB-C receiver into the USB-C port of your smartphone (Android/iPhone 15 series), laptop, or computer.
2. **Power On Microphones:** Long press the power button on each microphone for 3 seconds to turn them on. The pairing indicator will flash, indicating they are searching for the receiver.
3. **Automatic Pairing:** The microphones will automatically pair with the receiver. Once paired, the pairing indicator light on the microphone will turn solid green.
4. **Android OTG Function:** For Android users, ensure the OTG (On-The-Go) function is enabled in your device settings if the microphone is not recognized. This setting is typically found under 'System' or 'Connected devices'.

## Reverberation

### Enjoy your music world

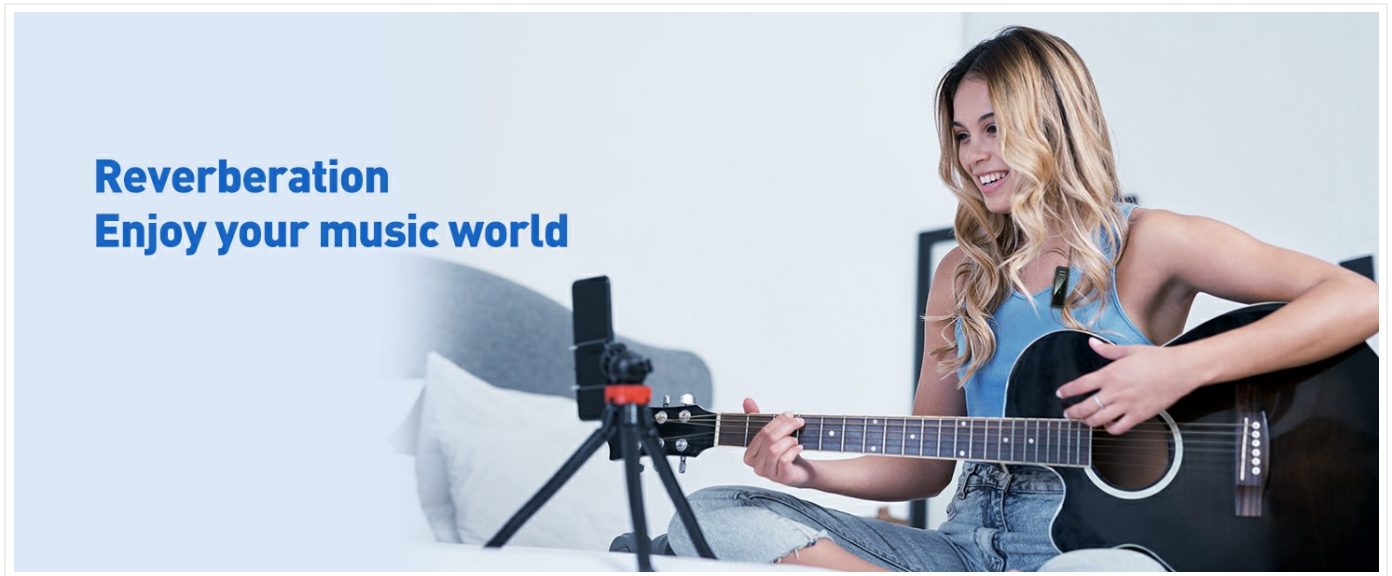


Image 2.2: The USB-C receiver plugged into a smartphone and a laptop, with two microphones shown nearby, illustrating versatile wireless connectivity.

## 3. OPERATING INSTRUCTIONS

### 3.1 Microphone Controls

- **Power On/Off:** Long press the power button (**U**) for 3 seconds.
- **Mute/Unmute:** Double-click the power button (**U**) to mute or unmute the microphone. The mute indicator will illuminate when muted.
- **Noise Reduction On/Off:** Single click the 'M' button to toggle noise reduction.
- **Reverberation On/Off:** Double-click the 'M' button to toggle the reverberation effect.



Image 3.1: Diagram illustrating the control functions of the VEZQUA J88 microphone, including power, mute, noise reduction, and reverberation buttons.

### 3.2 Indicator Lights

- **Pairing Indicator:** Flashes when searching for receiver, solid green when paired.
- **Noise Reduction Indicator:** Illuminates when noise reduction is active.
- **Mute Indicator:** Illuminates when microphone is muted.

- **Battery Indicator:** Displays current battery level.



Image 3.2: Close-up of the VEZQUA J88 microphone showing the professional indicator display for pairing, noise reduction, mute, and battery status.

### 3.3 Using the Windproof Cover

Attach the provided furry windproof cover to the microphone when recording in outdoor or windy environments to minimize unwanted noise and improve audio clarity.

## 4. MAINTENANCE

- **Cleaning:** Use a soft, dry cloth to clean the microphone and receiver. Do not use liquid cleaners or solvents.
- **Storage:** Store the device in a cool, dry place away from direct sunlight and extreme temperatures.
- **Battery Care:** To prolong battery life, avoid fully discharging the microphones frequently. Charge them regularly, even if not in use for extended periods.

- **Windproof Cover:** The furry windproof covers can be gently cleaned with a soft brush if they accumulate dust or debris.

## 5. TROUBLESHOOTING

---

- **No Sound/Microphone Not Detected:**

- Ensure the receiver is fully inserted into your device's USB-C port.
- Verify both microphones are powered on and successfully paired (solid green pairing indicator).
- For Android devices, check if the OTG function is enabled in your phone's settings.
- Confirm your recording application is set to use the external microphone.

- **Poor Audio Quality/Noise:**

- Ensure the microphone is positioned correctly, ideally clipped near the mouth.
- Activate the noise reduction feature by single-clicking the 'M' button.
- Use the windproof cover in windy environments.
- Check for obstructions between the microphone and receiver that might interfere with the wireless signal.

- **Microphone Not Charging:**

- Ensure the charging cable is securely connected to both the microphone and the power source.
- Try a different USB power adapter or port.

- **Short Battery Life:**

- Ensure microphones are fully charged before use.
- Battery performance can degrade over time with extensive use.

## 6. SPECIFICATIONS

---

Feature	Specification
Model Number	J88
Connectivity Technology	2.4GHz Wireless
Connector Type	USB Type-C
Compatible Devices	Smartphones (Android, iPhone 15 series), Laptops, Computers
Special Feature	Noise Reduction
Microphone Form Factor	Lavalier
Polar Pattern	Unidirectional
Battery Type	Lithium Ion
Battery Life (Single Mic)	Up to 6 hours
Battery Life (Two Mics)	Up to 12 hours total
Charging Time	Approximately 1.5 hours

Transmission Range	Up to 100 feet (30 meters)
Item Weight	2.72 ounces (approx. 77 grams)

## 7. WARRANTY AND SUPPORT

---

VEZQUA provides a 1-Year Warranty for this product. For technical support, warranty claims, or any inquiries, please contact VEZQUA customer service. Refer to the product packaging or the official VEZQUA website for contact information.

- **Warranty Period:** 1 Year
- **Support:** 24/7 VIP Support
- **Additional Resources:** Professional User Guides, Free Replacement options

