

[Skip to content](#)

Manuals+

User Manuals Simplified.



DIGITUS DS-55319 Click and Present Mini Wireless Presentation System User Manual

August 6, 2022 August 6, 2022 [Leave a comment on DIGITUS DS-55319 Click and Present Mini Wireless Presentation System User Manual](#)

[Home](#) » [DIGITUS](#) » DIGITUS DS-55319 Click and Present Mini Wireless Presentation System User Manual 

Contents [hide](#)

[1 DIGITUS DS-55319 Click and Present Mini Wireless Presentation System](#)

[2 Introduction](#)

[3 Main Features](#)

[4 Package Content](#)

[5 Product Features](#)

[6 Product Specification](#)

[7 Overview](#)

[8 Installation](#)

[8.1 Receiver Installation](#)

[9 Transmitter Installation](#)

[10 Pairing Transmitter and Receiver](#)

[11 Streaming](#)

[12 Streaming from smart devices \(smartphone/tablet\)](#)

[13 Frequency Range & Maximum Transmit Power](#)

[14 Important safety instructions](#)

[15 Disclaimer](#)

[16 Documents / Resources](#)

[16.1 Related Manuals / Resources](#)



DIGITUS DS-55319 Click and Present Mini Wireless Presentation System



Introduction

With the Wireless Presentation System, you can wirelessly transmit HDMI video and audio signals in Full HD over a distance of up to 50 m with an unobstructed view. Operation and installation are super simple. Real Plug & Play – Just plug in and get started. With additional transmitters (DS-55320), the set can be extended to up to 16 transmitter units (total). Switch to the desired transmitter quickly and easily at the press of a button in order to reproduce your content. You can also share content directly from your mobile device (smartphone/tablet) using your device's OS directly, no additional app is required. The transmitter and receiver can be supplied with power via your device's HDMI connection (0.5A required), or alternatively (additionally) with the enclosed Micro USB cable via the USB connection of your notebook, PC, etc. Thanks to the compact design of the transmitter and receiver, installation is easy, quick, and can be customized – the perfect solution for meeting and conference rooms.

Main Features

- Wireless HDMI signal transmission up to 50 m (with an unobstructed view)
- Supports up to 16x transmitters (sources) + 1x receiver (output device)
- Extend this set with up to 16 transmitter units (DS-55320)
- Switch to the desired transmitter quickly and easily at the press of a button in order to reproduce your content
- Supports sharing from a mobile device (smartphone/tablet) via the OS of the mobile device, no app is required
- Supports Windows, iOS, iPad, Android
- Supports resolutions up to Full HD (1080p / 60 Hz)
- Easy operation and handling thanks to Plug & Play – Just plug in and get started
- The transmitter and receiver can be supplied with power via your device's HDMI connection (> 500 mA required) To have a safe and stable operation, we recommend to use always the Micro USB cable for the power supply of TX and RX

Package Content

- 1x Transmitter unit
- 1x Receiver unit
- 1x Wifi / Power cable (75 cm) for RX
- 1x Micro USB cable (80 cm) for TX
- 2x HDMI extension cable (15 cm)
- 1x QIG

Product Features

Features	Description
Plug and play	Simply connect the transmitter with the PC HDMI ports and connect the receiver with the screen, the transmitter and receiver will connect automatically
App Free	The Wireless Presentation System Set doesn't need any software or app installation, no setup, no IT team
All in one	Supports also Blu-ray / DVD player, media player and any device with HDMI jack
Auto Channel Selection	The Wireless Presentation System Set will select the best Wi-Fi channel automatically after power on to ensure streaming smoothly
Fast Speed with 5G AC MIMO Technology	The Wireless Presentation System Set comes with the fast 802.11ac MIMO technology which increases Wi-Fi speeds by allowing a pair of wireless devices to simultaneously send or receive multiple data streams
1080p60 High Video Quality	The Wireless Presentation System Set supports 1080p resolution, which means much more clear

pictures, rich in details and

texture compared with 720p.

No worries about the data security, the Wireless Presentation System Set supports AES 128-bit security encryption and WPA2/WPA-PSK/WPA2-PSK

High Security Protection

authentication protocol to protect data. HDCP is supported

to protect the content

Product Specification

Feature

	1920×1080 (1080p60/50/30/25/24 1080i60/50)
Video Input	1280×720 (720p60/50) 720×576 (576p50) 720×480 (480p60)
Video output	Up to 1080p / 60Hz
Audio	Stereo, quality 16bits 48KHz
Wireless Channel	IEEE 802.11ac, 5GHz, 2T2R
Latency	Around 120ms latency
HDMI Version	HDMI 1.4 with HDCP1.3
Authentication Protocol	WPA2 (WPAS-PSK / WPA2-Enterprise)
Security Platform supported	AES 128 bit Windows, macOS, iOS, Android
Distance	About 50 meters in the clear line of sight

Transmitter

Interface	HDMI in jack x 1, Micro USB x 1, button x 1
LED	Red and Blue
Switch Button	1 x
Power Supply	DC5V/0.5A
Power Consumption	About 2,5 W
Dimension	83 x 32 x 13mm
Weight	27.1 g

Receiver

Interface	HDMI out jack x 1, Micro USB x 1, button x 1
LED	Red and Blue
Power Supply	DC5V/0.5A
Power Consumption	About 2.5W
Dimension	83 x 32 x 13mm
Weight	27.1 g

Temperature Range


Operating	0°C to +40°C (+32°F to +104°F)
Storage	-10°C to +60°C (+14°F to +140°F)

Humidity

Operating	10% to 80% relative humidity
-----------	------------------------------

Overview

Transmitter Unit

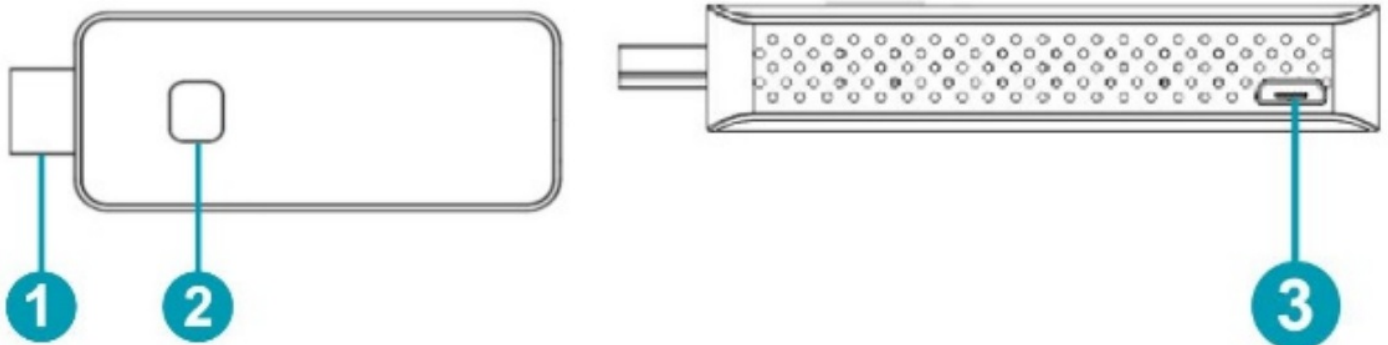


- 1. HDMI in** Connect source devices, like with a computer or other devices with HDMI, the HDMI in also supports 5V power if the source devices has HDMI with a 5V output
Short press: start to cast
- 2. Button** Long press: long press up to 10 seconds for factory reset
- 2. LED** To display different statue
- 3. Micro USB** For power supply

Remark: if the source device has a HDMI with 5V power output, then there is no need to connect an USB cable for power.

LED indicator of the

Transmitter Unit	Description
Static red	Transmitter Unit system is booting on
Flashing red	Transmitter Unit is searching for Receiver Unit
Flashing blue	Waiting for connection
Static blue	Connected and started to present
Purple	No HDMI in

Receiver Unit

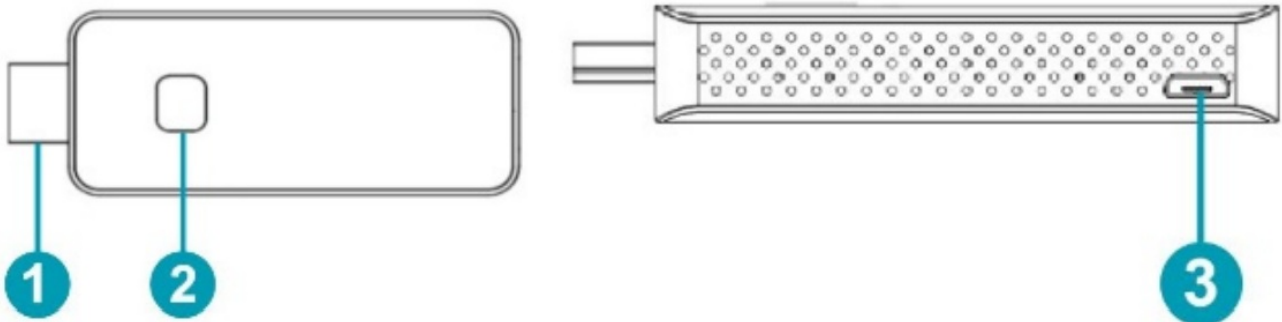

1. HDMI out Connect with monitor
or
projector

2. Button: Press 10 seconds
for factory
reset

2. LED To display different
status

3. Micro USB For power supply

**LED indicator of
the**

Description

Receiver Unit


Flashing blue	Waiting for connection
	Connected and started to
Static blue	present

Installation

Receiver Installation



1. Connect with TV or projector

- Connect the Receiver HDMI Unit with the big screen TV or projectors HDMI jack
- Connect the Micro USB port of the Receiver to the USB port of the TV through the Wifi USB connection/power supply cable.

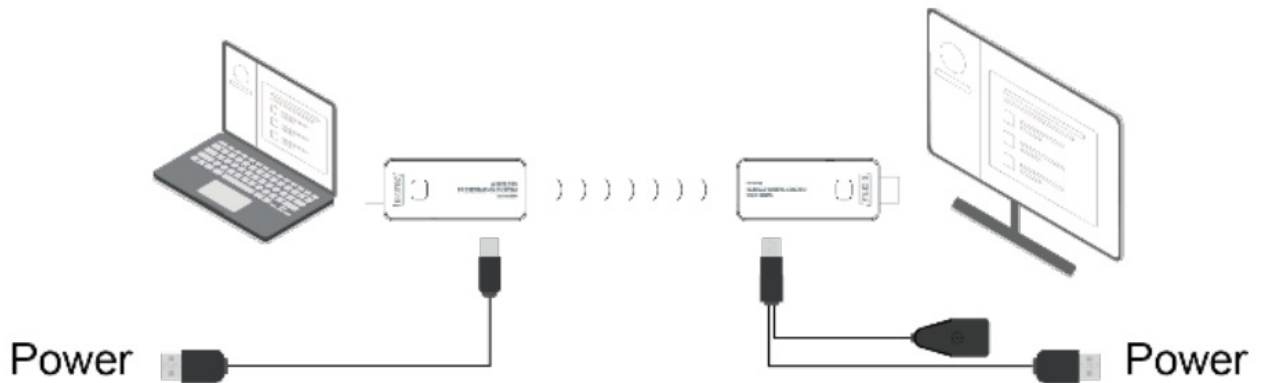


2. Connect to Internet

- Connect the Receiver SSID with your smart devices, the SSID and password are shown on the left upper corner of the screen

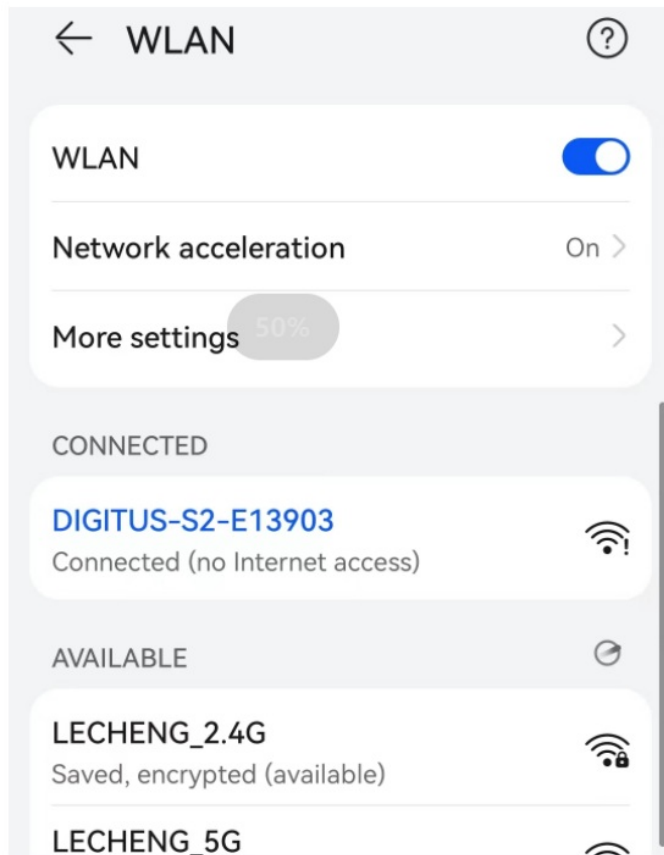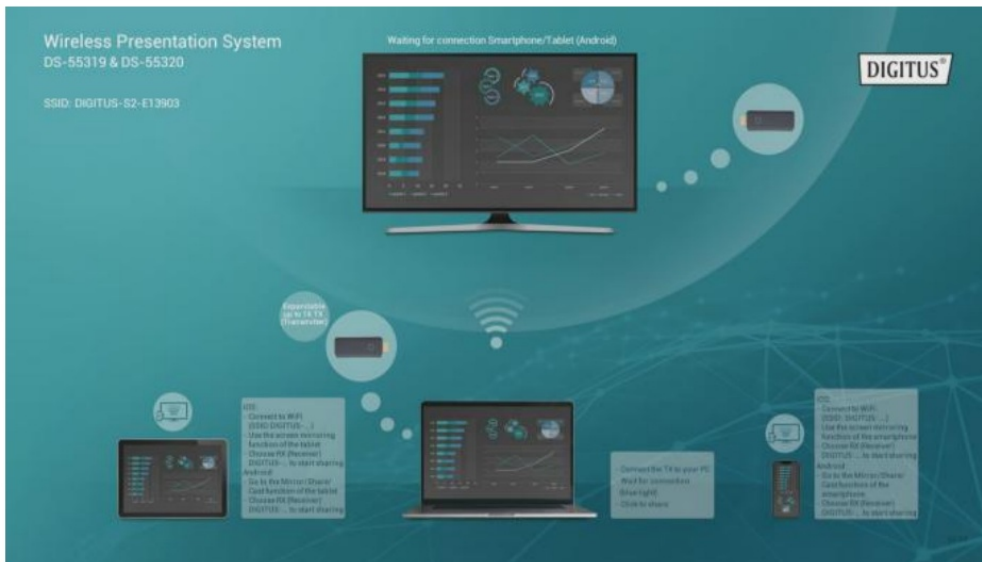


- Open the browser with your phone, and input the IP address which shows on the left upper corner of the screen to enter to the Receivers management platform

Remark: when connect to the router, the IP address will be updated accordingly

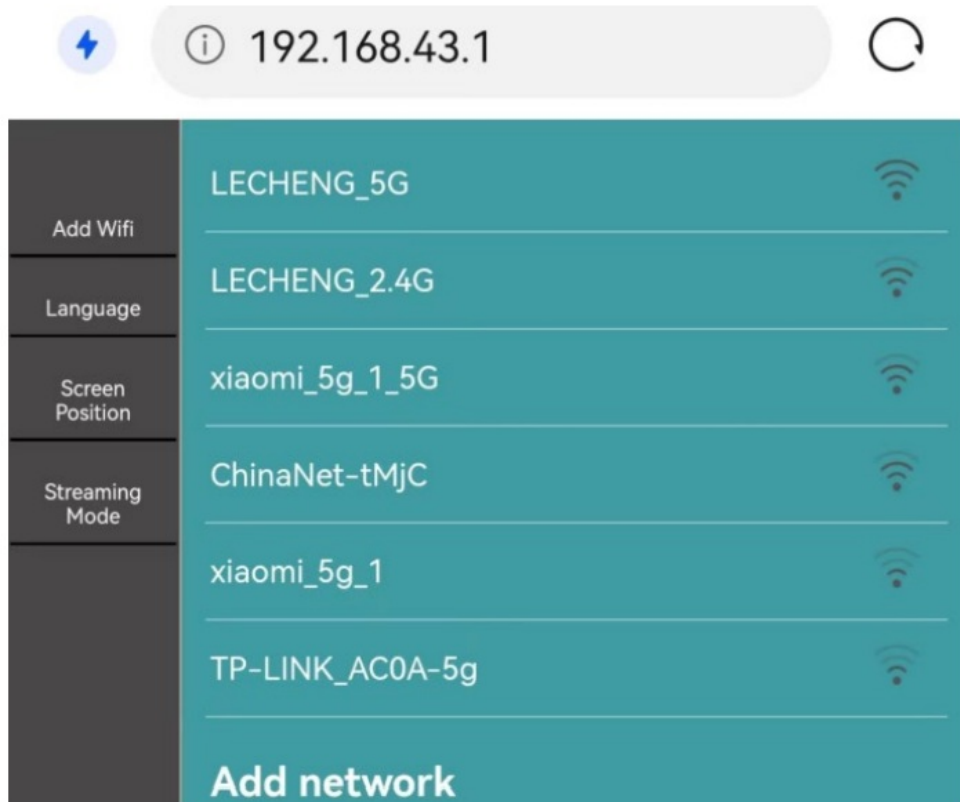


- Select the network and connect in the management platform, the Receiver Unit will link to the network and show the network SSID on the middle of the screen (to get a better performance, we recommend connecting with 5G router) The platform will list all your wireless router SSID, select the SSID from the wireless router and enter the password. The Receiver Unit will link to the network and show the network SSID on the middle of the receiver screen (to get a better performance, we recommend

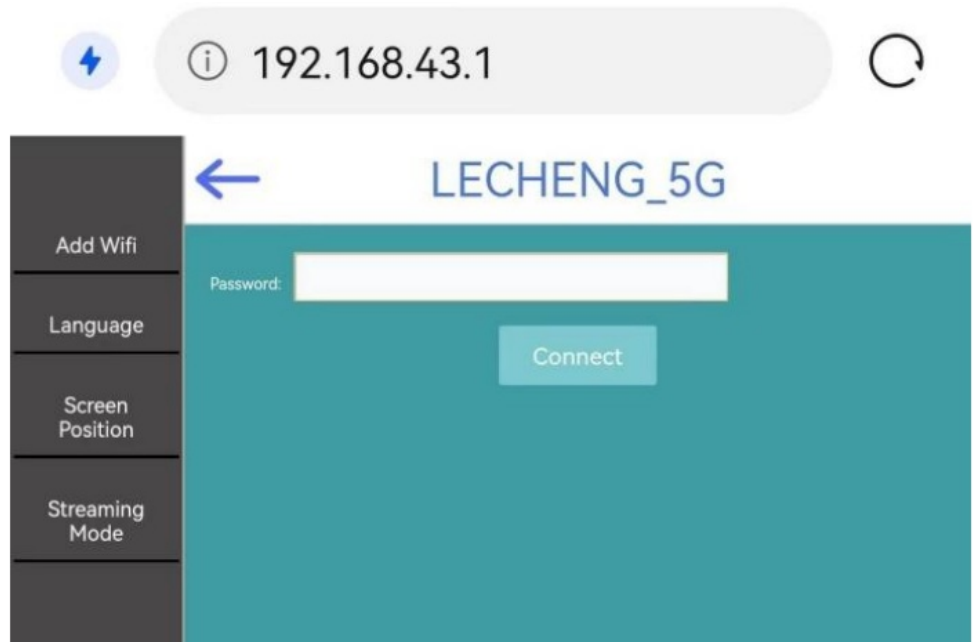

connecting with 5G router)


3. Language

- User can change language in the management page

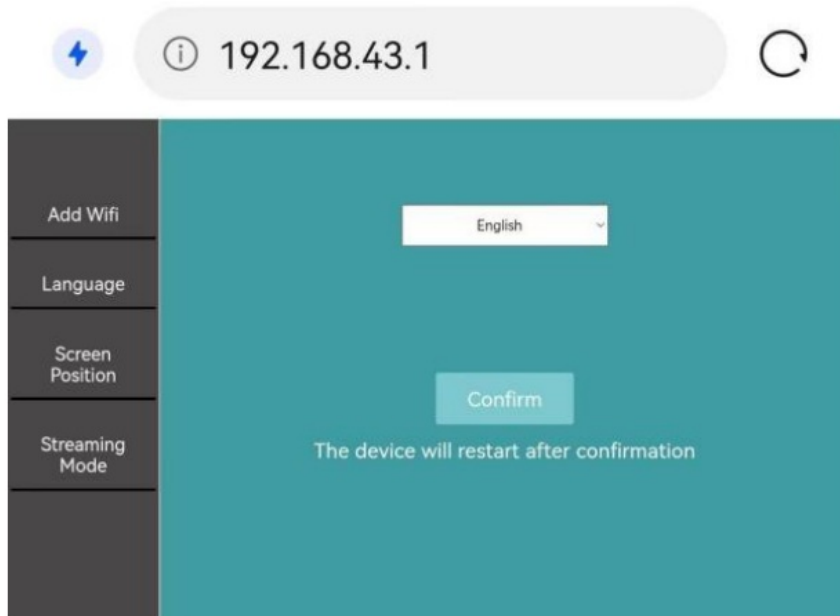

4. Screen Position


- If the Receiver HDMI out size is not compatible with the display, user can use Screen Position to adjust the zoom in and zoom

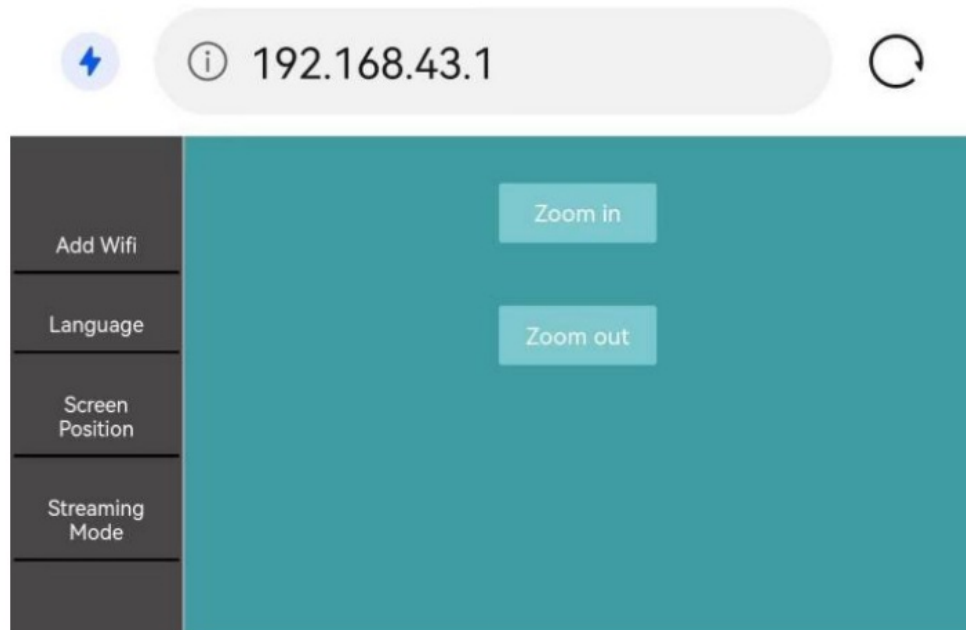

out of the screen

5. Streaming mode

- You can select to use streaming or mirror mode

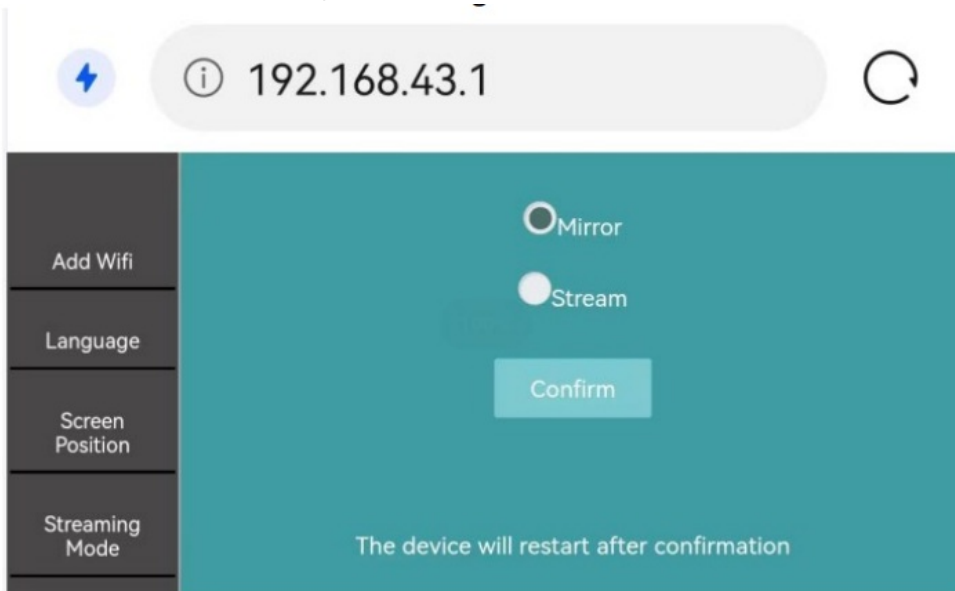

Transmitter Installation

1. Connect the Transmitters HDMI Unit to PC HDMI port Remark: If the source device HDMI has a 5V power output, then there is no need to connect a USB cable for power. If not, please connect the Transmitter with PC by USB cable for power.
2. The LED indicator of the Transmitter will turn red when it's booting up.
3. The LED indicator will become blue and flashing when it is ready to stream
4. Click the button to start casting, the LED indicator will become constant blue

Pairing Transmitter and Receiver

A set of the Wireless HDMI Extender Set includes one receiver and one transmitter, which are paired before shipment. Normally you don't need to pair them again. However, if you buy an additional transmitter, you need to follow the instruction below to pair the new transmitter with the receiver.

1. Power on receiver and connect with display
2. Power on the transmitter till the LED turn to flash red, then press the button up to 5 seconds till the LED become fast flashing red, this means the transmitter unit is in factory reset mode.
3. Wait around 15 seconds, the button light of the Transmitter will turn to constant blue from the red light, and the pair successful message will be displayed on the Receiver Unit screen

Streaming

Streaming from Transmitter

1. Connect the Transmitter HDMI Unit to a PC HDMI port
Remark: if the source devices HDMI with 5V power output, then there is no need to connect a USB cable for power, if not, please connect the Transmitter Unit with PC by USB cable for power. To have a safe and stable operation, we recommend to use always the Micro USB cable for power supply of TX and RX
2. The LED indicator of the Transmitter will turn red when it's booting up
3. The LED indicator will become blue and flashing when it is ready to stream
4. Click the button to start casting, the LED indicator will become constant blue

Streaming from smart devices (smartphone/tablet)

Remark: If a HDMI Transmitter (TX) is connected with the HDMI Receiver (RX), please unpair/disconnect the TX and the RX by press the button on TX first, start screen will be shown. Then you can connect a mobile device. Priority is HDMI Transmitter (TX) before mobile device (smartphone/tablet). When a mobile device is connected and you want to switch to HDMI transmitter, just press the button on TX to share. You don't need to disconnect mobile device first.


IOS Devices:

- Search RX (Receiver) SSID and connect in Wifi settings. (SSID: DIGITUS..., Password: 12345678), the is SSID shown on the left upper corner of the RX start screen
- Use the screen mirroring function of the smartphone
- Choose RX (Receiver) DIGITUS-... to start sharing



Android devices:

- Make sure the Wi-Fi of your android device is activated/available
- Go to the Mirror/Share/Cast function of the smartphone
- Choose RX (Receiver) DIGITUS-... to start sharing

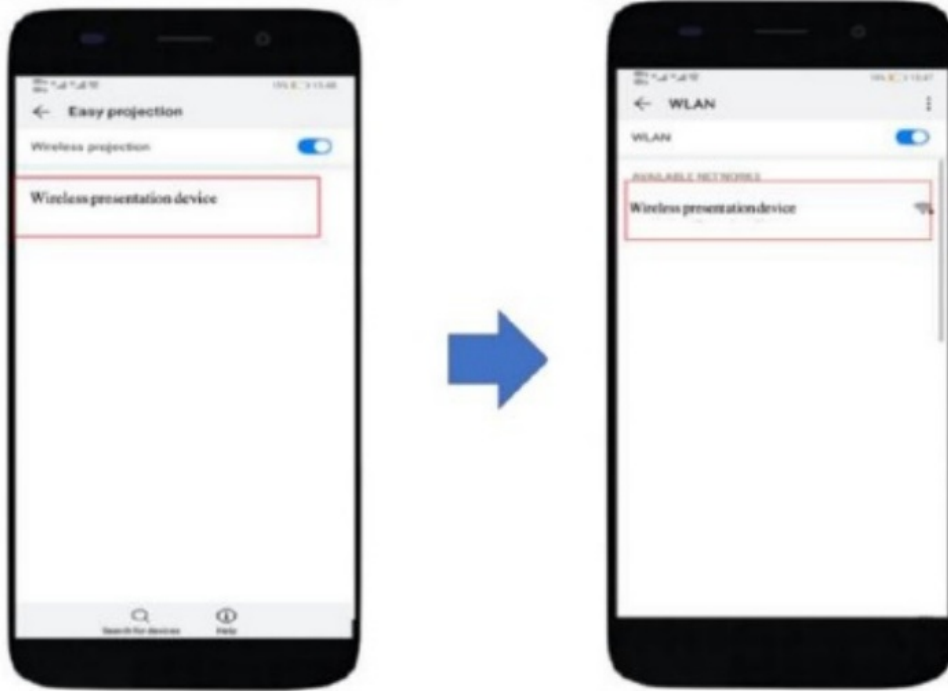

Remark: there are different names on different brands of phones or tablets: WIFI Display, WLAN Display, Wireless Display, Allshare Display, Allshare Cast, Wireless Display, MirriorShare, etc.

Frequency Range & Maximum Transmit Power

- **WiFi Standard:** 802.11b/g/n/ac 5G WiFi
- **Channel:** 36, 40
- **Core Frequency:** 5180, 5200
- **Range:** 5170 ~5 210MHz
- **Bandwidth:** 20/40MHz
- **Transmitter power:** 13 dBm max
- **SW version:** RX: 2.69, TX: 2.3.9
- **HW version:**
 - **TX:** S100TX-LC01-01
 - **RX:** S100RX-LC01-01

Important safety instructions

Please read the following safety instructions carefully before installation and operation:

1. Observe all warnings and instructions concerning this device
2. Do not expose the device to rain, moisture, vapors or liquids
3. Do not insert any objects into the device
4. Do not attempt to repair the unit yourself or open the cabinet. Risk of electric shock!
5. Ensure adequate ventilation to prevent damage due to overheating
6. Turn off the power supply and make sure the environment is safe before installation
7. In the event of thunderstorms, there is a risk of lightning strikes and damage to connected electrical equipment due to overvoltage
8. Do not install this device during a thunderstorm
9. Disconnect the device from the connected electrical appliances during a thunderstorm
10. Use the device inside buildings only
11. Return the device to your dealer in case of repair
12. Dust, moisture, vapors, and strong cleaning agents or solvents can damage the device
13. Disconnect the device from the power supply and the connected devices before cleaning
14. Clean the device with a lint-free cloth

Disclaimer

The terms HDMI and HDMI High-Definition Multimedia interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. Hereby ASSMANN Electronic GmbH declares that the Declaration of Conformity is part of the shipping content. If the Declaration of Conformity is missing, you can request it by post under the below-mentioned manufacturer address. www.assmann.com Assmann Electronic GmbH Auf dem Schüffel 3 58513 Lüdenscheid Germany

Documents / Resources



[DIGITUS DS-55319 Click and Present Mini Wireless Presentation System](#) [pdf] User Manual
DS-55319, Click and Present Mini Wireless Presentation System, DS-55319 Click and Present Mini Wireless Presentation System, Mini Wireless Presentation System, Wireless Presentation System, Presentation System

Related Manuals / Resources

[DirecTV C41W Wireless Genie Mini Manual](#)

Download: DirecTV C41W Wireless Genie Mini Manual PDF

[EPSON ELPWP10 Wireless Presentation System User Guide](#)



EPSON ELPWP10 Wireless Presentation System User Guide Pairing Projecting About This Guide This guide explains how to use...

[MPOW Mini Wireless Earbuds User Guide](#)

• DREAM • EXPLORE • INSPIRE MPOW EM16 MINI WIRELESS HEADSET MPOW AUDIO WIRELESS Pair Mode 1: Auto...

[Trust MYDO Wireless Silent Click Mouse User Guide](#)

MYDO WIRELESS SILENT CLICK MOUSE User Guide FAQ WWW.TRUST.COM/21869/FAQ Trust International BV - Laan van Barcelona 600 -...

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

Save my name, email, and website in this browser for the next time I comment.

[Manuals+](#)

- [home](#)
- [privacy](#)