



## DIGITUS DS-55319 Wireless HDMI Transmitter additional transmitter unit Instruction Manual

[Home](#) » [DIGITUS](#) » DIGITUS DS-55319 Wireless HDMI Transmitter additional transmitter unit Instruction Manual



### DS-55319 Wireless HDMI Transmitter additional transmitter unit Instruction Manual



## Contents

- [1 Introduction](#)
- [2 Main Features](#)
- [3 Package Content](#)
- [4 Product Features](#)
- [5 Product Specification](#)
- [6 Overview](#)
  - [6.1 Transmitter Unit](#)
- [7 Streaming](#)
  - [7.1 Streaming from Transmitter](#)
- [8 Pairing Transmitter and Receiver](#)
- [9 Frequency Range & Maximum Transmitt Power](#)
- [10 Important safety instructions](#)
- [11 Documents / Resources](#)
  - [11.1 References](#)
- [12 Related Posts](#)

## Introduction

With the Wireless Presentation System, you can wirelessly transmit HDMI video and audio signals in Full HD over a distance of up to 50 m with an unobstructed view. Operation and installation are super simple. Real Plug & Play – Just plug in and get started. With additional transmitters (DS-55320), the set can be extended to up to 16 transmitter units (total). Switch to the desired transmitter quickly and easily at the press of a button in order to reproduce your content. You can also share content directly from your mobile device (smartphone/tablet) using your device's OS directly, no additional app is required. The transmitter and receiver can be supplied with power via your device's HDMI connection (0.5A required), or alternatively (additionally) with the enclosed micro USB cable via the USB connection of your notebook, PC, etc. Thanks to the compact design of the transmitter and receiver, installation is easy, quick, and can be customized – the perfect solution for meeting and conference rooms.

## Main Features

- Wireless HDMI signal transmission up to 50 m (with an unobstructed view)
- With this transmitter unit, extend the Wireless Presentation System (DS-55319) to up to 16 transmitters
- Switch to the desired transmitter quickly and easily at the press of a button in order to reproduce your content
- Supports resolutions up to Full HD (1080p / 60 Hz)
- Easy operation and handling thanks to Plug & Play – Just plug in and get started
- Transmitter and receiver can be supplied with power via your device's HDMI connection (> 500 mA required)

## Package Content

- 1x Transmitter unit
- 1x Micro USB cable (80 cm)
- 1x HDMI extension cable (15 cm)
- 1x QIG

## Product Features

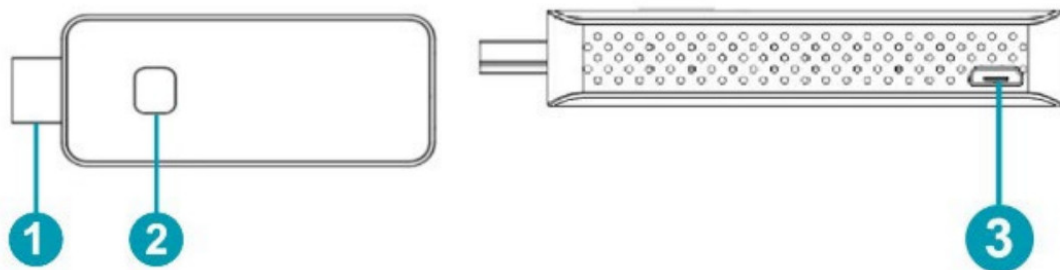
Features	Description
Plug and play	Simply connect the transmitter with the PC HDMI ports and connect the receiver with the screen, the transmitter and receiver will connect automatically
App Free	DS-55320 doesn't need any software or app installation, no setup, no IT team
All in one	Supports also Blu-ray / DVD player, media player, and any device with an HDMI jack
Multi-user mode	Up to 16 user's presentations at one time
Auto Channel Selection	The Wireless HDMI Transmitter will select the best Wi-Fi channel automatically after powering on to ensure streaming smoothly
Fast Speed with 5G AC	The Wireless HDMI Transmitter
MIMO Technology	comes with the fast 802.11ac
	MIMO technology which increases Wi-Fi speeds by allowing a pair of wireless devices to simultaneously send or receive multiple data streams
1080p60 High Video Quality	DS-55320 supports 1080p resolution, which means many clear pictures, rich in details and texture compared with 720p.
High-Security Protection	No worries about the data security, the SmartShare mini supports AES 128-bit security encryption and WPA2/WPA-
	PSK/WPA2-PSK authentication protocol to protect data. HDCP is supported to protect the content

## Product Specification

Feature	
Video Input	1920×1080 (1080p60/50/30/25/24, 1080160/50) 1280×720 (720p60/50) 720×576 (576p50) 720×480 (480p60)
Video output	Up to Full HD, 1080p/60 Hz
Audio	Stereo, quality 16bits 48KHz
Wireless Channel	IEEE 802.11ac, 5GHz, 2T2R
Latency	Around 120ms latency
HDMI Version	HDMI 1.4 with HDCP1.3
Authentication Protocol	WPA2 (WPAS-PSK / WPA2-Enterprise)
Security	AES 128 bit
Platform supported	Windows, macOS
Distance	About 50 meters in the clear line of sight
Transmitter	
Interface	HDMI in jack x 1, micro USB x 1, button x 1
LED	Red and Blue
Switch Button	1 x
Power Supply	DCSV/O.SA
Power Consumption	About 2,5 W
Dimension	83 x 32 x 13mm
Weight	27.1 g
Temperature Range	
Operating	0°C to +40°C (+32°F to +104°F)
Storage	-10°C to +60°C (+14°F to +140°F)
Humidity	
Operating	10% to 80% relative humidity
Storage	5% to 90% relative humidity

## Overview

### Transmitter Unit



1. HDMI in	Connect source devices, like with a computer or other devices with HDMI, the HDMI in also supports 5V power if the source devices have HDMI with a 5V output
2. Button	Short press: start to cast Long press: long press up to 10 seconds for factory reset
2. LED	To display the different status
3. Micro USB	For power supply

**Remark:** if the source device has an HDMI with 5V/0.5A power output, then there is no need to connect a USB cable for power.

LED indicator of the Transmitter Unit	Description
Static red	The transmitter Unit system is booting on
Flashing red	The transmitter is searching for Receiver
Flashing blue	Waiting for connection
Static blue	Connected and started to present
Purple	No HDMI in

## Streaming

### Streaming from Transmitter

1. Connect the Transmitter HDMI Unit to a PC HDMI port

Remark: if the source devices HDMI with 5V power output, then there is no need to connect a USB cable for power, if not, please connect the Transmitter Unit with PC by USB cable for power.

To have a safe and stable operation, we recommend using always the Micro USB cable for the power supply of TX and RX

2. The LED indicator of the Transmitter will turn red when it's booting up
3. The LED indicator will become blue and flash when it is ready to stream
4. Click the button to start casting, the LED indicator will become constant blue

### Pairing Transmitter and Receiver

The set DS-55319 includes one receiver and one transmitter, which are paired before shipment. Normally you

don't need to pair them again.

However, if you buy an additional transmitter (DS-55320) or need to repair it, you need to follow the instruction below to pair the new transmitter with the receiver.

1. Power on receiver and connect with display
2. Power on the transmitter till the LED turn to flash red, then press the button for up to 5 seconds till the LED becomes fast flashing red, this means the transmitter unit is in factory reset mode.
3. Wait around 15 seconds, and the button light of the Transmitter Unit will turn to constant blue from the red light, and the pair successful message will be displayed on the Receiver Unit screen.

## **Frequency Range & Maximum Transmit Power**

WiFi Standard: 802.11b/g/n/ac 5G WiFi

Channel: 36, 40

Core Frequency: 5180, 5200

Range: 5170 ~ 5210MHz

Bandwidth: 20/40MHz

Transmitter power: 13 dBm max

SW version: TX: 2.3.9

HW version: S100TX-LC01-01

## **Important safety instructions**

Please read the following safety instructions carefully before installation and operation:

1. Observe all warnings and instructions concerning this device
2. Do not expose the device to rain, moisture, vapors or liquids
3. Do not insert any objects into the device
4. Do not attempt to repair the unit yourself or open the cabinet.  
Risk of electric shock!
5. Ensure adequate ventilation to prevent damage due to overheating
6. Turn off the power supply and make sure the environment is safe before installation
7. In the event of thunderstorms, there is a risk of a lightning strike and damage to connected electrical equipment due to overvoltage
8. Do not install this device during a thunderstorm
9. Disconnect the device from the connected electrical appliances during a thunderstorm
10. Use the device inside buildings only
11. Return the device to your dealer in case of repair
12. Dust, moisture, vapors, and strong cleaning agents or solvents can damage the device
13. Disconnect the device from the power supply and the connected devices before cleaning
14. Clean the device with a lint-free cloth

## **Disclaimer**





The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.

Hereby ASSMANN Electronic GmbH declares that the Declaration of Conformity is part of the shipping content. If the Declaration of Conformity is missing, you can request it by post under the below-mentioned manufacturer address.

[www.assmann.com](http://www.assmann.com)  
Assmann Electronic GmbH  
Auf dem Schüffel 3  
58513 Lüdenscheid, Germany



Documents / Resources

<div> Wireless HDMI Transmitter (additional transmitter unit for DS-55319)  Quick Installation Guide DS-55320</div>	<p><a href="#">DIGITUS DS-55319 Wireless HDMI Transmitter (additional transmitter unit</a> [pdf] Instruction Manual DS-55319, DS-55320, Wireless HDMI Transmitter, additional transmitter unit</p>
<div> Wireless HDMI Transmitter (additional transmitter unit for DS-55319)  Quick Installation Guide DS-55320</div>	<p><a href="#">DIGITUS DS-55319 Wireless HDMI Transmitter</a> [pdf] Installation Guide DS-55319, Wireless HDMI Transmitter, DS-55319 Wireless HDMI Transmitter, HDMI Transmitter, Transmitter</p>

References

-  [ASSMANN Electronic GmbH | Germany](#)