



displaypros 03 MODify Single Sided Kit Instruction Manual

[Home](#) » [displaypros](#) » displaypros 03 MODify Single Sided Kit Instruction Manual 

displaypros 03 MODify Single Sided Kit



Contents

1 MODify Single Sided Kit 03

1.1 INTRODUCTION

1.2 features and benefits:

1.3 dimensions:

2 MODify Accessories

2.1 Slotwall Accessories

2.2 How to Apply & Remove Graphics

3 SETUP INSTRUCTIONS

4 Kit Hardware BOM

5 Kit Graphics BOM

6 Documents / Resources

6.1 References

MODify Single Sided Kit 03

INTRODUCTION

MODify™ is a one-of-a-kind Modular Merchandising System that is made up of interchangeable fixtures and accessories that can be easily assembled, disassembled, and rearranged to create a variety of different display configurations. The MODify system incorporates SEG push-fit fabric graphics that enable you to brand, promote and merchandise with ease.

MODify Single Sided Kit 03 features two slatwall panels (right/left) and one center graphic panel. Customize your kit with fixtures such as shelves, waterfalls and hooks, or furniture like tables and risers. The center SEG push-fit graphic panel can be effortlessly replaced at any time, allowing you to keep your display up-to-date and on-trend.

features and benefits:








Base Kit includes:

- Frame, slatwall, shelf and base colors in kit are all the same, your choice of all white, black, or silver
- Heavy-duty aluminum frame, steel base
- Steel, slotted uprights
- Left & right 35"W x 96"H slatwall panels
- Center graphic panel 35"W x 96"H
- Non-rolling base
- Display is easy to assemble and install
- Lifetime hardware warranty against manufacturer defects

Optional Accessories Include:

- Towel bars.
- U bars
- Faceout bars
- Slatwall hooks
- Waterfalls
- Shelves

dimensions:

Hardware	Shipping
<p>Assembled unit:</p> <p>110"W x 96"H x 20"D</p> <p>2794mm(w) x 2438.4mm(h) x 520.7mm(d)</p> <p>Approximate Weight: 226 lbs / 102.512 kg</p>	<p>Packing case(s):</p> <p>1 Box</p> <p>Shipping dimensions:</p> <p>(72"L x 20"H x 24"D)</p> <p>1828.8mm(l) x 508mm(h) x 609.6mm(d)</p> <p>Approximate shipping weight: 282 lbs / 127.913 kg</p>
	<p>additional information:</p>
Graphics	<p>Powder coat color options:</p> <div></div> <p>white black silver</p> <p>Wood laminate color options:</p> <div></div> <p>white black natural gray</p>
<p>Graphic material: Dye-sublimated fabric See graphic templates for graphic sizes.</p> <p>Refer to related graphic templates for more information Visit:</p> <p>https://www.theexhibitorshandbook.com/</p>	

MODify Accessories


All Accessories available in white, black, or silver

Slotwall Accessories

- MFY-SLT-HK 4", 6", 8", 10" & 12"



- MFY-SLT-FC 6", 8", 10" & 12"

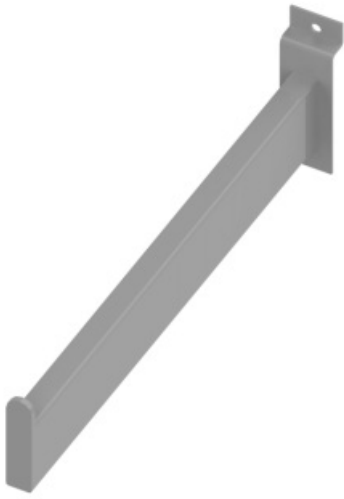


- MFY-SLT-WTR-16-7




U-Bar Accessories

- MFY-TWL-FC 6", 8" & 10"

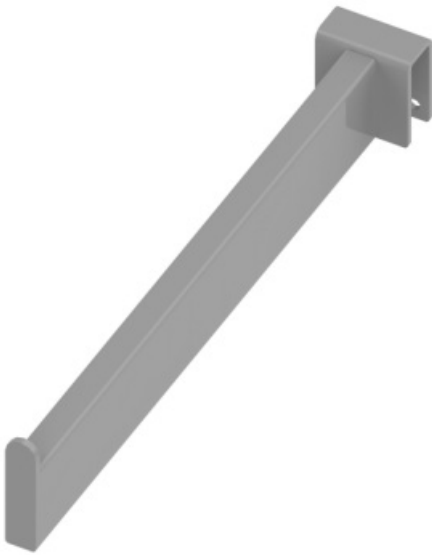


- MFY-UBR-FC 6", 8" & 10"

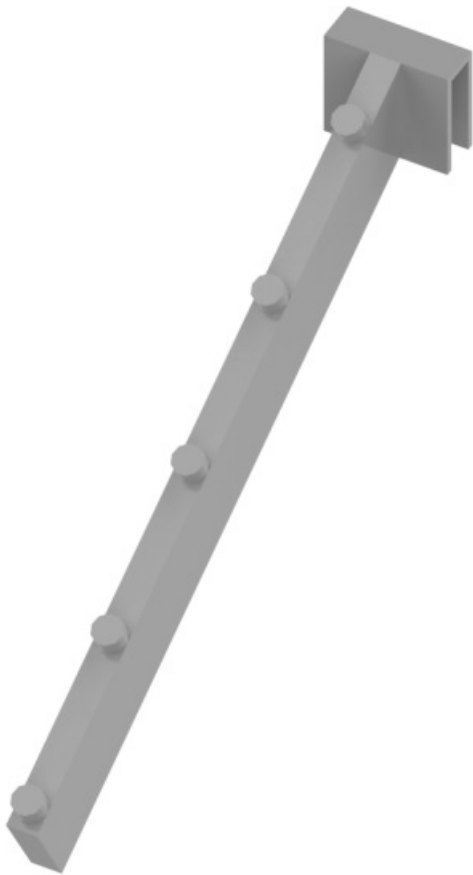


Shelf and Hanger Bars

- MFY-36-12-SHELF

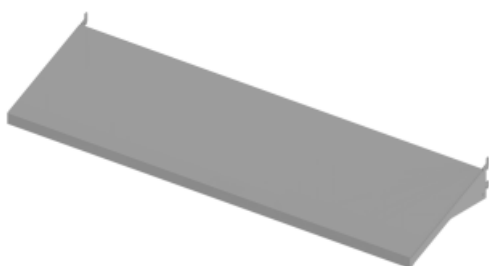

- MFY-SLF-36-12-HB

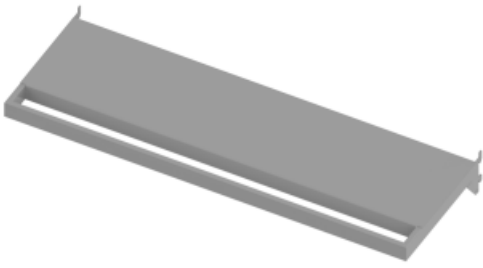


- MFY-SLT-TWL-36-3



- MFY-UBR-36-12




- MFY-DB-36-17

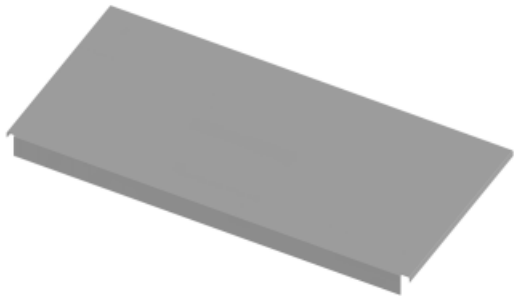


How to Apply & Remove Graphics

Installation and removal of SEG graphics is easy!


Installation: Push the SEG bead into each corner of the frame (1-4) with your thumb, then push the SEG bead into the middle of the run (5-8) and work your way around the perimeter of the frame until all beading is pushed in properly; if necessary, go around the perimeter again to ensure beading is secure in the extrusion profile.

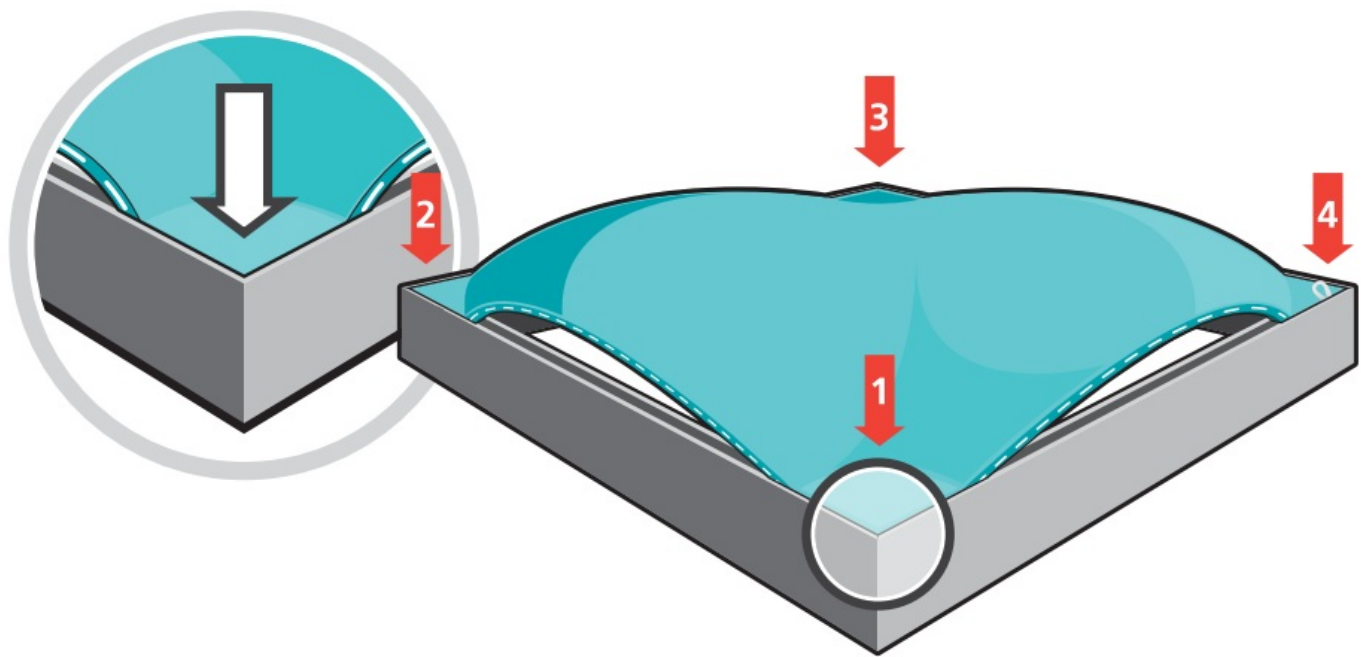

Note: Keep the set up area clean by using a drop cloth, washing hands before set-up or by wearing gloves.

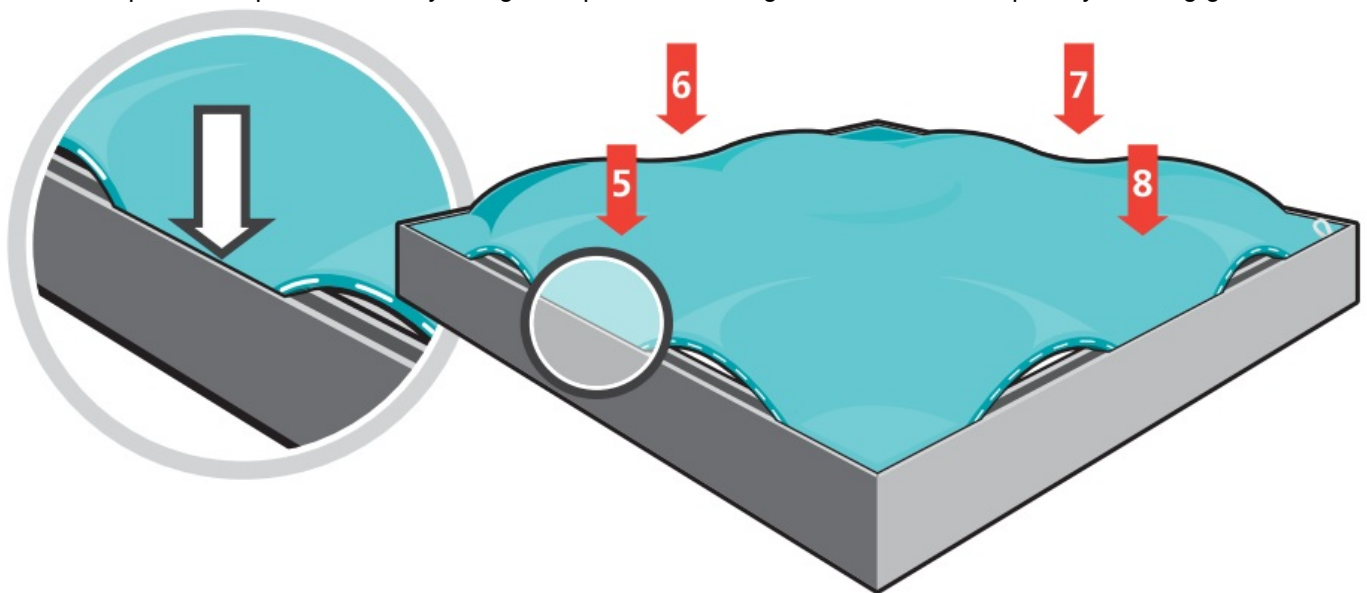



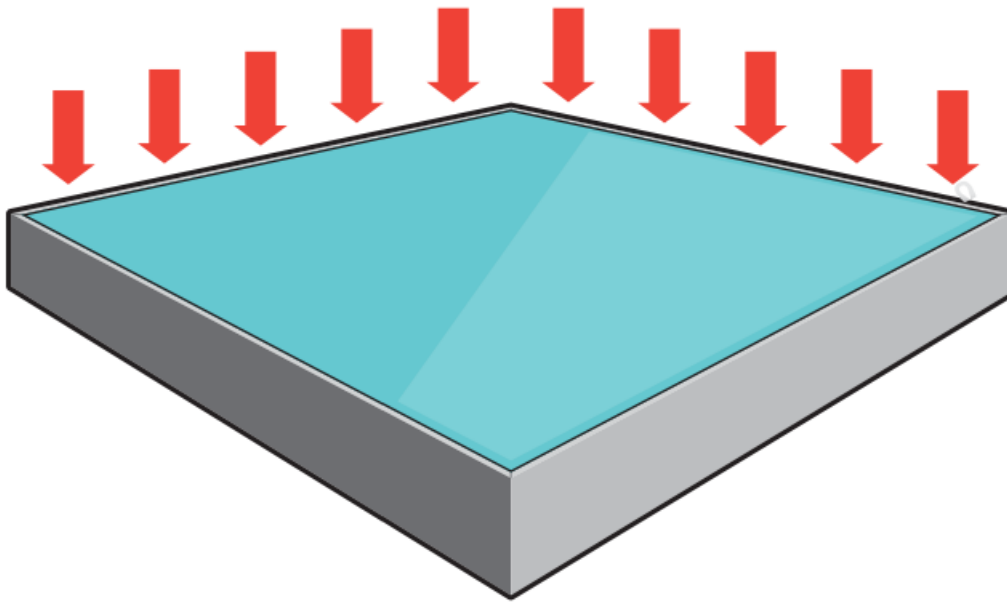



Removal: Use the pull tab located on the graphic and gently pull the graphic from the frame, going around the perimeter.





Graphics Storage & Care


Graphics should be folded with the graphic facing inward and stored in a zip lock /sealable plastic bag. Spot clean by wiping with a damp white cloth. If washing is necessary, use a commercial size front-loading washing machine, gentle cycle with cool water. Line dry flat. Dry cleaning is NOT recommended to prevent shrinkage.

SETUP INSTRUCTIONS


QTY	IMAGE	DESCRIPTION
4		3/8-16 x 2.5" L bolt
1		2350MM (92.52in) LEFT UPRIGHT
2		2350MM (92.52in) MIDDLE UPRIGHT
1		2350MM (92.52in) RIGHT UPRIGHT
4		2250MM (88.58in) OF SVC EXTRUSION
4		512MM (20.16in) SUPPORT LEG

MFY-BOLT-375-16-2.5



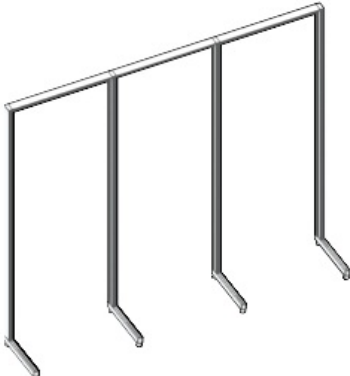


SETUP INSTRUCTIONS

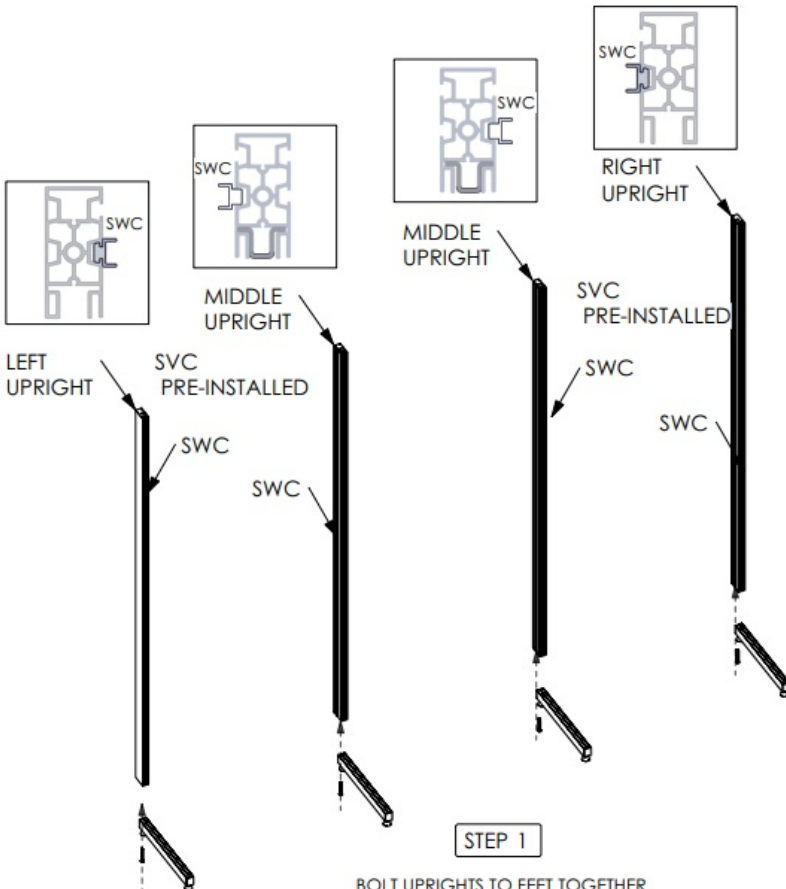

STEP 1

BOLT UPRIGHTS TO FEET TOGETHER

1

QTY	IMAGE	DESCRIPTION
2		883MM (34.76in) OF SWC EXTRUSION
3		883MM (34.76in) OF SINGLE SIDED SEG EXTRUSION - WITH CAM LOCKS BOTH ENDS
6		WALL BRACKET




CROSS BRACE SITS ON SUPPORT LEG




SWC PRE-INSTALLED
SLOT WALL TOP CHANNEL


SETUP INSTRUCTIONS




IMPORTANT!
MAKE A HALF TURN
TO LOCK EXTRUSIONS




WALL MOUNT CLIPS

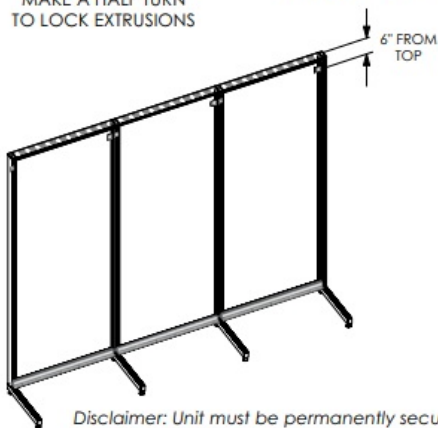

Disclaimer: Unit must be permanently secured and fastened to wall or other structure for stability.

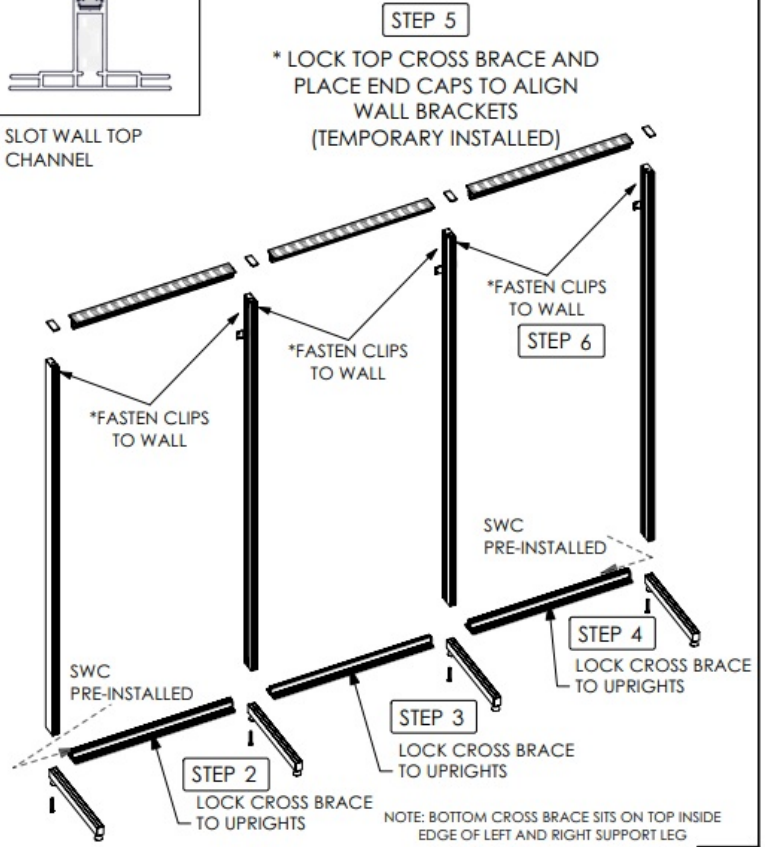

QTY	IMAGE	DESCRIPTION
2		883MM (34.76in) OF SINGLE SIDED SEG EXTRUSION -WITH CAM LOCKS BOTH ENDS
14		879MM (34.61in) LENGTH OF SLOTWALL EXTRUSION
1		879MM (34.61in) LENGTH OF SLOTWALL EXTRUSION -WITH 27.75MM BOTTOM CUT
1		883MM (34.76in) OF SWC EXTRUSION
1		7MM SEG PLASTIC END CAP FOR 830 EXTRUSION
1		7MM SEG PLASTIC END CAP FOR 831 EXTRUSION




LOOSEN END CAP TO ATTACH TOP CROSS BRACE

STEP 7

* REMOVE TOP CROSS BRACE AND END CAPS (TEMPORARY INSTALLED)

SETUP INSTRUCTIONS





STEP 8


SLOTWALL EXTRUSION STACK 005-879

STEP 9

LOCK CROSS BRACE TO UPRIGHTS AND PLACE END CAPS




SLOTWALL 005




SWC PRE-INSTALLED

SLOT WALL BOTTOM CHANNEL

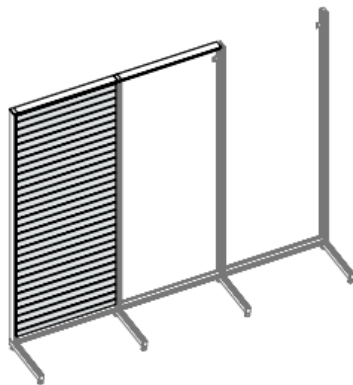






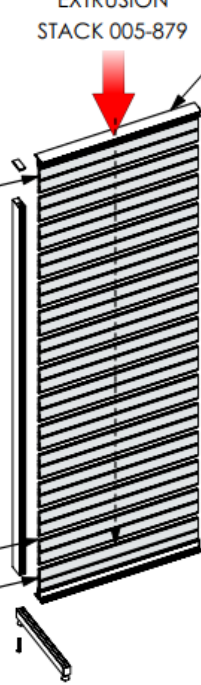

SLOTWALL

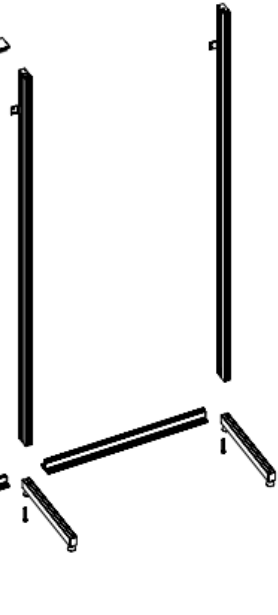
BOTTOM CUT SLOTWALL





SWC PRE-INSTALLED




14		879MM (34.61in) LENGTH OF SLOTWALL EXTRUSION
1		879MM (34.61in) LENGTH OF SLOTWALL EXTRUSION -WITH 27.75MM BOTTOM CUT
1		883MM (34.76in) OF SWC EXTRUSION
1		883MM (34.76in) OF SINGLE SIDED SEG EXTRUSION -WITH CAM LOCKS BOTH ENDS
1		7MM SEG PLASTIC END CAP FOR 831 EXTRUSION
1		7MM SEG PLASTIC END CAP FOR 830 EXTRUSION

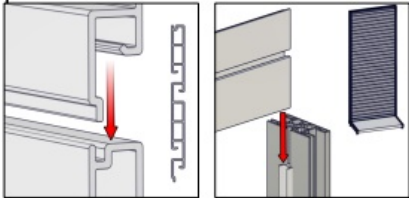

SLOTWALL 005

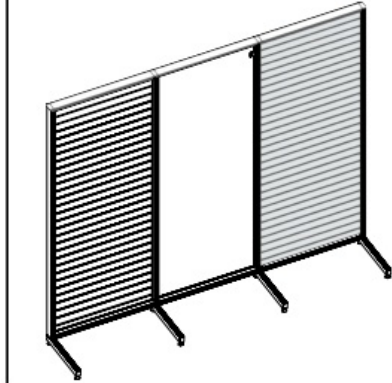


SLOT WALL BOTTOM CHANNEL



LOOSEN END CAP TO ATTACH TOP CROSS BRACE

SETUP INSTRUCTIONS






STEP 10


SLOTWALL EXTRUSION
STACK 005-879

STEP 11

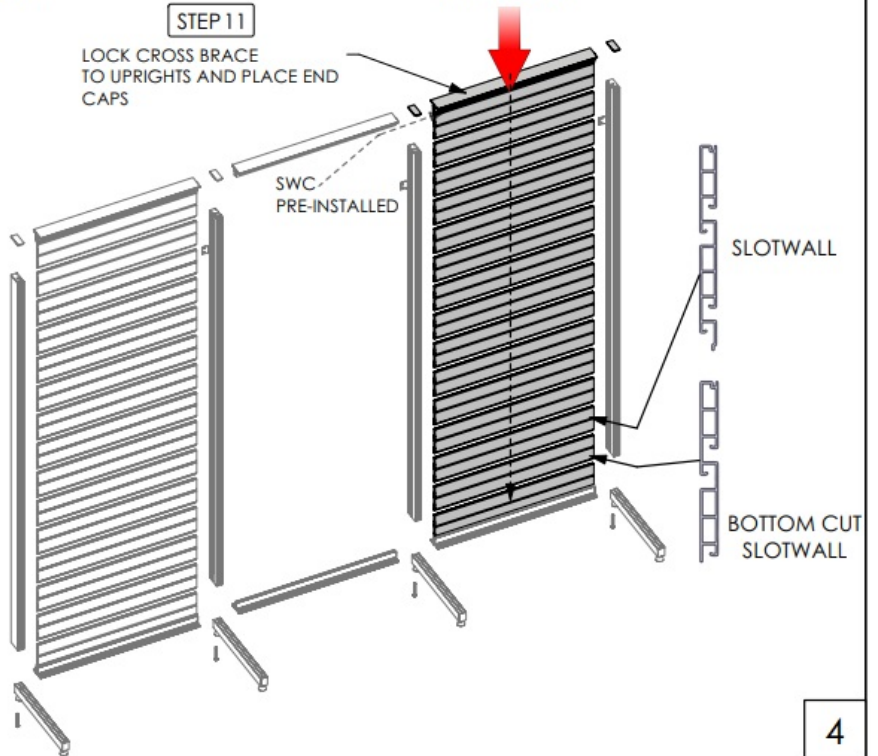
LOCK CROSS BRACE TO UPRIGHTS AND PLACE END CAPS





QTY	IMAGE	DESCRIPTION
3		36in WIDE X 17.25in DEEP - DROP-IN BASE PAN
1		(39.26 w X 96.61 h total size) 35.26 w X 92.61 h finish size, Dye-sub print on Eclipse Blockout Stretch, single sided, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner (WITH 1/4" NOTCH LEFT & RIGHT BOTTOM HORIZONTAL SIDE CORNERS)



THEN PRESS ALONG THE PERIMETER EDGE

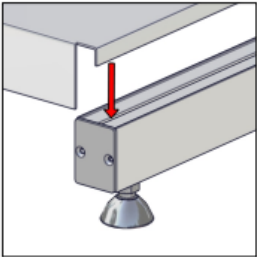



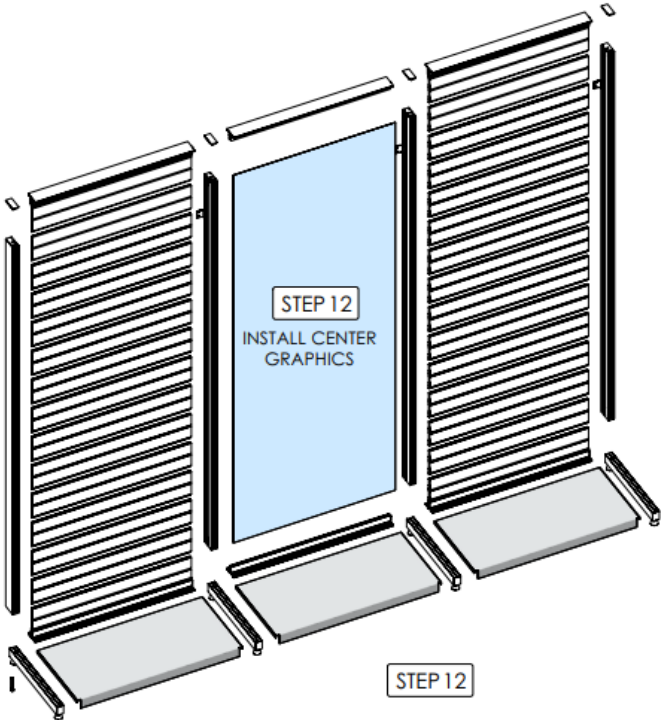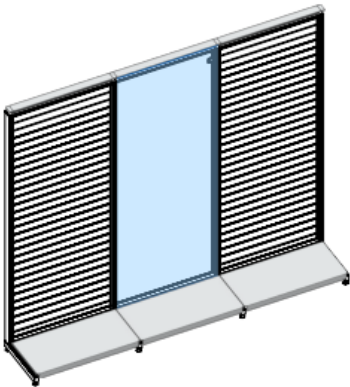











MFY-36-17-BASE-PAN




STEP 12
 PLACE BASE PAN IN GROOVE(FOOT)

Kit Hardware BOM

ITEM	COMPONENTS	QTY	DESCRIPTION
	004-883	4	883MM (34.76in) OF SWC EXTRUSION
	004-2250	4	2250MM (88.58in) OF SWC EXTRUSION
	005-879	28	879MM (34.61in) LENGTH OF SLOTWALL EXTRUSION
	005-879	2	879MM (34.61in) LENGTH OF SLOTWALL EXTRUSION -WITH 27.7 5MM BOTTOM CUT
	824-512	4	512MM (20.16IN) SUPPORT LEG

	830-2350	2	2350MM (92.52in) MIDDLE UPRIGHT
	830-EC	2	7MM SEG PLASTIC END CAP FOR 830 EXTRUSION
	831-2350	1	2350MM (92.52in) LEFT UPRIGHT
	831-2350	1	2350MM (92.52in) RIGHT UPRIGHT
	831-EC	2	7MM SEG PLASTIC END CAP FOR 831 EXTRUSION
	835-883-01-01	6	883MM (34.76in) OF SINGLE SIDED SEG EXTRUSION -WITH CAM LOCKS BOTH ENDS
	MFY-36-17-BASE-PAN	3	36in WIDE X 17.25in DEEP – DROP-IN BASE PAN
	MFY-BOLT-375-16-2.5	4	3/8-16 x 2.5"L bolt
	MFY-BRKT3	6	WALL BRACKET



Kit Graphics BOM

ITEM	COMPONENTS	QTY	DESCRIPTION
	MFY-SS-03-G	1	(39.26 w X 96.61 h total size) 35.26 w X 92.61 h finish size, Dye-sub print on Eclipse Blockout Stretch, single sided, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner (WITH 1/4" NOTCH LEFT & RIGHT BOTTOM HORIZONTAL SIDE CORNERS)

Documents / Resources

	displaypros 03 MODify Single Sided Kit [pdf] Instruction Manual MFY-SS-K-03, 03 MODify Single Sided Kit, MODify Single Sided Kit, Single Sided Kit, Sided Kit
---	--

References

-  [The Exhibitors' Handbook](#)
-  [Graphic Templates](#)