

displaypros 05 MODify Single Sided Kit Instruction Manual

Contents

1 MODify Single Sided Kit 05

1.1 features and benefits:

1.1.1 dimensions:

1.1.2 additional information:

2 MODify Accessories

2.1 Slotwall Accessories

2.2 U-Bar Accessories

2.3 Shelf and Hanger Bars

3 Tools Required

3.1 How to Apply & Remove Graphics

3.2 Graphics Storage & Care

3.2.1 SETUP INSTRUCTIONS

4 Kit Hardware BOM

5 Kit Graphics BOM

6 Documents / Resources

6.1 References

MODify Single Sided Kit 05

MODify™ is a one-of-a-kind Modular Merchandising System that is made up of interchangeable fixtures and accessories that can be easily assembled, disassembled, and rearranged to create a variety of different display configurations. The MODify system incorporates SEG push-fit fabric graphics that enable you to brand, promote and merchandise with ease.

MODify Single Sided Kit 05 combines one slatwall panel and one SEG push-fit graphic panel to create the ideal retail display. With this kit, you can showcase your products with ease by using fixtures like hooks, shelves, waterfalls, or faceout bars; add Ubars and towel bars too! Moreover, the kit allows for easy swapping of the graphic panel for seasonal changes, brand changes, product changes and promotions.



MODify Single Sided Kits should be mounted to a wall or structure for safety and stability.

We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications

features and benefits:

Base Kit includes:

- Frame, slatwall, shelf and base colors in kit are all the same, your choice of all white, black, or silver
- Heavy-duty aluminum frame, steel base
- Steel, slotted uprights
- One 35"W x 96"H slatwall panel
- One 35"W x 93"H SEG push-fit graphic panel
- Non-rolling base
- Display is easy to assemble and install
- Lifetime hardware warranty against manufacturer defects

Optional Accessories Include:

- | | |
|--------------------------|------------------|
| – Towel bars. | – U bars |
| – Faceout bars | – Slatwall hooks |
| – Waterfalls | – Shelves |
| – Nesting Tables 03 & 04 | |

dimensions:

Hardware

Assembled unit:

74"W x 96"H x 19"D
1879.6mm(w) x 2438.4mm(h) x 482.6mm(d)

Approximate Weight:
129 lbs / 58.5134 kg

Graphics

Graphic material: Dye-sublimated fabric

See graphic templates for graphic sizes.

Refer to related graphic templates for more information Visit:

<https://www.theexhibitorshandbook.com/downloads/download-graphic-templates> or click here

Shipping

Packing case(s):
1 Box

Shipping dimensions:
(96"L x 14"H x 24"D)
2438.4mm(l) x 355.6mm(h) x 609.6mm(d)

Approximate shipping weight:
188 lbs / 85.2754 kg

additional information:

Powder coat color options:



white

black

silver

Wood laminate color options:



white

black

natural


gray

6/1/2023

MODify Accessories

All Accessories available in white, black, or silver

Slotwall Accessories

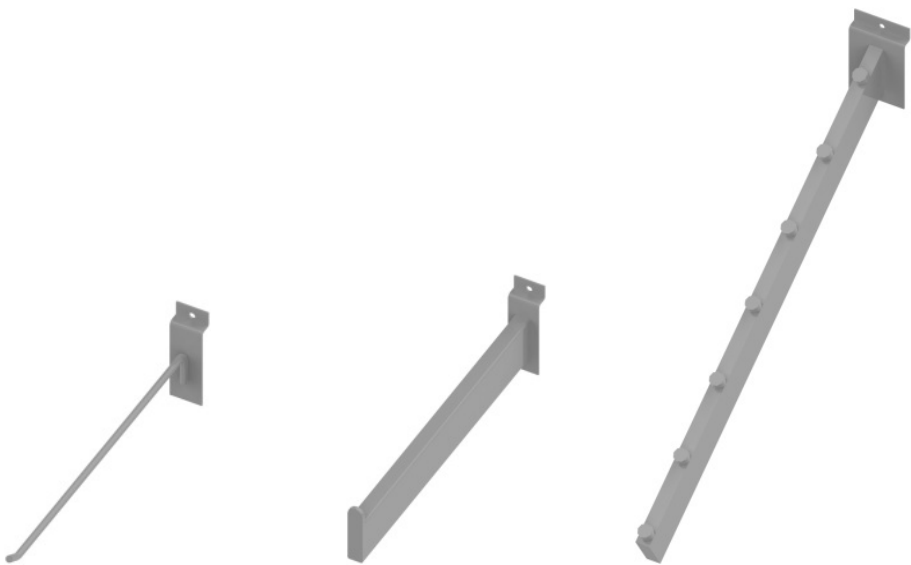

MFY-SLT-HK
4", 6", 8", 10" & 12"

MFY-SLT-FC
6", 8", 10" & 12"

MFY-SLT-WTR-16-7

U-Bar Accessories




MFY-TWL-FC
6", 8" & 10"




MFY-UBR-FC
6", 8" & 10"

Shelf and Hanger Bars

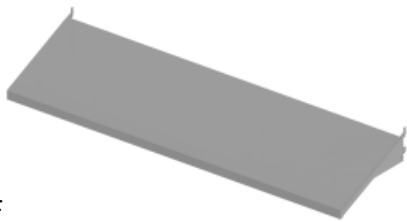

MFY-36-12-SHELF

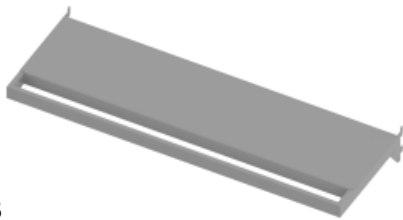


MFY-SLF-36-12-HB



MFY-SLT-TWL-36-3



MFY-UBR-36-12

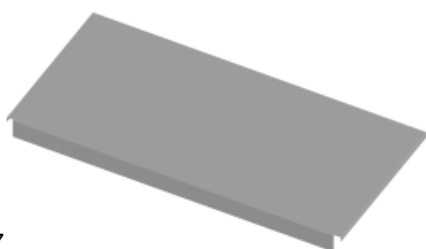

MFY-DB-36-17

Tools Required



MULTI HEX KEY
(INCLUDED)



PHILLIPS SCREW DRIVER
(NOT INCLUDED)





9/16" SOCKET WRENCH
(NOT INCLUDED)

How to Apply & Remove Graphics

Installation and removal of SEG graphics is easy!


Installation: Push the SEG bead into each corner of the frame (1-4) with your thumb, then push the SEG bead into the middle of the run (5-8) and work your way around the perimeter of the frame until all beading is pushed in properly; if necessary, go around the perimeter again to ensure beading is secure in the extrusion profile.

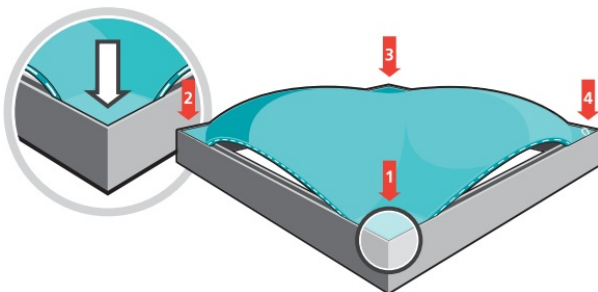

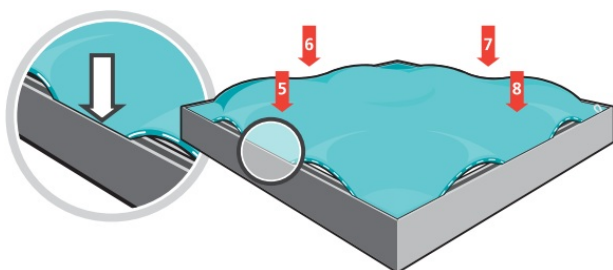

Note: Keep the set up area clean by using a drop cloth, washing hands before set-up or by wearing gloves.

Removal: Use the pull tab located on the graphic and gently pull the graphic from the frame, going around the perimeter.

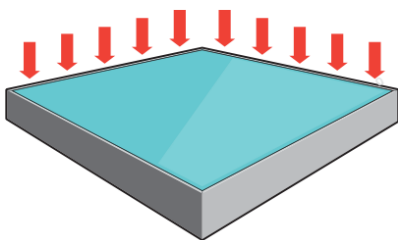


Graphics Storage & Care


Graphics should be folded with the graphic facing inward and stored in a zip lock /sealable plastic bag. Spot clean by wiping with a damp white cloth. If washing is necessary, use a commercial size front-loading washing machine, gentle cycle with cool water. Line dry flat. Dry cleaning is NOT recommended to prevent shrinkage.

SETUP INSTRUCTIONS

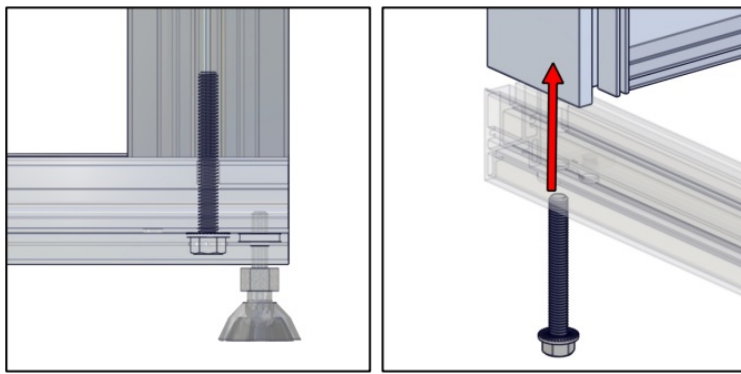


QTY	IMAGE	DESCRIPTION
3		3/8-16 x 2.5"L bolt
1		2350MM (92.52in) RIGHT UPRIGHT
3		512MM (20.16IN) SUPPORT LEG
1		2350MM (92.52in) MIDDLE UPRIGHT
2		2250MM (88.58in) OF SWC EXTRUSION
1		2350MM (92.52in) LEFT UPRIGHT

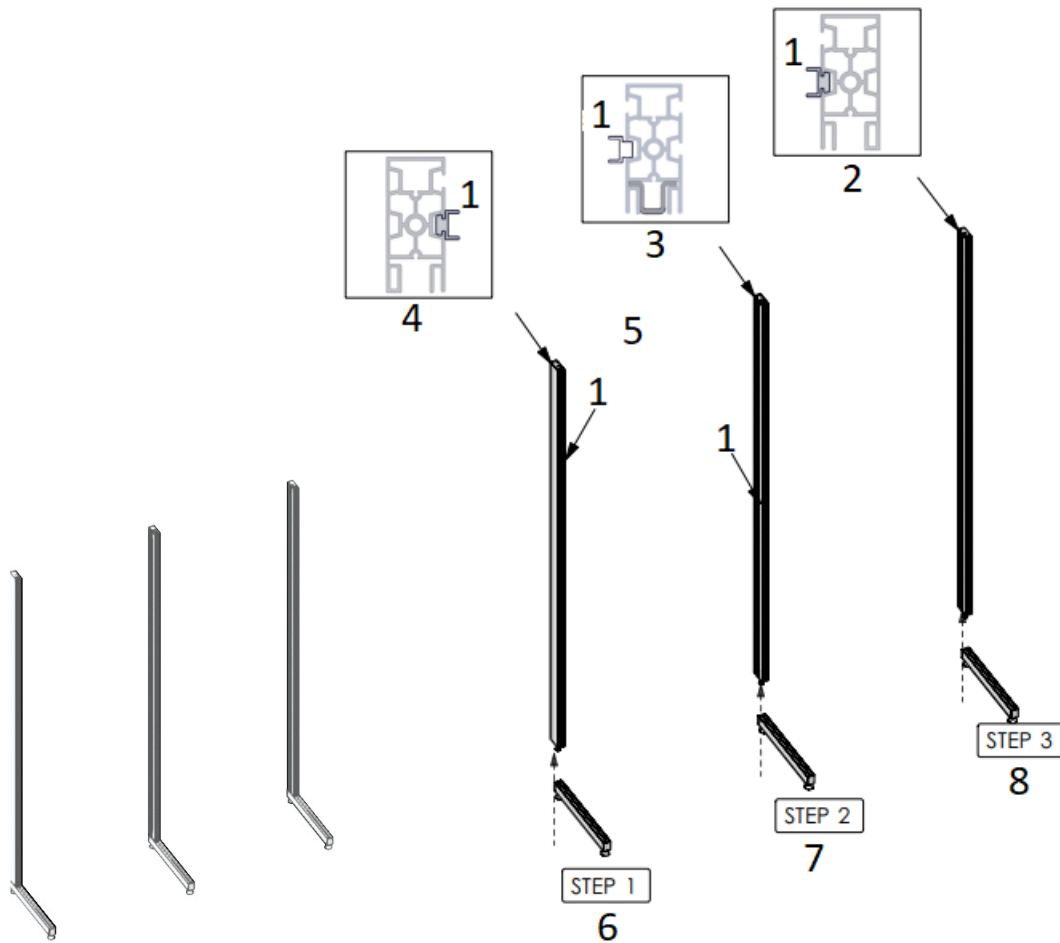


MFY-BOLT-375-16-2.5




1. SWC
2. RIGHT UPRIGHT
3. MIDDLE UPRIGHT
4. LEFT UPRIGHT
5. SWC PRE-INSTALLED
6. BOLT LEFT UPRIGHT TO FOOT
7. BOLT MIDDLE UPRIGHT TO FOOT
8. BOLT RIGHT UPRIGHT TO FOOT

QTY	IMAGE	DESCRIPTION
2		883MM (34.76in) OF 835 DOUBLE SIDED SEG EXTRUSION -WITH CAM LOCKS BOTH ENDS
1		883MM (34.76in) OF SWC EXTRUSION
4		WALL BRACKET

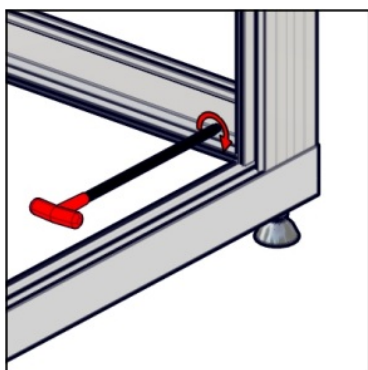


CROSS BRACE SITS ON SUPPORT LEG

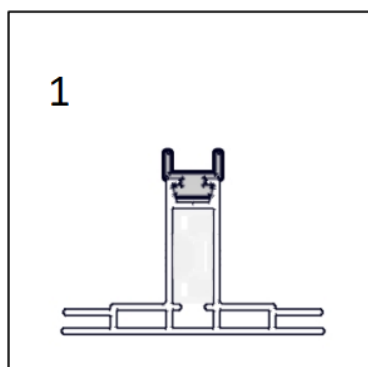


SLOT WALL TOP CHANNEL

1. SWC PRE-INSTALLED

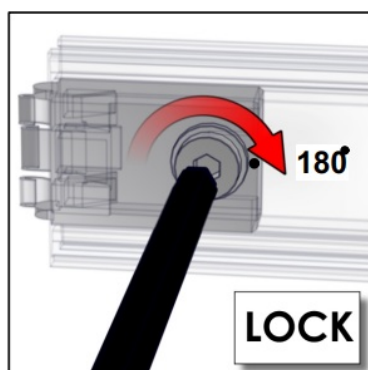

IMPORTANT! MAKE A HALF TURN TO LOCK EXTRUSIONS

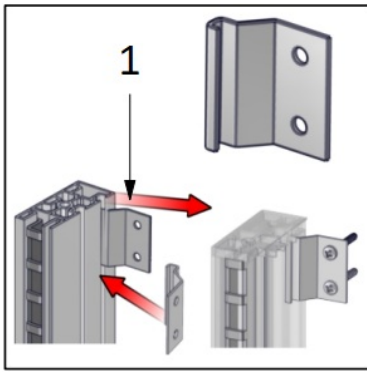


WALL MOUNT CLIPS

1. 16" FROM TOP



1. 16" FROM TOP


****IMPORT****

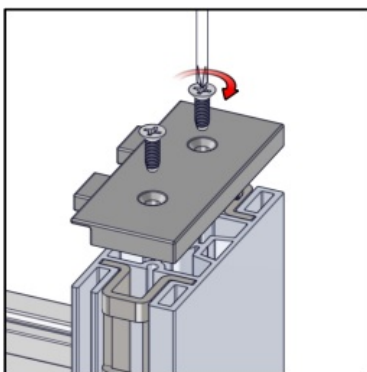

LOOSEN END CAP TO ATTACH TOP CROSS BRACE

STEP 6



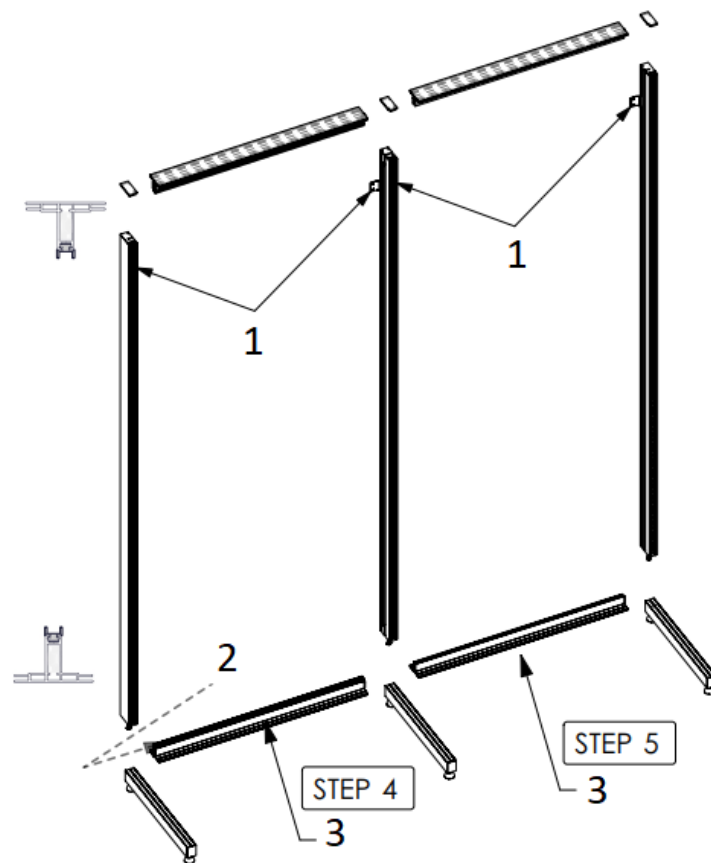



* LOCK TOP CROSS BRACE AND PLACE END CAPS TO ALIGN WALL BRACKETS
(TEMPORARY INSTALLED)




1. *FASTEN CLIPS TO WALL
2. SWC PRE-INSTALLED
3. LOCK CROSS BRACE TO UPRIGHTS


NOTE: BOTTOM CROSS BRACE SITS ON TOP INSIDE EDGE OF LEFT AND RIGHT SUPPORT LEG


Disclaimer: Unit must be permanently secured and fastened to wall or other structure for stability.

QTY	IMAGE	DESCRIPTION
2		883MM (34.76in) OF 835 DOUBLE SIDED SEG EXTRUSION -WITH CAM LOCKS BOTH ENDS
14		879MM (34.61in) LENGTH OF SLOTWALL EXTRUSION
1		879MM (34.61in) LENGTH OF SLOTWALL EXTRUSION -WITH 27.75MM BOTTOM CUT
1		883MM (34.76in) OF SWC EXTRUSION
2		7MM SEG PLASTIC END CAP FOR 831 EXTRUSION
1		7MM SEG PLASTIC END CAP FOR 830 EXTRUSION

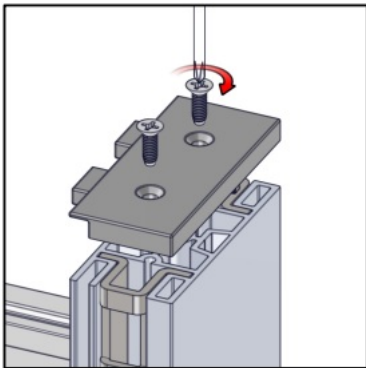

LOOSEN END CAP TO ATTACH TOP CROSS BRACE

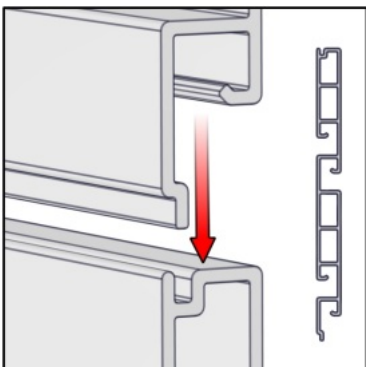


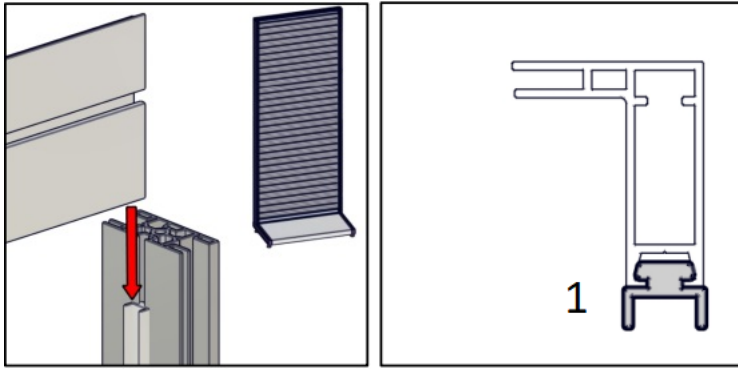

SLOTWALL 005


SLOT WALL BOTTOM CHANNEL

1. SWC PRE-INSTALLED

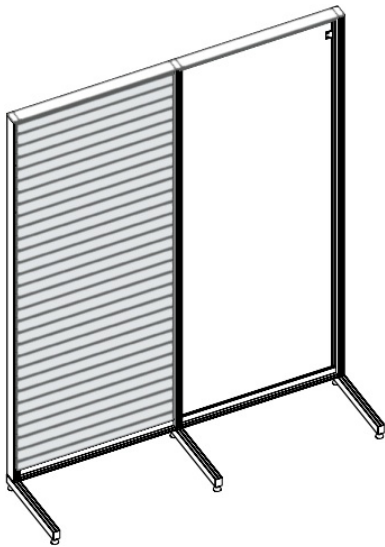




STEP 7

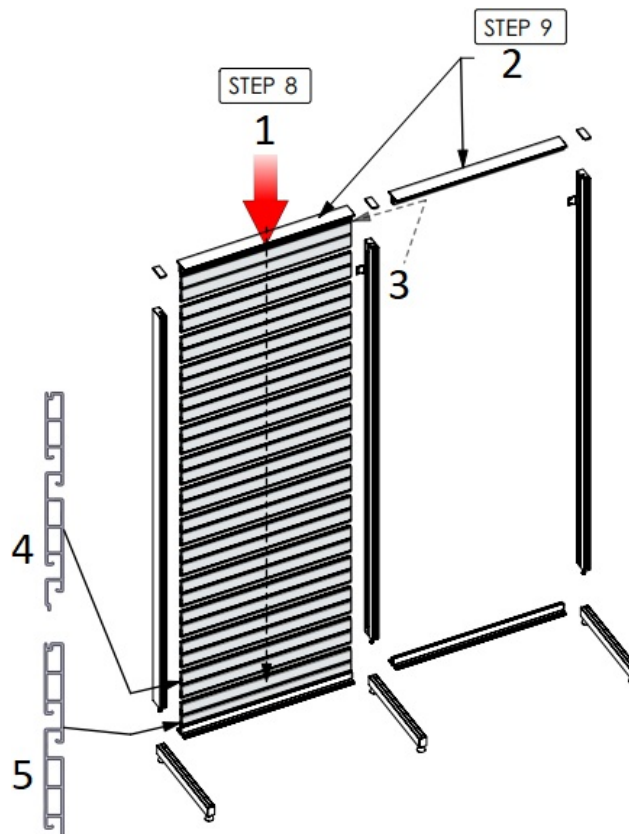* REMOVE TOP CROSS BRACE AND END CAPS (TEMPORARY INSTALLED)




1. SLOTWALL EXTRUSION
STACK 005-879
2. LOCK CROSS BRACE TO UPRIGHTS AND PLACE END CAPS
3. SWC PRE-INSTALLED
4. SLOTWALL
5. BOTTOM CUT SLOTWALL


1		(39.26 w X 96.61 h total size) 35.26 w X 92.61 h finish size, Dye-sub print on Eclipse Blockout Stretch, single sided, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner (WITH 1/4" NOTCH LEFT & RIGHT BOTTOM HORIZONTAL SIDE CORNERS)
2		36in WIDE X 17.25in DEEP – DROP-IN BASE PAN

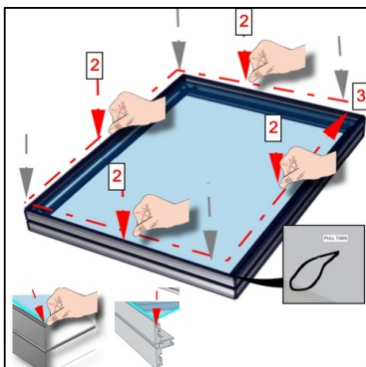

THEN PRESS ALONG THE PERIMETER EDGE

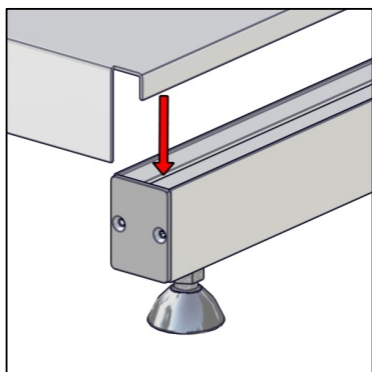



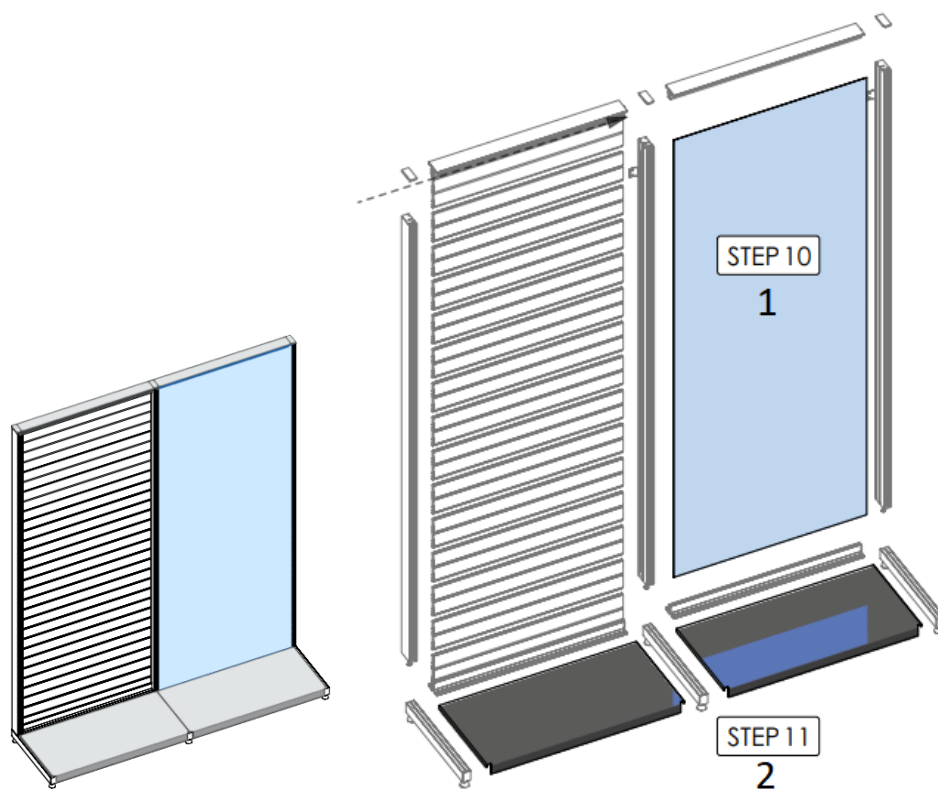











MFY-36-17-BASE-PAN




1. INSTALL GRAPHICS
2. PLACE BASE PAN IN GROOVE(FOOT)


Kit Hardware BOM

ITEM	COMPONENTS	QTY	DESCRIPTION
	004-883	2	883MM (34.76in) OF SWC EXTRUSION
	004-2250	2	2250MM (88.58in) OF SWC EXTRUSION
	005-879	14	879MM (34.61in) LENGTH OF SLOTWALL EXTRUSION
	005-879	1	879MM (34.61in) LENGTH OF SLOTWALL EXTRUSION -WITH 27.75MM B OTTOM CUT
	824-512	3	512MM (20.16IN) SUPPORT LEG
	830-2350	1	2350MM (92.52in) MIDDLE UPRIGHT
	830-EC	1	7MM SEG PLASTIC END CAP FOR 830 EXTRUSION
	831-2350	1	2350MM (92.52in) LEFT UPRIGHT
	831-2350	1	2350MM (92.52in) RIGHT UPRIGHT
	831-EC	2	7MM SEG PLASTIC END CAP FOR 831 EXTRUSION
	835-883-01-01	4	883MM (34.76in) OF 835 DOUBLE SIDED SEG EXTRUSION -WITH CAM LOCKS BOTH ENDS
	MFY-BOLT-375-16-2.5	3	3/8-16 x 2.5"L bolt
	MFY-BRKT3	4	WALL BRACKET
	MFY-DB-36-17	2	36in WIDE X 17.25in DEEP – DROP-IN BASE PAN



Kit Graphics BOM

I T E M	CO MP ON EN TS	Q T Y	DESCRIPTION
	MF Y-S S-0 5-G	1	(39.26 w X 96.61 h total size) 35.26 w X 92.61 h finish size, Dye-sub print on Eclipse Blockout S tretch, single sided, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner (WITH 1/4" NOTCH LEFT & RIGHT BOTTOM HORIZONTAL SIDE CORNERS)

Documents / Resources

	displaypros 05 MODify Single Sided Kit [pdf] Instruction Manual is_mfy-ss-k-05, 05 MODify Single Sided Kit, MODify Single Sided Kit, Single Sided Kit, Kit
---	---

References

-  [The Exhibitors' Handbook](#)
-  [Graphic Templates](#)