

Donner CV-2

Donner Wireless XLR Microphone Transmitter Receiver User Manual

Model: CV-2

1. INTRODUCTION

This user manual provides detailed instructions for the operation and maintenance of your Donner Wireless XLR Microphone Transmitter Receiver (Model CV-2). This system is designed to convert wired dynamic microphones into wireless units, offering high-fidelity audio transmission for various applications including audio mixers, PA systems, and cameras.

2. PACKAGE CONTENTS

- 1 x Donner CV-2 Wireless XLR Transmitter (TX)
- 1 x Donner CV-2 Wireless XLR Receiver (RX)
- 1 x USB Type-C Charging Cable
- 1 x User Manual



Image: The Donner CV-2 Wireless XLR Transmitter (TX) and Receiver (RX) units, showcasing their compact design.

3. PRODUCT OVERVIEW

The Donner CV-2 system consists of two main components: a transmitter (TX) and a receiver (RX). Both units feature a compact, integrated black metal design.

Key Features:

- **2.4GHz Wireless Transmission:** Provides stable and clean sound reception with strong anti-interference capabilities.
- **High-Fidelity Sound:** Features a 192kHz professional audio sampling rate, 20-20KHz frequency range, 110dB SNR, and 24-bit sampling depth for clear and dynamic audio.
- **Ultra-Low Latency:** Less than 5ms latency for virtually no noticeable delay.
- **Long Working Range:** Up to 100 feet (approximately 30 meters) wireless working range.
- **Long Battery Life:** Built-in rechargeable batteries provide up to 8 hours of continuous working time.
- **Multi-Channel Support:** Supports up to 6 simultaneous channels for multiple microphone setups.
- **Wide Compatibility:** Compatible with wired dynamic microphones, audio mixers, audio interfaces,

cameras, and PA systems that utilize XLR cable connections. *Note: Not suitable for condenser microphones.*

HIGH-FIDELITY SOUND ULTRA-LOW LATENCY



20Hz-20kHz
Frequency

192kHz/24bit
Sampling Rate

5ms
Latency

110dB
SNR

0.001%
THD

Image: The Donner CV-2 Transmitter unit highlighting its high-fidelity sound capabilities and low latency.

4. SETUP

1. **Charge the Units:** Before first use, fully charge both the transmitter (TX) and receiver (RX) units using the provided USB Type-C cable. The charging indicator light will show charging status (refer to Section 6 for details).
2. **Connect Transmitter (TX):** Plug the Donner CV-2 Transmitter directly into the XLR output of your dynamic microphone. Ensure a secure connection.
3. **Connect Receiver (RX):** Plug the Donner CV-2 Receiver into the XLR input of your audio mixer, PA system, audio interface, or camera. Ensure a secure connection.
4. **Power On:** Press and hold the power button on both the TX and RX units until the indicator light illuminates. The units will automatically pair. A solid blue light indicates a successful connection.
5. **Channel Selection (for multiple units):** The system supports up to 6 simultaneous channels. If using multiple CV-2 systems, ensure each pair is on a different channel to avoid interference. The auto-scanning technology intelligently detects and switches to the optimal channel in real-time.

EFFORTLESS FIT PERFECTLY COMPATIBLE

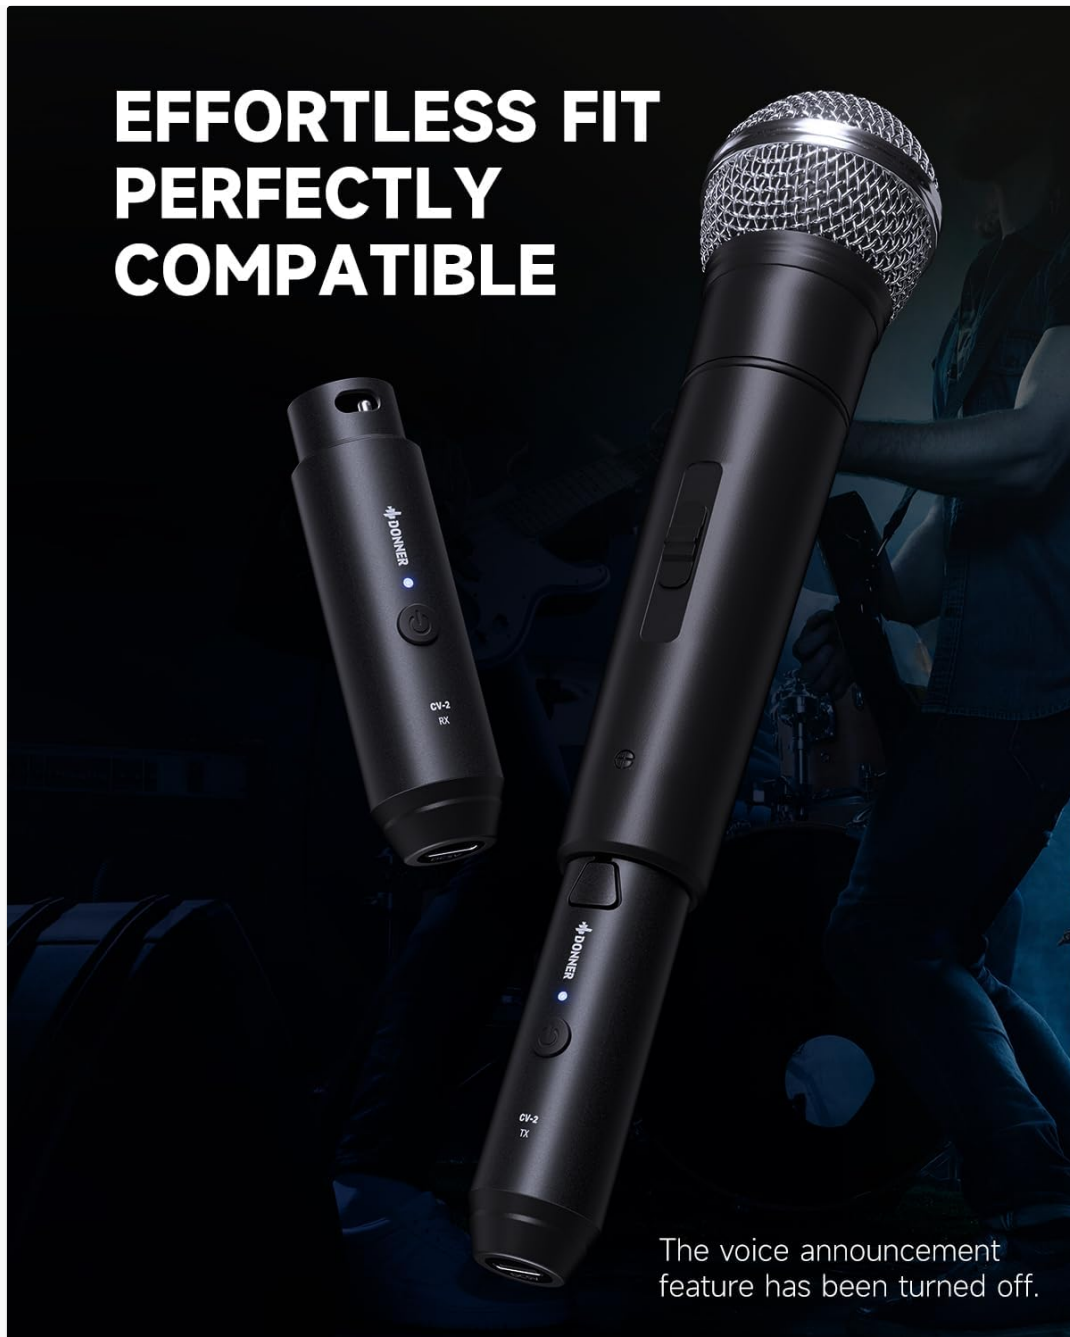


Image: The Donner CV-2 Transmitter seamlessly connected to a dynamic microphone, demonstrating its compact and compatible design.

5. OPERATING INSTRUCTIONS

1. **Power On/Off:** Press and hold the power button on each unit for approximately 2 seconds to turn them on or off.
2. **Pairing:** The TX and RX units are pre-paired from the factory. If re-pairing is needed, ensure both units are off. Turn on the TX unit, then turn on the RX unit. They should automatically connect. If not, consult the troubleshooting section.
3. **Indicator Lights:**
 - **Solid Blue:** Working normally, connected.
 - **Red Flashing:** Low battery.
 - **Solid Red (while charging):** Charging in progress.
 - **Light Off (while charging):** Fully charged.
4. **Usage:** Once connected, your dynamic microphone will transmit audio wirelessly to the connected audio device. Adjust volume levels on your audio mixer or PA system as needed.

100FT WIRELESS WORKING RANGE

Longer wireless distance ensures a larger space for performance



Image: A performer utilizing the Donner CV-2 wireless system, demonstrating its 100-foot working range in a live setting.

6. CHARGING

Both the transmitter and receiver units are equipped with built-in rechargeable Lithium Polymer batteries. To charge the units:

- Connect the provided USB Type-C charging cable to the charging port on each unit.
- Connect the other end of the USB cable to a standard USB power adapter (e.g., phone charger, computer USB port).
- The indicator light will be solid red during charging.
- Once fully charged, the indicator light will turn off.
- A full charge provides up to 8 hours of working time.

ULTRA-LONG BATTERY LIFE



Image: An illustration of the Donner CV-2 unit highlighting its internal rechargeable battery and USB-C charging port, emphasizing its long battery life.

7. COMPATIBILITY

The Donner CV-2 Wireless XLR Microphone System is designed for broad compatibility with professional audio equipment:

- **Microphones:** Compatible with wired dynamic microphones that use an XLR connection.
- **Audio Mixers:** Works with audio mixers featuring XLR inputs.
- **Audio Interfaces:** Connects to audio interfaces with XLR inputs.
- **PA Systems:** Suitable for use with PA systems that have XLR inputs.
- **Cameras:** Can be used with cameras that support XLR audio input.

Important Note: This system is **NOT** suitable for condenser microphones, which typically require phantom power.

MULTI-DEVICES COMPATIBLE



Audio Mixer



PA Speaker



Audio Interface



Camera

Image: The Donner CV-2 system demonstrating its compatibility with multiple devices, including an audio mixer, PA speaker, audio interface, and camera.

8. MAINTENANCE

To ensure the longevity and optimal performance of your Donner CV-2 system, follow these maintenance guidelines:

- **Cleaning:** Use a soft, dry cloth to clean the units. Do not use liquid cleaners or solvents, as they may damage the finish or internal components.
- **Storage:** Store the units in a cool, dry place away from direct sunlight and extreme temperatures. When not in use for extended periods, ensure the batteries are partially charged (around 50%) to preserve battery health.
- **Handling:** Avoid dropping the units or subjecting them to strong impacts. The metal casing provides durability, but excessive force can cause damage.
- **Charging:** Always use the provided USB Type-C cable for charging. Avoid using damaged cables or non-standard chargers.

9. TROUBLESHOOTING

Problem	Possible Cause	Solution
No sound output.	- Units not powered on. - Units not paired. - Low battery. - Incorrect connection. - Microphone issue. - Connected device (mixer, PA) issue.	- Ensure both TX and RX units are powered on (solid blue light). - Re-pair units if necessary (power cycle both). - Charge both units fully. - Verify TX is plugged into microphone XLR output and RX into device XLR input. - Test microphone with a wired connection to confirm functionality. - Check volume levels and input selection on your audio device.
Sound cutting out or interference.	- Out of range. - Strong 2.4GHz interference. - Low battery. - Obstructions.	- Reduce distance between TX and RX units. - Move away from Wi-Fi routers, microwave ovens, or other 2.4GHz devices. - Charge both units fully. - Ensure clear line of sight between TX and RX.
Units not charging.	- Faulty cable or adapter. - Charging port issue.	- Try a different USB Type-C cable and power adapter. - Ensure the cable is fully inserted into the charging port.

10. SPECIFICATIONS

Feature	Specification
Wireless Frequency Band	2.4 GHz
Audio Sampling Rate	192 kHz / 24-bit
Frequency Response	20 Hz - 20 kHz
Signal-to-Noise Ratio (SNR)	110 dB
Latency	< 5 ms
Total Harmonic Distortion (THD)	0.001%
Working Range	Up to 100 feet (approx. 30 meters)
Battery Life	Up to 8 hours
Battery Type	Lithium Polymer
Charging Port	USB Type-C
Dimensions (each unit)	Approx. 6.3 x 5.12 x 2.17 inches (Package Dimensions)
Weight (each unit)	Approx. 9.1 ounces (Item Weight)

11. SAFETY INFORMATION

- Do not disassemble or modify the device. This may cause malfunction, electric shock, or fire.
- Do not expose the device to water, moisture, or extreme temperatures.
- Keep the device away from heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
- Use only the provided or recommended charging cables and adapters.
- Dispose of batteries according to local regulations. Do not dispose of batteries in fire.
- Avoid prolonged exposure to high volume levels when using the system with headphones or monitoring equipment, as this may cause hearing damage.

12. WARRANTY AND SUPPORT

Donner provides a standard warranty for this product. For detailed warranty terms, conditions, and registration information, please refer to the warranty card included in your package or visit the official Donner website.


For technical support, troubleshooting assistance, or service inquiries, please contact Donner customer support through their official website or the contact information provided with your purchase.

Donner Official Website: www.donnerdeal.com

© 2025 Donner. All rights reserved.

Related Documents

	Donner CV-2 Wireless Microphone System User Manual User manual for the Donner CV-2 Wireless Microphone System, providing technical specifications, function overview, setup instructions, and safety guidelines.
	Donner Livejack M Audio Interface User Manual - Features, Specs, and Setup Comprehensive user manual for the Donner Livejack M Audio Interface. Learn about its features, technical specifications, connection guides, and troubleshooting tips for recording and live streaming.
	Donner MAMP5 Troubleshooting Guide: Amplifier Sound and Connectivity Issues Find solutions to common problems with your Donner MAMP5 stereo amplifier, including low sound, Bluetooth connectivity, FM radio, and product not working. Learn about speaker connections and phonograph setup.
	Donner BR1 Bluetooth 5.0 Audio Receiver: Owner's Manual User manual for the Donner BR1 Bluetooth 5.0 Audio Receiver, detailing features, setup instructions, specifications, and precautions for high-fidelity wireless audio.

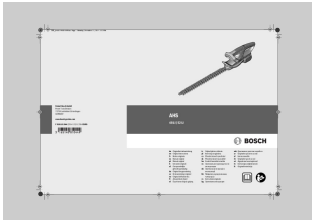


[pdf] User Manual Instructions

untitled View the instruction manual Instruction for Bosch AHS 48 LI Cordless Hedge Trimmer 18V 2 0Ah Argos Product 187 7919 1877919 D001 35665 direct argos support co uk storage |||

OBJ_DOKU-9003-009.fm Page 1 Monday, December 15, 2014 3:32 PM Robert Bosch GmbH Power Tools Division 70764 Leinfelden-Echterdingen GERMANY www.bosch-garden.com F 016 L81 044 2014.12 O / 264 EURO AHS 48 LI 52 LI de Originalbetriebsanleitung en Original instructions fr Notice originale es Manua...

lang:nl score:27 filesize: 9.16 M page_count: 263 document date: 2014-12-15




[pdf] User Manual Instructions

F016L94030 202006 F 016 L94 030 04 06 2020 Bosch Power Tools O 464 de Originalbetriebsanleitung en Original instruction Notice originale es Manual original pt it Istruzioni originali nl Oorspronkelijke gebruiksaanwijzing da brugsanvisning sv Bruksanvisning i no driftsinstruks fi Alkuperäiset ohjeet el Πρωτότυπο pa 2376311 free-instruction-manuals easygrasscut-18-100047458-original 335580-de-at bosch-diy storage de-at easygrasscut-18-260-100047455-original 335580-ru-by ru-by 33558 sv-se sv-se

Robert Bosch Power Tools GmbH 70538 Stuttgart GERMANY www.bosch-pt.com F 016 L94 030 2020.06 O / 464 F 016 L94 030 EasyGrassCut 18 18-230 18-26 18-260 de Originalbetriebsanleitung en Original instructions fr Notice originale es Manual original pt Manual original it Istruzioni originali nl ...

lang:tl score:21 filesize: 8.58 M page_count: 464 document date: 2020-06-04

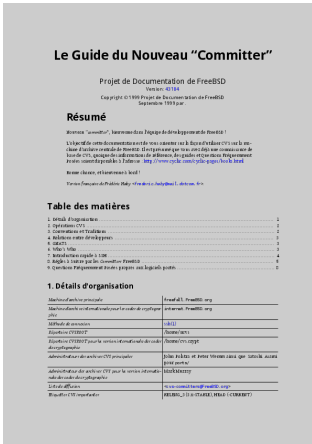


[pdf] Documentation Guide Declaration of Conformity

Le Guide du Nouveau Committer Projet de Documentation FreeBSD article doc layout org operating system bsd

FreeBSDDocumentationProject articles committers guide

Le Guide du Nouveau Committer Projet de Documentation de FreeBSD Version: 43184 Copyright 199: Projet de Documentation de FreeBSD Septembre 1999 par . Rsum Nouveau committer , bienvenue dans l quipe de dveloppement de FreeBSD L objectif de cette documentation est de vous orienter sur l faon ...

lang:fr score:21 filesize: 203.18 K page_count: 12 document date: 2015-11-22

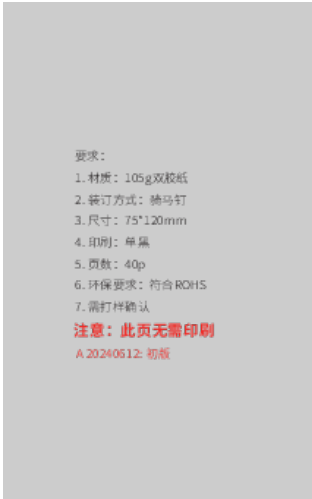

[pdf] User Manual Instructions

CV 2 A20240612 User manual GUANGZHOU RANTION TECHNOLOGY CO LTD 2AV7NCV 2AV7NCV2 cv

1. 105g 2. 75*120mm 4. 5. 40p 6. ROHS 7. A 20240612: **CV-2 WIRELESS MICROPHONE SYSTEM** User Manual Bedienungsanleitung Manuel d Instructions Manual de Usuario Manuale d Uso Thank Yo for Choosing DONNER Please Read This Manual Carefully Before Use. CONTENTS Package...

lang:it score:19 filesize: 3.46 M page_count: 41 document date: 2024-08-15



[\[pdf\]](#) User Manual Instructions Catalog

GBHProfessional notice GBH36V LI GBH36VF Bosch outilonline catalog bosch GBH Professional Robert Power Tools GmbH 70538 Stuttgart GERMANY pt 1 609 92A 2CT 2016 09 T 256 36 V VF de Originalbetriebsanleitung en Original instructions fr Notice originale es Manual original it Istruzioni originali nl Oorspronkelijke gebruiksaanwijzing da brugsanvisning sv Bruksanvisning i no driftsinstruks |||

OBJ_BUCH-3033-001.book Page 1 Friday, September 30, 2016 10:43 AM Robert Bosch Power Tools GmbH 70538 Stuttgart GERMANY www.bosch-pt.com 1 609 92A 2CT 2016.09 T / 256 GBH Professional 36 V-LI 36 VF-LI de Originalbetriebsanleitung en Original instructions fr Notice originale es Manual original...

lang:en **score:17** filesize: 6.48 M page_count: 18 document date: 2017-08-31




[\[pdf\]](#) User Manual Instructions

BK85XX BK8502 manual bkpmmedia s3 amazonaws manuals fr |||

CHARGES ELECTRONIQUES PROGRAMMABLES BK8500, BK8502, BK8510, BK8512, BK8514, BK8518, BK8520, BK8522, BK8524 BK8526 RSUM DES RGLES DE SCURIT GNRALITS TERMES FONCTIONNEMENT MISE LA TERRE ADDITIONNELLEMENT Les informations gnrales de securit donnees ici sont valables la fois pour le personnel qu...

lang:fr **score:17** filesize: 1.43 M page_count: 61 document date: 2009-02-26



[\[pdf\]](#) User Manual Instructions Catalog

notice technique francaise de la scie sabre sans fil gamme professionnelle GSA 18 V LI Bosch Description d utilisation et accessoires compatibles GSA18V professionnel outilonline catalog bosch Professional Robert Power Tools GmbH 70538 Stuttgart GERMANY pt 1 609 92A 2NB 2015 01 AS 199 EURO Originalbetriebsanleitung en Original instructions fr Notice originale es Manual original it Istruzioni originali nl Oorspronkelijke gebruiksaanwijzing da brugsanvisning sv Bruksanvisning i r driftsinstruks |||

OBJ_BUCH-760-007.book Page 1 Monday, September 19, 2016 2:21 PM Robert Bosch Power Tools GmbH 70538 Stuttgart GERMANY www.bosch-pt.com 1 609 92A 2NB 2015.01 AS / 199 EURO GSA 1 V-LI Professional de Originalbetriebsanleitung en Original instructions fr Notice originale es Manual original pt Man...

lang:en **score:17** filesize: 1.46 M page_count: 12 document date: 2018-03-30




[\[pdf\]](#) User Manual Instructions

BK85XX Oses Pascal 85xx manual bkpmmedia s3 amazonaws manuals fr |||

CHARGES ELECTRONIQUES PROGRAMMABLES BK8500, BK8502, BK8510, BK8512, BK8514, BK8518, BK8520, BK8522, BK8524 BK8526 RSUM DES RGLES DE SCURIT GNRALITS Les informations gnrales de securit donnees ici sont valables la fois pour le personnel qui utilise l appareil et pour le personnel de maintenanc...


lang:fr **score:17** filesize: 905.03 K page_count: 61 document date: 2017-01-12

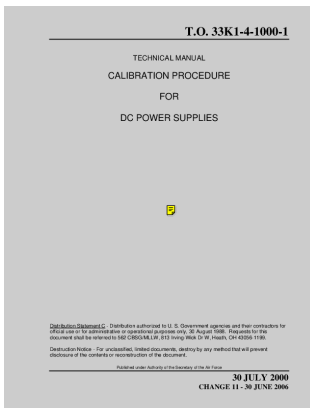

[DC Power Supply Calibration Procedure - U.S. Air Force Technical Manual T.O. 33K1-4-1000-1](#)

This U.S. Air Force Technical Manual (T.O. 33K1-4-1000-1) outlines the comprehensive calibration procedure for DC Power Supplies, detailing equipment requirements, preliminary operations, and specific calibration steps for voltmeter, ammeter, line and load regulation, and ripple and noise.

lang:en **score:16** filesize: 225.76 K page_count: 50 document date: 2021-04-30



[\[pdf\] User Manual Instructions](#)


Bosch CityMower 18 300 EasyGrassCut 861645 Manual bosch citymower easygrasscut manuals coolblue nl f8 |||

Robert Bosch Power Tools GmbH 70538 Stuttgart GERMANY www.bosch-pt.com F 016 L81 908

2019.04 O / 318 F 016 L81 908 CityMower 18 de Originalbetriebsanleitung tr Orijinal iletme talimati en

Original instructions pl Instrukcja oryginalna fr Notice originale cs Pvodn nvod k pouzvn es Manual or...

lang:tl **score:16** filesize: 14.88 M page_count: 772 document date: 0000-00-00




[Bosch EasyGrassCut 18V-230, 18V-26, 18V-260 User Manual](#)

Comprehensive user manual for Bosch EasyGrassCut 18V-230, 18V-26, and 18V-260 grass trimmers.

Includes safety instructions, operating guidelines, technical specifications, and maintenance information

lang:tl **score:15** filesize: 5.53 M page_count: 440 document date: 2022-04-12



[\[pdf\] User Manual Instructions](#)


F016L94299 202107 Manual BOSCH EasyGrassCut 18V 26 Akumulátorový vyžinač 06008C1C05 eu manual bosch kamody c soubory relatedfile |||

Robert Bosch Power Tools GmbH 70538 Stuttgart GERMANY www.bosch-pt.com F 016 L94 299

2021.07 O / 440 F 016 L94 299 EasyGrassCut 18V-230 18V-26 18V-260 de Originalbetriebsanleitung i

Original instructions fr Notice originale es Manual original pt Manual original it Istruzioni originali nl Oo..

lang:tl **score:15** filesize: 5.53 M page_count: 440 document date: 2022-04-12



[\[pdf\] User Manual Instructions](#)


F016L94299 202107 Manual BOSCH EasyGrassCut 18V 26 Akumulátorový vyžinač 06008C1C04 eu manual bosch kamody c soubory relatedfile |||

Robert Bosch Power Tools GmbH 70538 Stuttgart GERMANY www.bosch-pt.com F 016 L94 299

2021.07 O / 440 F 016 L94 299 EasyGrassCut 18V-230 18V-26 18V-260 de Originalbetriebsanleitung i

Original instructions fr Notice originale es Manual original pt Manual original it Istruzioni originali nl Oo..

lang:tl **score:15** filesize: 5.53 M page_count: 440 document date: 2022-04-12



[\[pdf\] User Manual](#)

LOSK0804EU Manual French horizonhobby

Feuille de rEglage Nom : rglage vhcule kit 8 2.0EU Ville : Piste Conditions q Intrieur q Extrieur

Suspension AV q Serre q Ouverte Pincement : 2,5 deg. pincement pos. Hauteur d assiette : 24 mm

Cambrure : -2 degrs Chasse : standard 22 degrs Barre stabilisatrice : 2,5 mm Piston/huile : ...

lang:fr **score:15** filesize: 18.72 M page_count: 26 document date: 2010-02-04

[\[pdf\] User Manual](#)

Copyright 2003 Ernst Paul Lehmann Patentwerk 21832 LGB Model Trains Locomotives Garden Train Sets G Scale User and Service Manuals onlytrains manuals |||

Name Street City State / Zipcode Signature / Date Name / Name Strae / Street PLZ-Ort / Postal Code-City


Land / Country Datum / Date The LGB Boxcar P.O. Box 187 Harrisburg, PA 17108 USA Wichtige

rechtliche Garantie: Ich wei, da ich diese Bestellung innerhalb von zehn Tagen widerrufen kann. Zur

Frist...

lang:en **score:15** filesize: 573.9 K page_count: 32 document date: 2003-06-06






[\[pdf\]](#) User Manual Instructions

untitled 779478 F016L81044 201402 bosch do it de 80 media garden gardenmedia manuals

OBJ_DOKU-9003-008.fm Page 1 Wednesday, February 5, 2014 11:33 AM Robert Bosch GmbH Power Tools Division 70745 Leinfelden-Echterdingen Germany www.bosch-garden.com F 016 L81 044 2014. O / 238 EURO AHS 48 LI 52 LI de Originalbetriebsanleitung en Original instructions fr Notice originale Ma...

lang:tl **score:13** filesize: 7.98 M page_count: 237 document date: 2014-02-05

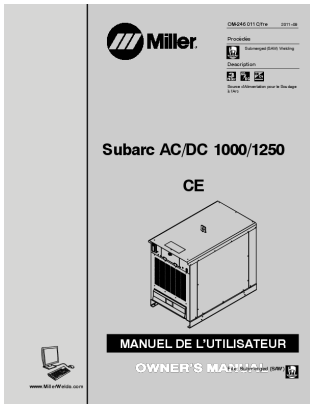

[\[pdf\]](#) Owner's Manual

o246011c fre dwille Subarc AC DC 1000 1250 CE millerwelds files owners manuals |||

OM-246 011C/fre 2011-09 Procds Submerged SAW Welding Description Source d Alimentation pour le Soudage l Arc Subarc AC/DC 1000/1250 CE www.MillerWelds.com MANUEL DE L UTILISATEUR File Submerged SAW Miller, votre partenaire soudage Flicitations et merci d avoir choisi Miller. Ds main...

lang:fr **score:13** filesize: 2.22 M page_count: 48 document date: 2011-11-23



[\[pdf\]](#) Owner's Manual

o1500 19w fre DWILLE SuitCase X TREME 12VS CE millerwelds files owners manuals |||

OM-1500-19/fre 2009-09 Procds 219 185W MIG Soudage fil fourr Description Dvidoir SuitCaseTM TM TREME 12VS CE CE et Modles Non CE www.MillerWelds.com MANUEL DE L UTILISATEUR Miller, votre partenaire soudage Flicitations et merci d avoir choisi Miller. Ds maintenant, vous pouvez faire vot...

lang:fr **score:13** filesize: 1.9 M page_count: 40 document date: 2009-11-18




[\[pdf\]](#) Owner's Manual

o264359n fre aradda Sries Big Blue 400 et X Pro 300R millerwelds files owners manuals |||

OM-264359N/fre Procds EE 2017-05 TIG MIG Soudage fil fourr Gougeage Description Gnrateur/Group autonome de soudage Sries Big Blue 400 et 400 X Pro Moteurs CAT, Kubota et Mitsubishi Modles CE non CE Big Blue 300R Pro Moteur Kubota www.MillerWelds.com MANUEL DE L UTILISATEUR Miller, vot...

lang:fr **score:13** filesize: 2.78 M page_count: 72 document date: 2017-06-01




[\[pdf\]](#) User Manual Instructions

untitled Návod k použití BOSCH AHS 48 LI akumulátorové nůžky na živé ploty 0 600 849 000 AHS52LI manual kamody cz soubory relatedfile |||

OBJ_DOKU-9003-006.fm Page 1 Monday, December 13, 2010 12:52 PM Robert Bosch GmbH Power Tools Division 70745 Leinfelden-Echterdingen Germany www.bosch-garden.com F 016 L70 729 2010. O / 298 UNI AHS 48 LI 52 LI de Originalbetriebsanleitung en Original instructions fr Notice originale es Manua...

lang:nl score:11 filesize: 8.82 M page_count: 297 document date: 2010-12-16




[\[pdf\]](#) User Manual Instructions

F016L94299 202107 Bosch DIY EasyGrassCut 18V 230 cordless lawn trimmer incl rechargeable battery 2 0Ah Manual easygrasscut 18v 260 100053336 original 366061 de at bosch diy storage |||

Robert Bosch Power Tools GmbH 70538 Stuttgart GERMANY www.bosch-pt.com F 016 L94 299 2021.07 O / 440 F 016 L94 299 EasyGrassCut 18V-230 18V-26 18V-260 de Originalbetriebsanleitung Original instructions fr Notice originale es Manual original pt Manual original it Istruzioni originali nl Oo..

lang:tl score:11 filesize: 8.98 M page_count: 440 document date: 2021-07-22



[\[pdf\]](#) User Manual Instructions

untitled OBJ DOKU 46284 001 fm Page 1 Wednesday October 7 2015 10 AL 1830 CV Sachnummer Ladestrom REA EU 2 60 225 965 UK 967 manuale cdn migros ch mservice documents 44c09753c062844c3a19fec9fccfbd5948eae15 |||

OBJ_DOKU-46284-001.fm Page 1 Wednesday, October 7, 2015 10:01 AM Robert Bosch GmbH Power Tools Division 70764 Leinfelden-Echterdingen GERMANY www.bosch-garden.com F 016 L81 238 2015.10 O / 248 EURO AHS 48-20 LI 50-20 LI 53-20 LI 55-20 LI de Originalbetriebsanleitung en Original instructions fr Notice originale es Manual original pt Manual original it Istruzioni originali nl Oo..

lang:no score:10 filesize: 10.75 M page_count: 247 document date: 2016-02-05