



DMP INTERNATIONAL XR Series Scalable and Flexible Panel User Guide

[Home](#) » [DMP INTERNATIONAL](#) » DMP INTERNATIONAL XR Series Scalable and Flexible Panel User Guide 

DMP INTERNATIONAL XR Series Scalable and Flexible Panel User Guide




Contents

- 1 XR International System Design
- 2 WIRELESS DEVICES
- 3 XR International System Applications
- 4 ADD A DOOR OF ACCESS CONTROL
- 5 1135 WIRELESS SOUNDER & ZONE
- 6 PANEL SPECIFICATIONS
- 7 KEYPAD FEATURES
- 8 MODEL NUMBER DESCRIPTION
- 9 Documents / Resources
 - 9.1 References
- 10 Related Posts

XR International System Design

To monitoring center via dialer, cellular or network (eight paths of communication) Add cellular with the 263LTE-INT-A and 381-2 (AT&T)

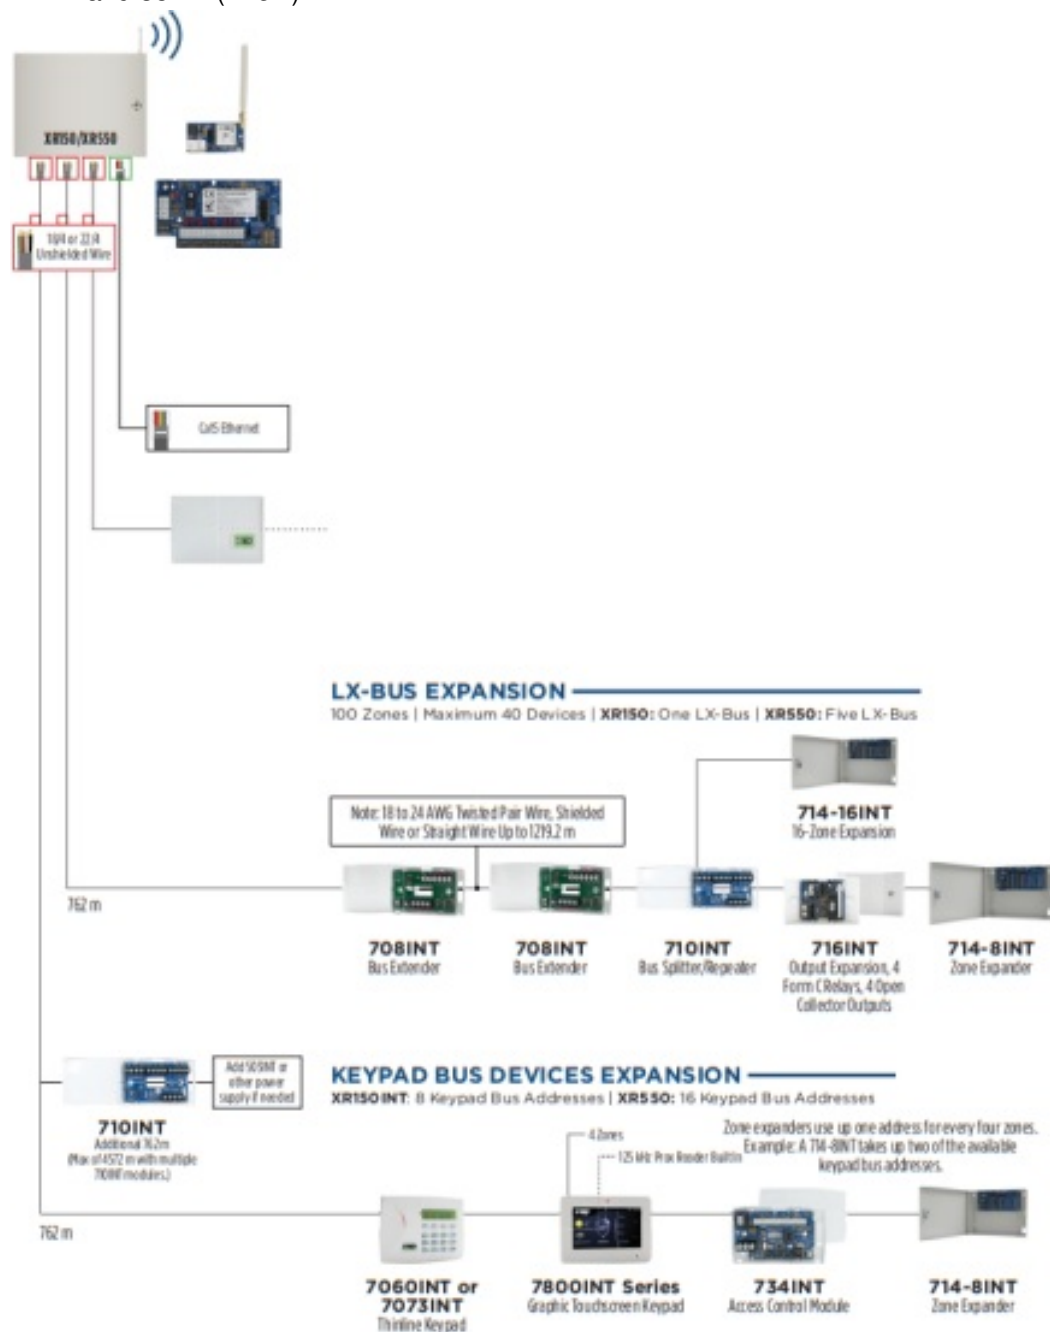

712-8INT

Zone Expansion Module (Mounts inside panel, providing eight additional zones and takes up two addresses in keypad bus.)

1100XINT

Wireless Receiver (365.76 m open air) Receiver can be remoted 152.4 m of 22 AWG or 304.8 m of 18 AWG from the panel

WIRELESS DEVICES

- **1100RINT (365.76 m)**

Repeater (Max of 8 Repeaters)



- **1103INT Commercial Universal**

Transmitter with Wall Tamper (Internal and/or External)



- **1122INT**

PIR Motion Detector



- **1128INT**

Glassbreak Detector (12' Range)



- **1135INT**

Siren (Adjustable to 110 dB or 100 dB)



- **1142INT**

Two-Button Hold-Up Transmitter (Under Counter)



- **1144-1INT**

One-Button Key Fob (Panic)



- **1144-2INT**

Two-Button Key Fob (Arm/Disarm)




- **1144-4INT**

Four-Button Key Fob (Programmable)



XR International System Applications


ADD A DOOR OF ACCESS CONTROL

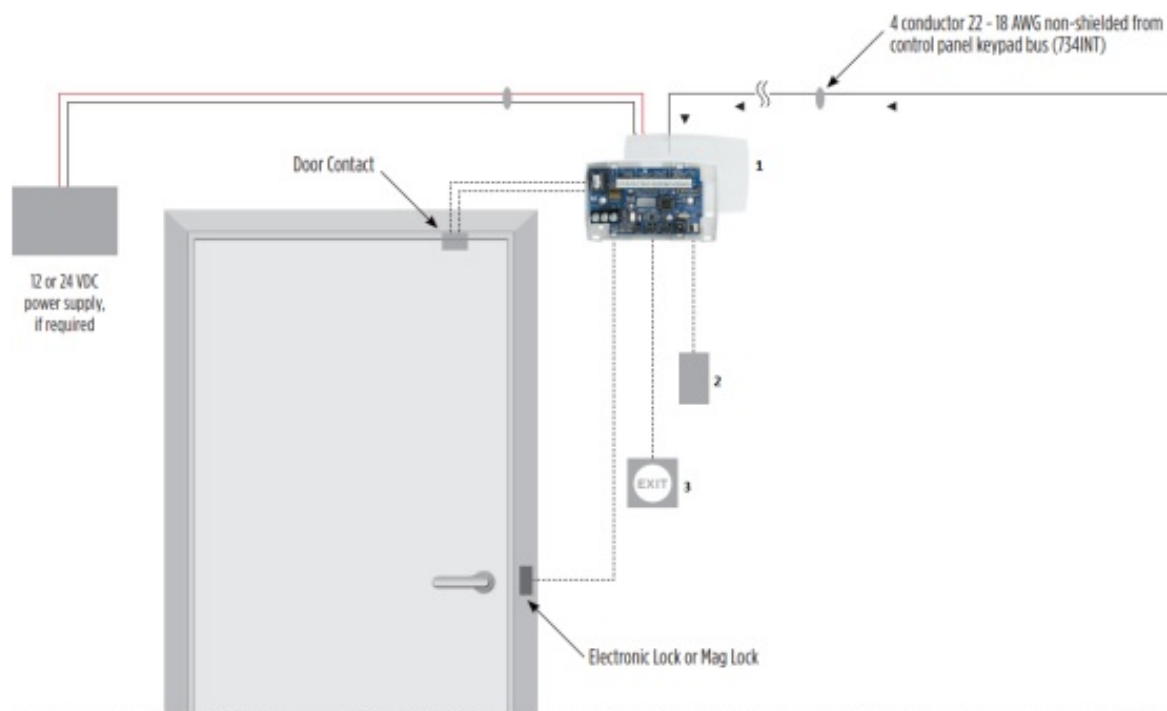

1. **734INT** Four-Wire Access Control Module (Supports door strike, reader, prox and door contact.)
2. Supports up to 255-bit Wiegand reader **Example:** MP-5365 Miniprox Reader or PP-6005B Proxpoint Plus Reader
3. Request-to-Exit Button or REX Motion

1135 WIRELESS SOUNDER & ZONE

100INT Series Two-Way™ Wireless Device

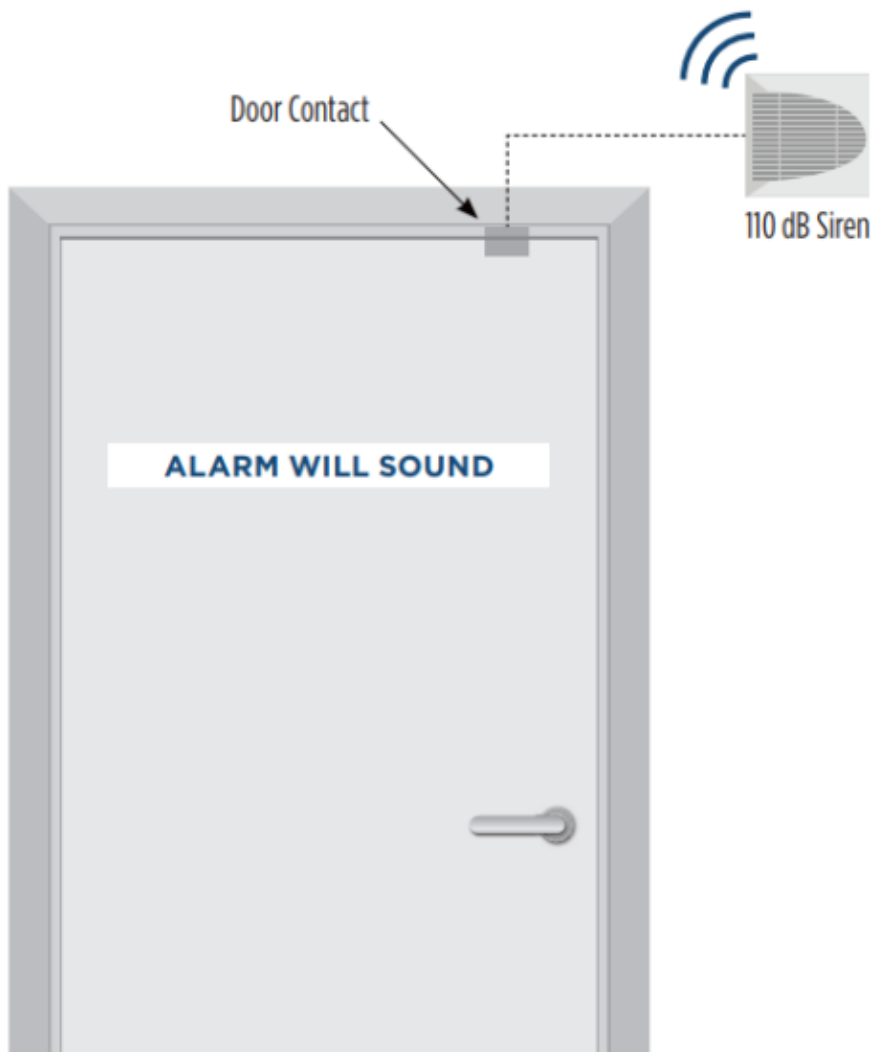

- Use as loud local “chime” with 1 second sound
- Resettable from keypad
- Provides door contact zone intrusion system

PANEL SPECIFICATIONS

	XR150	XR550
Total Number of Zones	142	574
Number of Possible Hardwired Zones	142	574
Number of Possible DMP Wireless Zones	100	500
Number of Areas	8	32
Number of User Codes	10,000	10,000
Number of Door Access Points	8	96
Number of Supervised Keypads	8	16
Auxiliary Power	1.5 Amps	1.5 Amps
Switched 4-Wire Smoke Detector Power	Yes	Yes

KEYPAD FEATURES

Model	Series	Zones	Normal Backlight	Internal Relay	Wigand input	Internal Prox	Compatible Panels
7060INT	Thin line	None	Green	No	No	No	XT & XR Series
7073INT	Thin line	Four	Green	Yes	Yes	Yes	XT & XR Series
7872INT	Touch screen	Four	Blue	No	No	Yes	XT & XR Series
7873INT	Touch screen	Four	Blue	Yes	Yes	Yes	XT & XR Series

MODEL NUMBER DESCRIPTION



available on XR550INT panels.

Note: Models ending in PCB indicate it is the PC board and power supply only, no cabinet.





DMP.com
© 2024 Digital Monitoring Products, Inc.
LT-2873 | 24363



	<p>DMP INTERNATIONAL XR Series Scalable and Flexible Panel [pdf] User Guide</p> <p>XR Series, XR Series Scalable and Flexible Panel, Scalable and Flexible Panel, Flexible Panel</p>
--	--

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.