

## artika FM-BE5C-BL

# artika Benson 15" LED Flush Mount Ceiling Light Instruction Manual

Model: FM-BE5C-BL

## 1. INTRODUCTION

This manual provides detailed instructions for the safe installation, operation, and maintenance of your artika Benson 15" LED Flush Mount Ceiling Light. Please read this manual thoroughly before installation and retain it for future reference.

The artika Benson LED Flush Mount Ceiling Light features a modern black and rattan design, integrated LED lighting with 5 CCT (Correlated Color Temperature) options, and dimmable functionality. It is designed for indoor use in various rooms such as bedrooms, entryways, kitchens, and living rooms.



## 2. SAFETY INFORMATION

- **WARNING:** Risk of electric shock. Disconnect power at the circuit breaker or fuse box before installation or servicing.
- All wiring connections must be in accordance with local and national electrical codes. If you are unfamiliar with proper electrical wiring connections, consult a qualified electrician.
- Ensure the fixture is securely mounted to a structurally sound part of the ceiling.
- Do not attempt to modify the fixture. Any modifications may void the warranty and create a safety hazard.
- This fixture is designed for indoor use only. Do not expose to water or moisture.
- Do not look directly into the LED light source for extended periods.

## 3. PACKAGE CONTENTS

Verify that all components are present before beginning installation. If any parts are missing or damaged, contact artika customer service.

- LED Flush Mount Ceiling Light Fixture
- Mounting Bracket
- Mounting Hardware (screws, wire nuts, safety hook)
- Instruction Manual

## 4. SPECIFICATIONS



Image 4.1: Product dimensions, showing a diameter of 15.16 inches (38.5 cm) and a height of 7.24 inches (18.4 cm).

Feature	Detail
Model Number	FM-BE5C-BL
Dimensions (L x W x H)	15.16" x 15.16" x 7.24" (38.5 cm x 38.5 cm x 18.4 cm)
Material	Plastic (with rattan design)
Light Source	Integrated LED
Brightness	1200 Lumens
Wattage	26 Watts
Voltage	120 Volts
Color Temperature (CCT)	5 selectable options (Warm to Cool White)
Dimmable	Yes (compatible with most LED dimmers)
Lifespan	50,000 hours
Mounting Type	Flush Mount (Hardwired)
Indoor/Outdoor Usage	Indoor only



Image 4.2: Overview of key features including integrated LED, 50,000-hour lifespan, dimmable function, easy installation, 1200 lumens brightness, and selectable white technology.

## 5. INSTALLATION INSTRUCTIONS (SETUP)

**Tools Required (Not Included):** Screwdriver, wire strippers, electrical tape, safety glasses, ladder.

- 1. Turn Off Power:** Before starting, ensure the power to the circuit is completely OFF at the main electrical panel (circuit breaker or fuse box).
- 2. Prepare Mounting Surface:** If replacing an existing fixture, carefully remove it. Ensure the junction box is securely mounted and capable of supporting the fixture's weight.
- 3. Install Mounting Bracket:** Attach the mounting bracket to the junction box using the provided screws. Ensure it is flush and stable.
- 4. Connect Wiring:**
  - Connect the **black** wire from the fixture to the **black** (live) wire from the junction box using a wire nut.
  - Connect the **white** wire from the fixture to the **white** (neutral) wire from the junction box using a wire nut.
  - Connect the **ground** wire from the fixture to the **ground** wire from the junction box (or to the green ground screw on the mounting bracket) using a wire nut.



- Carefully tuck all wires into the junction box.
5. **Attach Fixture to Mounting Bracket:** Align the fixture with the mounting bracket. Use the provided safety hook to temporarily support the fixture during wiring, if available. Secure the fixture to the mounting bracket using the designated screws. Ensure there are no gaps between the fixture and the ceiling.
  6. **Restore Power:** Once the fixture is securely installed, restore power at the circuit breaker.

**Note:** For optimal installation, especially in stippled ceilings, consider using the supplemental fasteners (drywall expansion plugs and screws) if provided, to ensure a perfectly flush fit and prevent sagging, as noted in user feedback. It is recommended to have a second person assist with installation due to the size and weight of the fixture.

## 6. OPERATING INSTRUCTIONS

---

### 6.1. Adjusting Color Temperature (CCT)

Your artika Benson light features 5 selectable CCT options, allowing you to choose between various shades of white light, from warm to cool. The CCT selection switch is located on the side of the fixture.

1. Ensure the light is powered on.
2. Locate the small switch on the side of the fixture.
3. Toggle the switch to cycle through the 5 available color temperatures (e.g., 2700K, 3000K, 3500K, 4000K, 5000K). The light will change with each toggle.
4. Stop at your desired color temperature. The fixture will remember your last setting when turned off and on again.



Image 6.1: Visual representation of the 5 CCT options, ranging from warm white (2700K) to cool white (5000K).

## 6.2. Dimming Functionality

This fixture is dimmable and compatible with most standard LED dimmers. To dim the light:

1. Ensure you have an LED-compatible dimmer switch installed on your wall.
2. Adjust the dimmer switch to your desired brightness level.

**Note:** If you experience flickering or inconsistent dimming, ensure your dimmer switch is specifically designed for LED lighting. Consult an electrician if issues persist.

## 7. MAINTENANCE

- **Cleaning:** Always disconnect power before cleaning. Use a soft, dry or slightly damp cloth to wipe the exterior of the fixture. Do not use abrasive cleaners, solvents, or polishes as they may damage the finish or electrical components.
- **LED Light Source:** The integrated LED light source is designed for a long lifespan (50,000 hours) and is not replaceable. Do not attempt to open or service the LED module.

## 8. TROUBLESHOOTING

Problem	Possible Cause	Solution
Light does not turn on.	<ul style="list-style-type: none"><li>Power is off at the circuit breaker.</li><li>Loose or incorrect wiring connections.</li><li>Faulty wall switch.</li></ul>	<ul style="list-style-type: none"><li>Check the circuit breaker and ensure power is on.</li><li>Verify all wiring connections are secure and correct (refer to Section 5).</li><li>Test the wall switch with another device or replace it if faulty.</li></ul>
Light flickers or dims inconsistently.	<ul style="list-style-type: none"><li>Incompatible dimmer switch.</li><li>Loose wiring.</li></ul>	<ul style="list-style-type: none"><li>Ensure an LED-compatible dimmer switch is used.</li><li>Check wiring connections (with power off).</li></ul>
Incorrect color temperature selected.	CCT switch is set to an undesired option.	Toggle the CCT switch on the side of the fixture to select the preferred color temperature (refer to Section 6.1).

## 9. WARRANTY AND SUPPORT







This artika product comes with a Limited Warranty. For specific warranty terms and conditions, please refer to the documentation included with your purchase or visit the official artika website.

For technical assistance, missing parts, or warranty claims, please contact artika customer support:


- Website:** [www.artika.com](http://www.artika.com) (Example link, actual link may vary)
- Phone:** Refer to artika's official website for regional contact numbers.

## 10. DISPOSAL INFORMATION

This product contains electronic components and should not be disposed of with general household waste. Please dispose of this product responsibly at an authorized recycling facility in accordance with local regulations. Contact your local authorities for information on recycling options.

 <p>LED Flush Mount Light  <b>INSTRUCTION MANUAL</b>      IMPORTANT: READ CAREFULLY AND KEEP.      Français (FR) - Français  <b>MANUEL D'INSTRUCTIONS</b>      IMPORTANT : À LIRE ATTENTIVEMENT ET À CONSERVER.      Español (ES) - Español  <b>MANUAL DE INSTRUCCIONES</b>      IMPORTANTE: LEER DETENIDAMENTE Y CONSERVAR.</p> <p>UL LISTED      ETL      100% Dimmable      100% Dimmable      100% Dimmable      100% Dimmable</p>	<p><a href="#">Artika Dunham LED Flush Mount Light Installation Manual (FM-DU5C-HD2WN)</a></p> <p>Comprehensive instruction manual for the Artika Dunham LED flush mount light (Model FM-DU5C-HD2WN), detailing installation, hardware, safety precautions, and warranty information.</p>
 <p>LED Ceiling Light  <b>INSTRUCTION MANUAL</b>      IMPORTANT: READ CAREFULLY AND KEEP.      Français (FR) - Français  <b>MANUEL D'INSTRUCTIONS</b>      IMPORTANT : À LIRE ATTENTIVEMENT ET À CONSERVER.      Español (ES) - Español  <b>MANUAL DE INSTRUCCIONES</b>      IMPORTANTE: LEER DETENIDAMENTE Y CONSERVAR.</p> <p>UL LISTED      ETL      100% Dimmable      100% Dimmable      100% Dimmable      100% Dimmable</p>	<p><a href="#">Artika Aiden LED Ceiling Light Installation Manual</a></p> <p>Comprehensive instruction manual for the Artika Aiden LED ceiling light (models FM-AIC-HD2BL, FM-AIC-HD2WH), covering installation, safety, features, and warranty.</p>
 <p>LED Ceiling Light  <b>INSTRUCTION MANUAL</b>      IMPORTANT: READ CAREFULLY AND KEEP.      Français (FR) - Français  <b>MANUEL D'INSTRUCTIONS</b>      IMPORTANT : À LIRE ATTENTIVEMENT ET À CONSERVER.      Español (ES) - Español  <b>MANUAL DE INSTRUCCIONES</b>      IMPORTANTE: LEER DETENIDAMENTE Y CONSERVAR.</p> <p>UL LISTED      ETL      100% Dimmable      100% Dimmable      100% Dimmable      100% Dimmable</p>	<p><a href="#">Artika Optical Trio FM-OT LED Ceiling Light Installation Manual</a></p> <p>Detailed installation instructions, warranty information, and safety precautions for the Artika Optical Trio FM-OT LED ceiling light. Includes a list of included hardware and tools required.</p>
 <p>LED Ceiling Light  <b>INSTRUCTION MANUAL</b>      IMPORTANT: READ CAREFULLY AND KEEP.      Français (FR) - Français  <b>MANUEL D'INSTRUCTIONS</b>      IMPORTANT : À LIRE ATTENTIVEMENT ET À CONSERVER.      Español (ES) - Español  <b>MANUAL DE INSTRUCCIONES</b>      IMPORTANTE: LEER DETENIDAMENTE Y CONSERVAR PARA.</p> <p>UL LISTED      ETL      100% Dimmable      100% Dimmable      100% Dimmable      100% Dimmable</p>	<p><a href="#">Artika FM-AX Axel LED Ceiling Light - Installation Manual</a></p> <p>Official instruction manual for the Artika FM-AX Axel LED Ceiling Light. Includes installation steps, hardware list, safety warnings, and warranty information.</p>
 <p>LED Ceiling Light  <b>INSTRUCTION MANUAL</b>      IMPORTANT: READ CAREFULLY AND KEEP.      Français (FR) - Français  <b>MANUEL D'INSTRUCTIONS</b>      IMPORTANT : À LIRE ATTENTIVEMENT ET À CONSERVER.      Español (ES) - Español  <b>MANUAL DE INSTRUCCIONES</b>      IMPORTANTE: LEER DETENIDAMENTE Y CONSERVAR.</p> <p>UL LISTED      ETL      100% Dimmable      100% Dimmable      100% Dimmable      100% Dimmable</p>	<p><a href="#">Artika Aiden LED Ceiling Light - FM-AIC-HD2BL - Installation Manual &amp; Product Information</a></p> <p>Comprehensive instruction manual and product information for the Artika Aiden LED Ceiling Light (Model FM-AIC-HD2BL). Includes installation guide, hardware list, tunable white technology details, FCC compliance, and warranty information.</p>
 <p>LED Ceiling Light  <b>INSTRUCTION MANUAL</b>      IMPORTANT: READ CAREFULLY AND KEEP.      Français (FR) - Français  <b>MANUEL D'INSTRUCTIONS</b>      IMPORTANT : À LIRE ATTENTIVEMENT ET À CONSERVER.      Español (ES) - Español  <b>MANUAL DE INSTRUCCIONES</b>      IMPORTANTE: LEER DETENIDAMENTE Y CONSERVAR.</p> <p>UL LISTED      ETL      100% Dimmable      100% Dimmable      100% Dimmable      100% Dimmable</p>	<p><a href="#">Artika Swirl Butterfly FM-SB-CR10 LED Ceiling Light Instruction Manual</a></p> <p>Instruction manual for the Artika Swirl Butterfly FM-SB-CR10 LED ceiling light, detailing installation, safety, and warranty information.</p>



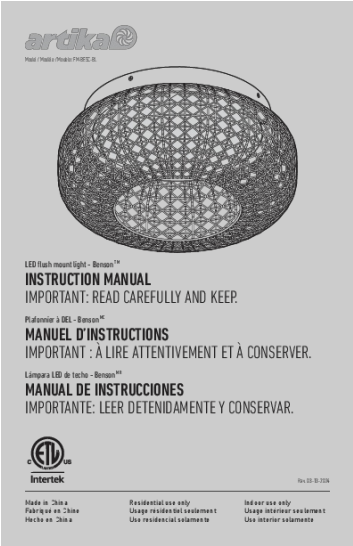


[pdf] User Manual Instructions

User manual ARTIKA FOR LIVING INC FM BE5C 2AUHG 2AUHGFMBE5C fm be5c

Model / Modle / Modelo: **FM-BE5C-BL** LED flush mount light - Benson TM

INSTRUCTION MANUAL IMPORTANT: READ CAREFULLY AND KEEP. Plafonnier DEL - Benson MC MANUEL D INSTRUCTIONS IMPORTANT : LIRE ATTENTIVEMENT ET CONSERVER. Lmpara LED de techo - Benson MR MANUAL DE INSTRUCCIONES IMPORTANTE: LEER DETEN...

lang:en score:33 filesize: 2.05 M page\_count: 12 document date: 2024-05-01

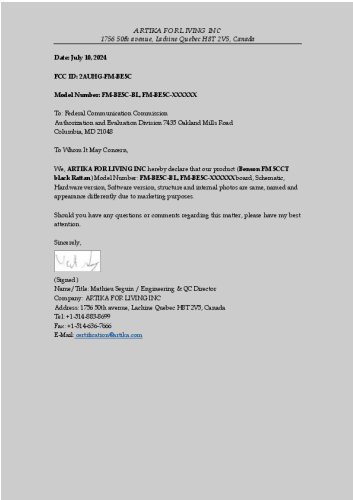

[pdf] Declaration of Conformity Product Photos Teardown


wenliang li Letter of declaration model difference ARTIKA FOR LIVING INC FM BE5C 2AUHG

2AUHGFMBE5C fm be5c

ARTIKA FOR LIVING INC 1756 50th avenue, Lachine Quebec H8T 2V5, Canada

Date: July 10, 2024 FCC ID: 2AUHG-FM-BE5C Model Number: **FM-BE5C-BL**, FM-BE5C-XXXXXX To: Federal Communication Commission Authorization and Evaluation Division 7435 Oakland Mills Road Columbia, MD 21048 To Whom It May Concern, We, ...

lang:en score:30 filesize: 130.41 K page\_count: 1 document date: 2024-07-12

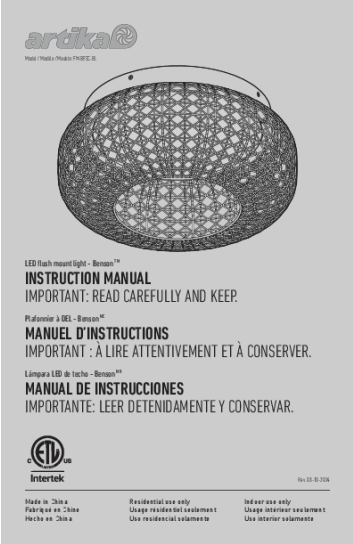

[pdf] User Manual Instructions

Download ManualBenson lámpara de techo LED 15 in 5 CCT negro y ratán

Artikae78bcd91f9f2309d07f6381d96d0dc3612643d2e BENSON FM BE5C BL IM 8725eaea 2e0b 4ed2 a681 df4cde3935ceartika cdn shop files e78bcd91f9f2309d07f6381d96d0dc3612643d2e df4cde3935ce v 13552263407742250283 |||

Model / Modle / Modelo: **FM-BE5C-BL** LED flush mount light - BensonTM

INSTRUCTION MANUAL IMPORTANT: READ CAREFULLY AND KEEP. Plafonnier DEL - BensonMC MANUEL D INSTRUCTIONS IMPORTANT : LIRE ATTENTIVEMENT ET CONSERVER. Lmpara LED de techo - BensonMR MANUAL DE INSTRUCCIONES IMPORTANTE: LEER DETENIDA...


lang:es score:29 filesize: 2.05 M page\_count: 12 document date: 2024-05-01



[pdf]

Microsoft Office Anwender Covered equipment letter ARTIKA FOR LIVING INC FM BE5C 2AUHG 2AUHGFMBE5C fm be5c


Covered Equipment Attestation Letter For Certification Service in the USA Federal Communication Com ... es 47 C.F.R. we attest as follows for the product listed below: FCC ID 2AUHG-FM-BE5C Model name **FM-BE5C-BL**, FM-BE5C-XXXXXX We, applicant Company Name: ARTIKA FOR LIVING INC Address: 1756 50th a... lang:en score:28 filesize: 193.17 K page\_count: 1 document date: 2024-07-12

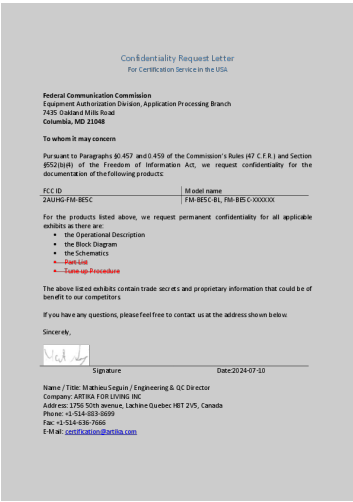

[pdf] Confidentiality Request Letter

Microsoft Office Anwender Confidentiality request letter ARTIKA FOR LIVING INC FM BE5C 2AUHG 2AUHGFMBE5C fm be5c

Confidentiality Request Letter For Certification Service in the USA Federal Communication Commissio ... confidentiality for the documentation of the following products: FCC ID 2AUHG-FM-BE5C Model name **FM-BE5C-BL**, FM-BE5C-XXXXXX For the products listed above, we request permanent confidentiality for ... lang:en score:27 filesize: 184.21 K page\_count: 1 document date: 2024-07-12

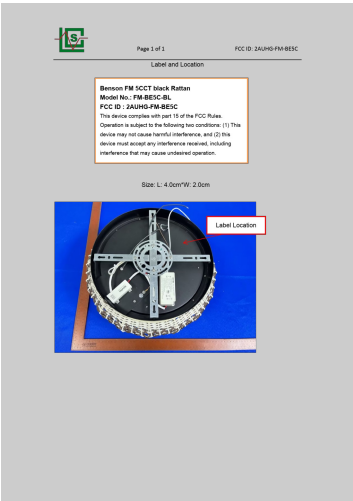

[pdf] Label

Administrator Label and label location ARTIKA FOR LIVING INC FM BE5C 2AUHG 2AUHGFMBE5C fm be5c

Page 1 of 1 Label and Location FCC ID: 2AUHG-FM-BE5C Benson FM 5CCT black Rattan Model No.: **FM-BE5C-BL** FCC ID : 2AUHG-FM-BE5C This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: 1 This device may not cause harmful interference, and 2 this d... lang:en score:20 filesize: 312.68 K page\_count: 1 document date: 2024-06-28