

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [ALLPOWERS](#) /

› [ALLPOWERS R1500 Portable Power Station User Manual](#)

## ALLPOWERS R1500

# ALLPOWERS R1500 Portable Power Station User Manual

Model: AP-SS-010-CA

## 1. INTRODUCTION

---

Thank you for choosing the ALLPOWERS R1500 Portable Power Station. This manual provides essential information for the safe and efficient operation, maintenance, and troubleshooting of your device. Please read this manual thoroughly before use and retain it for future reference.

The ALLPOWERS R1500 is a versatile 1152Wh LiFePO4 battery backup system designed to provide reliable power for various applications, including camping, emergency situations, RV travel, and home use. It features an Uninterruptible Power Supply (UPS) function and multiple charging and output options.

## 2. SAFETY INSTRUCTIONS

---

To ensure safe operation, always follow these guidelines:

- Do not disassemble, repair, or modify the unit. Incorrect assembly may cause fire, explosion, or injury.
- Do not expose the unit to fire or extreme temperatures (above 60°C/140°F).
- Do not use or store the unit in a bathroom or in areas exposed to water or rain.
- Do not use the unit if it is damaged or has been modified.
- Keep the unit away from children and pets.
- Ensure proper ventilation during use and charging. Do not block ventilation openings.
- Use only approved accessories and charging cables.
- Avoid dropping, impacting, or subjecting the unit to strong vibrations.
- In case of fire, use a dry powder fire extinguisher.

### 3. PACKAGE CONTENTS

---

Verify that all items are present in your package:

- 1 x ALLPOWERS R1500 Portable Power Station
- 1 x AC Charging Cable
- 1 x User Manual

### 4. PRODUCT OVERVIEW

---

The ALLPOWERS R1500 is equipped with various input and output ports to meet diverse power needs. Familiarize yourself with the layout and functions of the device.



Image: Front view of the ALLPOWERS R1500 Portable Power Station, showing the main display, DC output, USB ports, and AC outlets.

#### 4.1 Ports and Display

- **DC Output:** 12V/10A car cigarette lighter port.
- **USB-A Outputs:** Two 18W fast charging ports.

- **USB-C Outputs:** Two 100W ports.
- **AC Outputs:** Four 110V 1800W (peak 3000W) pure sine wave outlets.
- **Wireless Chargers:** Two 15W wireless charging pads on top.
- **Display Screen:** Shows battery level, input/output wattage, and operational status.

# 11 Outlets Power Simultaneously

4 2 2 1 2  
 110V 1800W AC 36W USB-A 100W USB-C 120W Car Port 15W Wireless Charger



Image: The ALLPOWERS R1500 highlighting its 11 output ports, including 4 AC, 2 USB-A, 2 USB-C, 1 car port, and 2 wireless chargers. The image also notes IP44 waterproof and dustproof cover for protection.

## 5. SETUP

### 5.1 Initial Charging

Before first use, fully charge the ALLPOWERS R1500. This ensures optimal battery performance and calibration.

1. Connect the provided AC charging cable to the R1500's AC input port.
2. Plug the other end into a standard wall outlet.
3. The display will indicate charging status. Charge until the battery indicator shows 100%.

## 5.2 Placement

Place the power station on a stable, flat surface. Ensure adequate space around the unit for proper ventilation to prevent overheating.

## 6. OPERATING INSTRUCTIONS

---

### 6.1 Charging the R1500

The R1500 supports multiple charging methods:

- **AC Wall Outlet:** Connect the AC charging cable. The R1500 can charge from 0-80% in approximately 40 minutes with a 1500W max input.
- **Solar Panels:** Connect compatible solar panels (up to 650W max input) to the R1500's solar input port. The integrated MPPT charge controller optimizes solar charging efficiency.
- **Car Charger:** Use a 12V/24V car charger to charge the unit from your vehicle.

# 0-100% in 40 Mins



AC Input  
1500W Max



Solar Input  
650W Max



Car Charger  
Support 12/24V



Image: Illustration showing the ALLPOWERS R1500 being charged via AC wall outlet, with icons indicating support for AC input (1500W Max), Solar Input (650W Max), and Car Charger (12V/24V).

## 6.2 Discharging and Using Outputs

To use the R1500 to power your devices:

1. Press the main power button to turn on the unit.
2. Press the respective output button (AC, DC, USB) to activate the desired output ports.
3. Connect your devices to the appropriate ports.
4. For wireless charging, place compatible devices on the wireless charging pads.

# Reliable Huge Power

1800W/1152Wh



Refrigerator(120W)

7.7 Hrs



Juicer(400W)

2.4 Hrs



Television(100W)

9.2 Hrs



Toaster(600W)

1.6 Hrs



Image: The ALLPOWERS R1500 powering kitchen appliances, demonstrating its 1800W/1152Wh capacity. Examples include a refrigerator (120W for 7.7 hrs), juicer (400W for 2.4 hrs), television (100W for 9.2 hrs), and toaster (600W for 1.6 hrs).

## 6.3 UPS Function

The R1500 features an Uninterruptible Power Supply (UPS) function. When connected to a wall outlet and devices are plugged into its AC outputs, the R1500 can automatically switch to battery power within 15 milliseconds during a power outage. This protects sensitive electronics from data loss or damage.



# UPS Battery Backup

ALLPOWERS R1500 can providing emergency power to your essentials in 15 ms



Image: A person opening a refrigerator, with the ALLPOWERS R1500 connected to it, illustrating its UPS battery backup capability to provide emergency power to essentials.

## 6.4 Eco Mode

The R1500 includes an Eco mode that allows the unit to shut down at a fixed time to conserve power when not in use or when output is below a certain threshold.

## 6.5 App Control

The ALLPOWERS R1500 can be controlled and monitored via a mobile application, connecting through Bluetooth or Wi-Fi. This allows for customized AC charging speed, control of AC or DC output, and checking power status remotely.

# ALLPOWERS in Your Hands



Customized AC Charging Speed



Switching Hertz



Control AC or DC Output




ON/OFF Eco Mode



Check Power Status Anywhere



Connect via Bluetooth or Wi-Fi

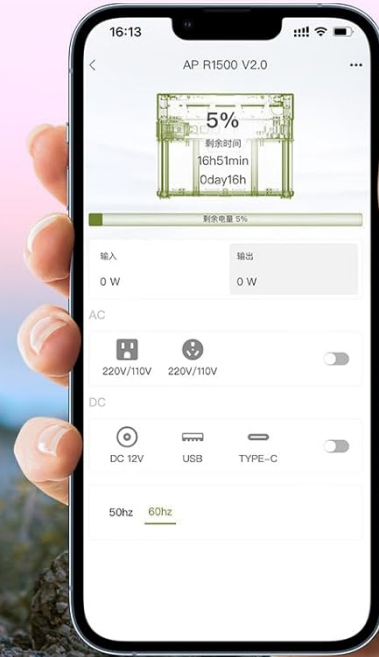

Download the **ALLPOWERS** App



Download on the  
**App Store**



GET IT ON  
**Google Play**

Image: A hand holding a smartphone displaying the ALLPOWERS app interface, with the R1500 power station in the background. The image highlights features like customized AC charging speed, switching hertz, AC/DC output control, Eco mode, power status check, and Bluetooth/Wi-Fi connectivity.

## 7. MAINTENANCE

### 7.1 Battery Lifespan

The R1500 utilizes a LiFePO<sub>4</sub> battery, known for its long lifespan. The maximum battery capacity remains above 80% after 3500 charge cycles and above 50% after 6500 cycles. This means the R1500 can be used for over 10 years with daily charging and discharging.





Image: An illustration emphasizing the LiFePO4 battery's longevity, stating '3500+ Cycles' and 'Last Safely for 10+ Years'. The image shows a person working on a laptop with the R1500 nearby, and another R1500 unit on a desk.

## 7.2 Storage

When storing the R1500 for extended periods, ensure it is charged to approximately 50-80% and stored in a cool, dry place away from direct sunlight and extreme temperatures. Recharge the unit every 3-6 months to maintain battery health.

## 7.3 Cleaning

Clean the exterior of the unit with a soft, dry cloth. Do not use abrasive cleaners or solvents. Keep the ventilation openings free of dust and debris.

## 7.4 Battery Management System (BMS)

The R1500 features an advanced BMS that monitors voltage, current, and temperature to ensure the safety and longevity of the battery under all operating conditions.

# Quiet Station, Comfortable Life



Image: A person sleeping in a tent with the ALLPOWERS R1500 nearby, illustrating its quiet operation. A bar graph shows noise levels at different power outputs: 0dB (OFF), 43dB (600W), 45dB (1000W), 52dB (1450W), and 55dB (1800W). The text notes that measurements are taken 1 meter from the equipment.

## 8. TROUBLESHOOTING

If you encounter issues with your ALLPOWERS R1500, refer to the following common troubleshooting steps:

- **Unit Not Turning On:** Ensure the battery is charged. If not, connect to an AC outlet for charging.
- **No Output from Ports:** Verify that the specific output (AC, DC, USB) is activated by pressing its respective button. Check if the device connected requires more power than the R1500 can supply.
- **Charging Issues:** Ensure charging cables are securely connected. Check if the power source is active. If using solar, ensure panels are in direct sunlight and correctly oriented.
- **Overload Protection:** If the unit shuts down unexpectedly, it may be due to an overload. Disconnect some

devices and restart the unit.

- **Display Errors:** If the display shows an error code, try restarting the unit. If the error persists, contact customer support.

## 9. SPECIFICATIONS







Feature	Specification
Model Name	AP-SS-010-CA
Battery Type	LiFePO4
Capacity	1152Wh
AC Output	4 x 110V, 1800W (Pure Sine Wave, Peak 3000W)
USB-A Output	2 x 18W
USB-C Output	2 x 100W
Car Cigarette Lighter Output	1 x 12V/10A
Wireless Charging	2 x 15W
AC Input (Max)	1500W
Solar Input (Max)	650W (MPPT)
UPS Switching Time	15ms
Dimensions	12.28 x 10.43 x 16.25 inches
Item Weight	36.8 pounds

## 10. WARRANTY AND SUPPORT

The ALLPOWERS R1500 Portable Power Station comes with a **6-year warranty**, providing peace of mind for your investment.

For technical support, warranty claims, or any questions regarding your product, please refer to the contact information provided on the ALLPOWERS official website or your purchase documentation. Always provide your model number (AP-SS-010-CA) and proof of purchase when seeking support.

## Related Documents - R1500

	<p><a href="#">ALLPOWERS R1500 Portable Power Station: 1800W Solar Generator User Manual</a></p> <p>Comprehensive user manual for the ALLPOWERS R1500 portable power station, featuring 1800W output, 1152Wh LiFePO4 battery, and solar charging capabilities. Learn about setup, operation, safety, and specifications.</p>
	<p><a href="#">ALLPOWERS R1500 Portable Power Station User Manual</a></p> <p>Comprehensive user guide for the ALLPOWERS R1500 portable power station, covering safety, specifications, usage, FAQs, troubleshooting, and package contents. Includes multilingual support.</p>
	<p><a href="#">ALLPOWERS R1500 Portable Power Station User Manual: Specs, Operation, Safety &amp; FAQ</a></p> <p>Comprehensive guide for the ALLPOWERS R1500 Portable Power Station. Covers safety instructions, detailed specifications, user operations for AC/solar charging, UPS function, app control, troubleshooting, and FAQs.</p>
	<p><a href="#">ALLPOWERS R1500 Portable Power Station User Manual</a></p> <p>Comprehensive user manual for the ALLPOWERS R1500 Portable Power Station, covering safety instructions, specifications, user guide, troubleshooting, and FAQs. Learn about AC charging, solar charging, UPS function, and app control.</p>
	<p><a href="#">ALLPOWERS R3500 Power Station User Guide   Portable Solar Generator</a></p> <p>Comprehensive user guide for the ALLPOWERS R3500 portable power station and solar generator. Learn about features, specifications, safe operation, and maintenance for reliable backup power.</p>
	<p><a href="#">ALLPOWERS S300 V2.0 Portable Power Station User Manual &amp; Guide</a></p> <p>Detailed user manual for the ALLPOWERS S300 V2.0 Portable Power Station (AP-SS-005). Learn about features, operation, charging, specifications, safety, and maintenance for reliable backup power.</p>


## Documents - ALLPOWERS – R1500



[ALLPOWERS R1500 Portable Power Station User Manual: Specs, Operation, Safety & FAQ](#)

Comprehensive guide for the ALLPOWERS R1500 Portable Power Station. Covers safety instructions, detailed specifications, user operations for AC/solar charging, UPS function, app control, troubleshooting, and FAQs.

lang:en score:50 filesize: 2.87 M page\_count: 1 document date: 2023-10-12



[ALLPOWERS R1500 Portable Power Station User Manual](#)

Comprehensive user guide for the ALLPOWERS R1500 portable power station, covering safety, specifications, usage, FAQs, troubleshooting, and package contents. Includes multilingual support.

lang:en score:46 filesize: 2.87 M page\_count: 1 document date: 2023-10-12





[ALLPOWERS R1500 LITE Portable Power Station User Manual](#)

User manual for the ALLPOWERS R1500 LITE portable power station, detailing its features, specifications, ports, battery information, and certifications.

lang:de score:36 filesize: 3.04 M page\_count: 1 document date: 2025-07-03



[ALLPOWERS R1500 Portable Power Station User Manual](#)

Comprehensive user manual for the ALLPOWERS R1500 Portable Power Station, covering safety instructions, specifications, user guide, troubleshooting, and FAQs. Learn about its features, charging methods, UPS function, and app connectivity.

lang:es score:34 filesize: 6.76 M page\_count: 1 document date: 2024-01-18

[\[pdf\] Frequently Asked Questions](#)

YPJSS0042 AP SS 010 R1500 V3 Administrator Manuale ItalianoManuali utenteR1500 Italianocdn shopify s files 1 0742 0887 0690 Italiano v 1722505673 |||



180mm 140mm **R1500** V3.0 Portable Power Station Model:**R1500** CONTENTS 1. Istruzioni di sicurezza 2. Specifiche 3. Guida per l'utente 3.1 Introduzione all'aspetto del prodotto 3.2 Introduzione di Display Touch LCONS 3.3 ac di ricarica 3.4 Carica solare 3.5 Batteria extra intelligente 3.6 Funzione U...

lang:it score:32 filesize: 6.66 M page\_count: 1 document date: 2024-01-17



[ALLPOWERS R1500 LITE Portable Power Station User Manual](#)

This user manual provides comprehensive details on the ALLPOWERS R1500 LITE Portable Power Station, covering safety instructions, technical specifications, operating procedures, app integration, frequently asked questions, and troubleshooting guidance for optimal performance and safe usage.

lang:en score:32 filesize: 2.1 M page\_count: 1 document date: 2025-06-06


[\[pdf\] User Manual Instructions Frequently Asked Questions Troubleshooting Guide Specifications Guide](#)

YPJSS0060 AP SS 010 R1500 V3 1 Administrator ALLPOWERS R1500LITE 1056Wh 1600 ALLPOWERS AP LITE V1 Ocdn shopify s files 0677 3843 5899 v 1750154107 |||



180mm 140mm **R1500** LITE V1.0 Portable Power Station Model:**R1500** LITE CONTENTS 1. Safety Instructions 2. Specifications 3. User Guide 3.1 Product Appearance Introduction 3.2 Introduction of Display Touch Icons 3.3 AC Charging 3.4 Solar Charging 3.5 UPS Function Uninterruptible Power Supply 3.6 ...

lang:en score:31 filesize: 2.1 M page\_count: 1 document date: 2025-06-17

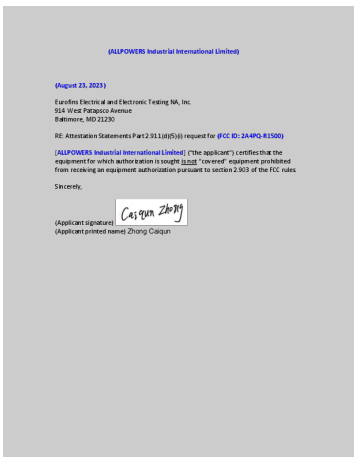


[\[pdf\]](#)

Please produce a letter on your company letterhead with the following information Attestation Statements ALLPOWERS Industrial International Limited R1500 Portable Power Station 2A4PQ 2A4PQR1500 r1500 ALLPOWERS Industrial International Limited August 23, 2023 Eurofins Electrical and Electronic Testing NA, Inc. 914 West Patapsco Avenue Baltimore, MD 21230 RE: Attestation Statements Part 2.911 d 5 i request for FCC ID: 2A4PQ-**R1500** ALLPOWERS Industrial International Limited the applican...

lang:en score:31 filesize: 192.76 K page\_count: 2 document date: 2023-08-23



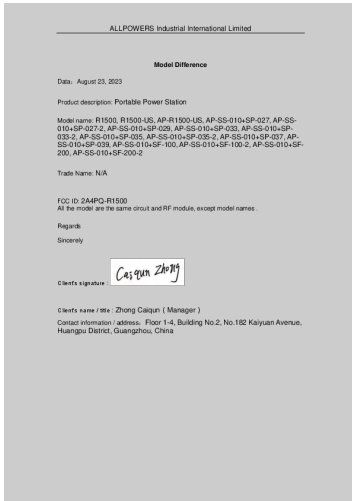

[ALLPOWERS Portable Power Station Model Differences and FCC ID 2A4PQ-R1500](#)

Official document from ALLPOWERS Industrial International Limited detailing model differences for their Portable Power Station line, including R1500 and AP-SS-010 series. Confirms shared circuitry and RF module across all listed models, with FCC ID 2A4PQ-R1500.

lang:tl score:31 filesize: 177.15 K page\_count: 1 document date: 2023-08-23



[ALLPOWERS R1500 Portable Power Station User Manual](#)

Comprehensive user manual for the ALLPOWERS R1500 Portable Power Station, detailing specifications, safety instructions, usage guides, app connectivity, troubleshooting, and package contents.


lang:fr score:30 filesize: 6.77 M page\_count: 1 document date: 2024-01-18



[ALLPOWERS R1500 Portable Power Station User Manual](#)

Comprehensive user manual for the ALLPOWERS R1500 Portable Power Station, covering safety instructions, detailed specifications, user guide for operation, charging, UPS function, APP control, troubleshooting, and frequently asked questions.

lang:en score:30 filesize: 2.87 M page\_count: 1 document date: 2023-09-22

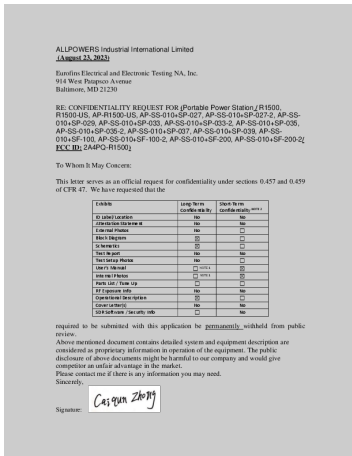

[\[pdf\] Confidentiality Request Letter](#)

Please produce a letter on your company letterhead with the following information Administrator Long short term Confidentiality Letter ALLPOWERS Industrial International Limited R1500 Portable Power Station 2A4PQ 2A4PQR1500 r1500

ALLPOWERS Industrial International Limited August 23, 2023 Eurofins Electrical and Electronic Testing NA, Inc. 914 West Patapsco Avenue Baltimore, MD 21230 RE: CONFIDENTIALITY REQUEST FOR Portable Power Station / R1500, R1500-US, AP-R1500-US, AP-SS-010 SP-027, AP-SS-010 SP-027-2, AP-SS010 SP-029...

lang:en score:29 filesize: 141.16 K page\_count: 2 document date: 2023-08-23



[\[pdf\] User Manual Instructions Frequently Asked Questions Troubleshooting Guide Specifications Guide](#)

AP R1500 EN 20230810 Administrator 140mm 180mm ManoMano This can use ALLPOWERS Smart Extra Battery for capacity expansion and support the superposition of 2 battery packs at most When using this product 225694d71c9aa57017f103ff1458e5b38a7fbf2d cdn manomano pim dam img 7976 99843014 |||

180mm 140mm Portable Power Station Model:R1500 CONTENTS 1. Safety Instructions 2. Specifications 3. User Guide 3.1 Product Appearance Introduction 3.2 Introduction of Display Touch Icons 3.3 AC Charging 3.4 Solar Charging 3.5 Smart Extra Battery 3.6 UPS Function Uninterruptible Power Supply 3....

lang:en score:28 filesize: 8.91 M page\_count: 1 document date: 2023-12-04

[\[pdf\]](#) User Manual Frequently Asked Questions

AP R1500 20230810 DE Administrator Portable Power Station ManoMano Dieser kann ALLPOWERS Smart Extra Battery zur Kapazitätserweiterung verwenden und die Überlagerung von maximal 2 Akkus unterstützen Wenn Sie 6f865e1228631f9832ab738f61fed4ff9d851cda cdn manomano pim dam img 7585 99795522 |||



Portable Power Station Model:**R1500** INHALT 1.Sicherheitshinweise 2.Spezifikationen 3.Benutzerfhrung 3.1 Produktdetails 3.2 LCD Anzeige 3.3 AC Ladung 3.4 Solar Ladung 3.5 Intelligente Zusatzbatterie 3.6 UPS Funktion unterbrechungsfreie Stromversorgung 3.7 APP Bedienungsanleitung 4. FAQ 5. Fehlerbeh...

lang:de score:28 filesize: 9.35 M page\_count: 1 document date: 2023-12-22

[ALLPOWERS R1500 Portable Power Station: 1800W Solar Generator User Manual](#)

Comprehensive user manual for the ALLPOWERS R1500 portable power station, featuring 1800W output, 1152Wh LiFePO4 battery, and solar charging capabilities. Learn about setup, operation, safety, and specifications.



lang:de score:27 filesize: 6.73 M page\_count: 1 document date: 2024-09-12

[\[pdf\]](#) User Manual Frequently Asked Questions

AP R1500 20230810 DE Administrator Portable Power Station6f865e1228631f9832ab738f61fed4ff9d851cdacdn manomano pim dam img 7977 99994895 6f865e1228631f9832ab738f61fed4ff9d851cda |||



Portable Power Station Model:**R1500** INHALT 1.Sicherheitshinweise 2.Spezifikationen 3.Benutzerfhrung 3.1 Produktdetails 3.2 LCD Anzeige 3.3 AC Ladung 3.4 Solar Ladung 3.5 Intelligente Zusatzbatterie 3.6 UPS Funktion unterbrechungsfreie Stromversorgung 3.7 APP Bedienungsanleitung 4. FAQ 5. Fehlerbeh...

lang:de score:25 filesize: 9.35 M page\_count: 1 document date: 2023-12-22

[ALLPOWERS R1500 Portable Power Station User Manual](#)

Comprehensive guide for the ALLPOWERS R1500 Portable Power Station, covering safety instructions, specifications, usage, troubleshooting, and package contents. Learn how to operate and maintain your R1500.



lang:de score:23 filesize: 3.92 M page\_count: 2 document date: 2023-08-23


[\[pdf\]](#) Agent Authorization

Date Administrator Agent Authorization ALLPOWERS Industrial International Limited R1500 Portable Power Station 2A4PQ 2A4PQR1500 r1500

ALLPOWERS Industrial International Limited August 23, 2023 Eurofins Electrical and Electronic Testing NA, Inc. 914 West Patapsco Avenue Baltimore, MD 21230 RE:

LETTER OF AGENT AUTHORIZATION To Whom It May Concern: We, the undersigned, hereby authorize Shenzhen CTB Testing Technology Co., Ltd. to...

lang:en score:22 filesize: 27.75 K page\_count: 1 document date: 2023-08-23

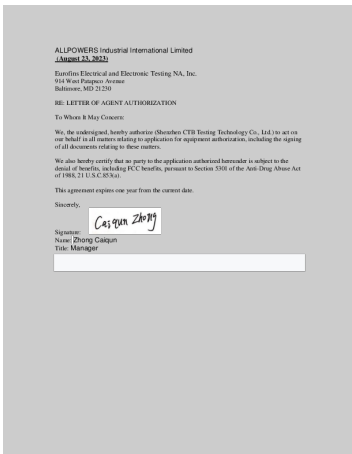




[pdf] Label

Admin ID Label Location Info ALLPOWERS Industrial International Limited R1500 Portable Power Station 2A4PQ 2A4PQR1500 r1500

Label Location HVIN: **R1500** IC: 29293-**R1500** FCC ID: 2A4PQ-**R1500** This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: 1 This device may not cause harmful interference, and 2 this device must accept any interference received, including interferen...

lang:en score:22 filesize: 69.67 K page\_count: 1 document date: 2023-08-28

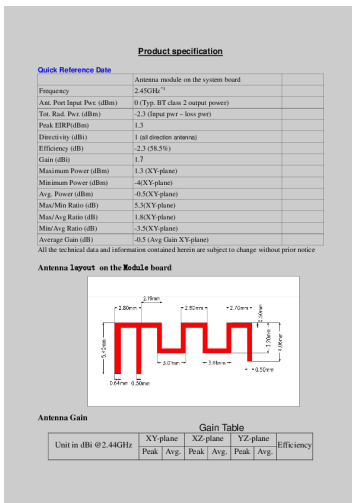

[pdf] Specifications Declaration of Conformity Diagram Test Report

Microsoft Word Antenna Product Specification 3 doc Administrator ATN Test Report ALLPOWERS Industrial International Limited R1500 Portable Power Station 2A4PQ 2A4PQR1500 r1500

Product specification Quick Reference Date Frequency Antenna module on the system board 2.45GHz\*1 Ant. Port Input Pwr. dBm 0 Typ. BT class 2 output power Tot. Rad. Pwr. dBm -2.3 Input pwr loss pwr Peak EIRP dBm 1.3 Directivity dBi 1 all direction antenna Efficiency dB -2.3...


lang:en score:21 filesize: 725.88 K page\_count: 6 document date: 2023-08-23



[pdf] ALLPOWERS R1500 LITE Portable Power Station User Manual

Comprehensive user manual for the ALLPOWERS R1500 LITE portable power station, covering features, operation, safety, troubleshooting, and specifications.

lang:en score:20 filesize: 9.29 M page\_count: 1 document date: 2025-06-04

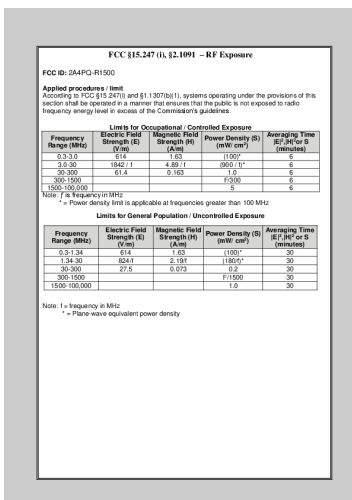

[pdf] SAR Rating

tom RF Exposure Info ALLPOWERS Industrial International Limited R1500 Portable Power Station 2A4PQ 2A4PQR1500 r1500

FCC 15.247 i , 2.1091 RF Exposure FCC ID: 2A4PQ-**R1500** Applied procedures / limit According to FCC 15.247 i and 1.1307 b 1 , systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess ...

lang:en score:20 filesize: 220.38 K page\_count: 2 document date: 2023-08-23


[pdf]

YPJSS0042 AP SS 010 R1500 V3 20240425 Administrator ALLPOWERS R1500  
1152Wh 1800W ALLPOWERS YPJSS0042 V3 20240425cdn shopify s files 1 0677 3843 5899 v  
1714032695 |||



3.7.3 Wi-Fi **R1500**Wi-Fi Wi-FiUSB Wi-FiON Wi-FiALLPOWERSWIFI **R1500** Wi-Fi  
WIFI support allpowers.com ...


lang:en score:20 filesize: 2.72 M page\_count: 1 document date: 2024-04-25

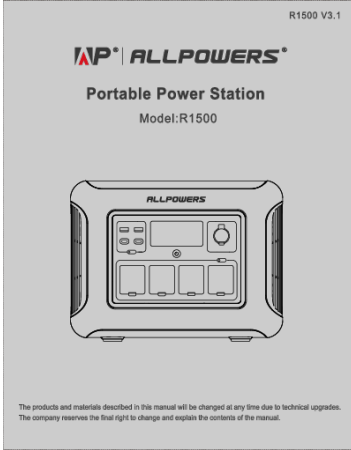

[ALLPOWERS R1500 Portable Power Station User Manual](#)

Comprehensive user manual for the ALLPOWERS R1500 Portable Power Station, covering safety instructions, specifications, user guide, troubleshooting, and FAQs. Learn about AC charging, solar charging, UPS function, and app control.

lang:en score:19 filesize: 3.15 M page\_count: 32 document date: 2024-05-31

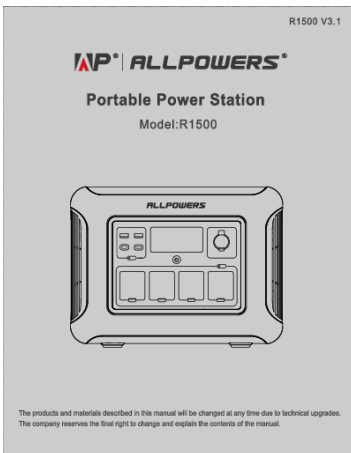


[pdf] User Manual

AP SS 010 R1500 User Manual V3 1 Administrator BenutzerhandbuchBenutzerhandbücher  
ALLPOWERS DeutschlandR1500 Power Station V20230712cdn shopify s files 0663 7371 4188  
V20230712 v 1723797768 |||


...

lang:en score:19 filesize: 3.15 M page\_count: 32 document date: 2024-05-31

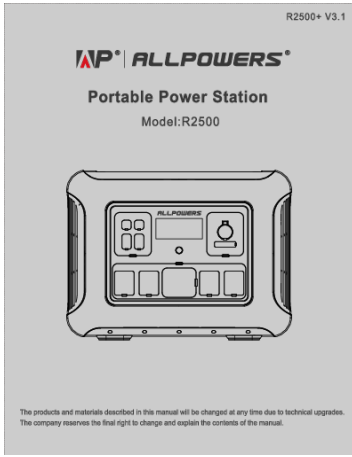

[\[pdf\]](#) User Manual

AP SS 010PRO R2500 user manual V3 1 Administrator Download User Manual ALLPOWERS Home Backup Power Station 2016Wh 2500W UK YPJSS0051 0 20231117 v 8962309532585215000 uk iallpowers cdn shop files R1500 Portable 1152Wh 1800W United Kingdom de |||  
 ...  
 lang:en score:19 filesize: 3.46 M page\_count: 32 document date: 2024-05-31

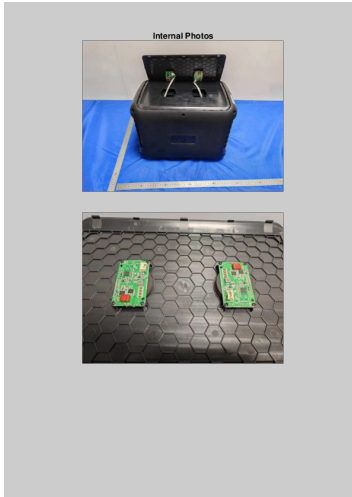

[\[pdf\]](#) Product Photos Teardown

55013 Jade Internal Photos ALLPOWERS Industrial International Limited R1500 2A4PQ 2A4PQR1500 r1500  
 Internal Photos Wireless charging BT/WIFI ...  
 lang:en score:14 filesize: 3.06 M page\_count: 14 document date: 2023-08-23

Attestation Statements

(August 29, 2023)

TD: Federal Communications Commission  
 Antennas and Radiation Division  
 3120 Chillum Blvd NE  
 Columbia, MD 21046, USA

HL Attestation Statements Part 2 (301.301) request for (ECC ID: 2A4PQ-R1500)

**[ALLPOWERS Industrial International Limited]**, the undersigned hereby certifies that the BATTERY MANUFACTURED by us as a design in U.S. agent for service of process (ALLPOWERS Industrial International Limited) except to maintain an agent for no less than one year after the grantee has terminated all marketing and inspection or the conclusion of any Commission proceeding involving the equipment.

**[US agent ALLPOWERS Industrial International Limited]** agrees to maintain an agent for service of process, provided an agent for no less than one year after the grantee has terminated all marketing and inspection or the conclusion of any Commission-related proceeding involving the equipment.

**Applicant information:**  
 Company name: ALLPOWERS Industrial International Limited  
 Contact Name: Zhong Chong  
 Address: Floor 3, A Building No.2, No.382 Kailash Avenue, Huangpu District, Guangzhou, China  
 Telephone No.: 8538294502  
 E-mail: zhouyuzi@rongbao.com

**U.S. Agent Information:**  
 Company Name: CENTRAL ASIAN INTERNATIONAL LLC  
 Address: 25545 CRENSHAW BLVD STE 106 Torrance, CA 90505  
 Contact Name: Yueqing Zhu  
 Telephone No.: 7147595912  
 E-mail: yueqingzhu@centralasianintl.com  
 HWT: 1023481811

[\[pdf\]](#)

US agent ALLPOWERS Industrial International Limited R1500 Portable Power Station 2A4PQ 2A4PQR1500 r1500  
 ...  
 lang:en score:14 filesize: 47.94 K page\_count: 1 document date: 2023-08-23

Applicant Signature: *Chong Zhong* Agent Signature: *Yueqing Zhu*  
 Applicant printed name: Zhong Chong Agent printed name: Yueqing Zhu






[\[pdf\]](#) Product Photos

55013 Jade External Photos ALLPOWERS Industrial International Limited R1500 Portable Power Station 2A4PQ 2A4PQR1500 r1500

External Photos ...

lang:en score:14 filesize: 319.4 K page\_count: 3 document date: 2023-08-23

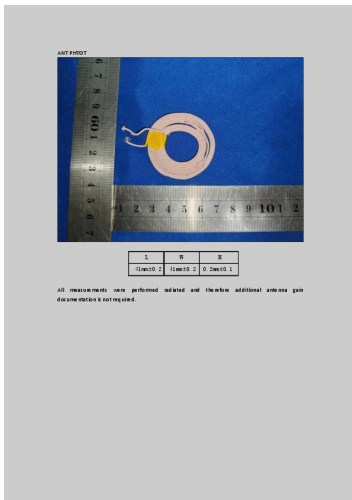


[\[pdf\]](#) Documentation Test Report

Administrator ATN Test Report ALLPOWERS Industrial International Limited R1500 Portable Power Station 2A4PQ 2A4PQR1500 r1500

ANT PHTOT L W H 41mm0.2 41mm0.2 0.2mm0.1 All measurements were performed radiated and therefore additional antenna gain documentation is not required. ...

lang:en score:14 filesize: 305.86 K page\_count: 1 document date: 2023-08-28

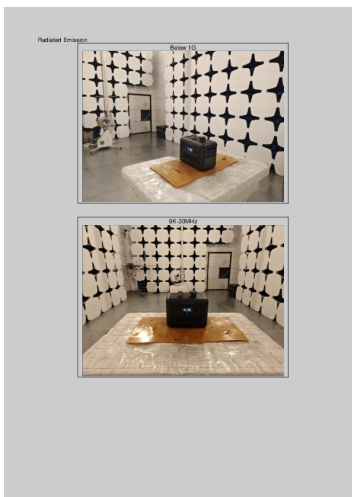

[\[pdf\]](#) Product Photos

55013 Jade Test Setup Photos Rev1 ALLPOWERS Industrial International Limited R1500 Portable Power Station 2A4PQ 2A4PQR1500 r1500

Radiated Emission Below 1G 9K-30MHz Radiated Emissions Above 1G Conducted emissions ...

lang:en score:13 filesize: 348.15 K page\_count: 2 document date: 2023-08-24




[pdf] SAR Rating

Measurement Report Kent RF Exposure Info ALLPOWERS Industrial International Limited R1500 Portable Power Station 2A4PQ 2A4PQR1500 r1500

...

lang:en score:13 filesize: 1.52 M page\_count: 7 document date: 2023-08-28

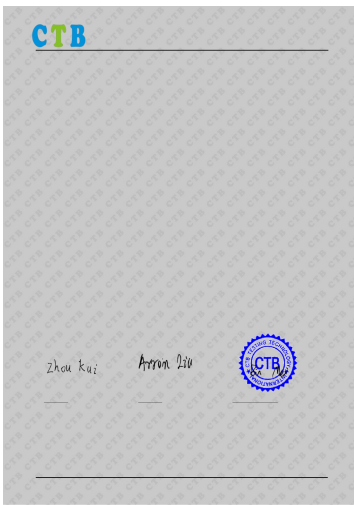


[pdf] Test Report

55013 Jade BCTC Test Report 1 ALLPOWERS Industrial International Limited R1500 Portable Power Station 2A4PQ 2A4PQR1500 r1500

...

lang:en score:13 filesize: 3.53 M page\_count: 54 document date: 2023-08-29

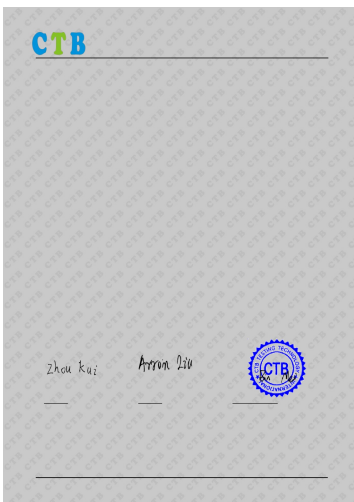

[pdf] Test Report

55013 Jade BCTC Test Report 2 ALLPOWERS Industrial International Limited R1500 Portable Power Station 2A4PQ 2A4PQR1500 r1500

...

lang:en score:13 filesize: 2.24 M page\_count: 35 document date: 2023-08-29




[\[pdf\]](#) Product Photos

55013 Jade Test Setup Photos DCD ALLPOWERS Industrial International Limited R1500 Portable Power Station 2A4PQ 2A4PQR1500 r1500

...

lang:en score:13 filesize: 210.62 K page\_count: 3 document date: 2023-08-23

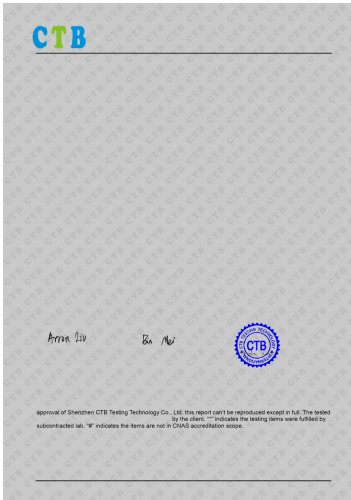

[\[pdf\]](#) Test Report

EMC TEST REPORT Ihf Test Report ALLPOWERS Industrial International Limited R1500 Portable Power Station 2A4PQ 2A4PQR1500 r1500

...

lang:en score:13 filesize: 1.67 M page\_count: 21 document date: 2023-08-24



[\[pdf\]](#)

YPJSS0077 AP B1000 V2 0 Administrator ALLPOWERS R1500 1152Wh 1800W ALLPOWERS B1000 B1000 V2 v 1732515404 cdn shopify s files 1 0677 3843 5899 |||

...

lang:en score:11 filesize: 5.17 M page\_count: 1 document date: 2024-11-25



[\[pdf\]](#)

YPJSS0077 AP B1000 V2 Administrator ALLPOWERS 1152Wh B1000 R1500 R2500 ALLPOWERS AP B1000 V2 0cdn shopify s files 1 0677 3843 5899 v 1724658306 |||

...

lang:en score:10 filesize: 5.32 M page\_count: 1 document date: 2024-08-26