Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

Rapoo 9320M

Rapoo 9320M Ultra Slim Multi-Device Wireless & Bluetooth Keyboard and Mouse Combo User Manual

1. Introduction

Thank you for choosing the Rapoo 9320M Ultra Slim Multi-Device Wireless and Bluetooth Keyboard and Mouse Combo. This product is designed for seamless multi-tasking across up to four devices, offering both 2.4GHz wireless and Bluetooth 5.0/4.0 connectivity. Its ultra-slim design, durable aluminum alloy base, and silent keys provide a comfortable and efficient user experience for both Windows and macOS environments.



Image 1.1: Multi-device connectivity overview, showing the keyboard and mouse connected to a laptop, smartphone, tablet, and desktop PC via Bluetooth and 2.4G wireless.

2. Package Contents

- Rapoo 9320M Ultra Slim Keyboard
- Rapoo Wireless Mouse
- USB Receiver (stored in the mouse battery compartment)
- 3 AAA Batteries (pre-installed or included for keyboard and mouse)
- Quick Start Guide (this manual)

3. Setup Instructions

3.1. Battery Installation

Ensure batteries are correctly installed in both the keyboard and mouse. The keyboard typically uses 2 AAA batteries, and the mouse uses 1 AAA battery. Open the battery compartment cover on the underside of each device and insert the batteries according to the polarity indicators (+/-).

3.2. 2.4GHz Wireless Connection

1. Locate the USB receiver, usually stored in the battery compartment of the mouse.
2. Plug the USB receiver into an available USB port on your computer.
3. Turn on the keyboard and mouse using their respective power switches (usually located on the underside).
4. The keyboard and mouse should automatically connect to your computer via the 2.4GHz channel. The keyboard's indicator light for the 2.4G channel (often labeled '1' or '2.4G') will illuminate briefly.

3.3. Bluetooth Connection (Up to 3 Devices)

The Rapoo 9320M supports connecting to up to three devices via Bluetooth.

1. **Activate Pairing Mode:** On the keyboard, press and hold one of the Bluetooth channel keys (e.g., **BT1**, **BT2**, or **BT3**) for approximately 3 seconds. The corresponding indicator light will start blinking rapidly, indicating it's in pairing mode.
2. **On Your Device:** Go to your device's Bluetooth settings (e.g., computer, tablet, smartphone).
3. **Search for Devices:** Enable Bluetooth and search for new devices. You should see "Rapoo 9320M" or a similar name appear in the list.
4. **Connect:** Select the keyboard from the list to pair. If prompted, enter the displayed code on the keyboard and press Enter.
5. **Mouse Pairing:** For the mouse, press and hold the Bluetooth pairing button (usually on the underside) until its indicator light blinks. Then, follow steps 2-4 on your device to pair the mouse.
6. Repeat these steps for other Bluetooth devices using different Bluetooth channel keys on the keyboard.

4. Operating Instructions

4.1. Switching Between Connected Devices

To switch between your connected devices, simply press the corresponding channel key on the keyboard:

- Press the **2.4G** key (or the key labeled '1' for 2.4G) to switch to the device connected via the USB receiver.
- Press **BT1** to switch to the first Bluetooth-connected device.
- Press **BT2** to switch to the second Bluetooth-connected device.
- Press **BT3** to switch to the third Bluetooth-connected device.

4.2. Windows and macOS Mode Switching

The keyboard supports both Windows and macOS layouts for optimal compatibility.

- Press **Fn + Q** to switch to macOS mode.
- Press **Fn + W** to switch to Windows mode.



Image 4.1: Keyboard layout highlighting the 'Q' (Mac) and 'W' (Win) keys used for operating system mode switching.

4.3. Multimedia Shortcut Keys

The function keys (F1-F12) on the keyboard double as multimedia and shortcut keys. To activate these functions, press the **Fn** key simultaneously with the desired function key.

- **Fn + F1:** Media Player
- **Fn + F2:** Volume Down
- **Fn + F3:** Volume Up
- **Fn + F4:** Mute
- **Fn + F5:** Previous Track
- **Fn + F6:** Next Track
- **Fn + F7:** Play/Pause
- **Fn + F8:** Stop
- **Fn + F9:** Home Page
- **Fn + F10:** Email
- **Fn + F11:** My Computer
- **Fn + F12:** Calculator



Image 4.2: Close-up of the keyboard's function row, illustrating the multimedia icons associated with F1-F12 keys.

4.4. Mouse DPI Adjustment

The mouse features an adjustable DPI (Dots Per Inch) setting, allowing you to change cursor sensitivity. Press the DPI button (usually located behind the scroll wheel) to cycle through available DPI levels (e.g., 800, 1000, 1200, 1600, 2400 DPI). The cursor speed will change with each press.

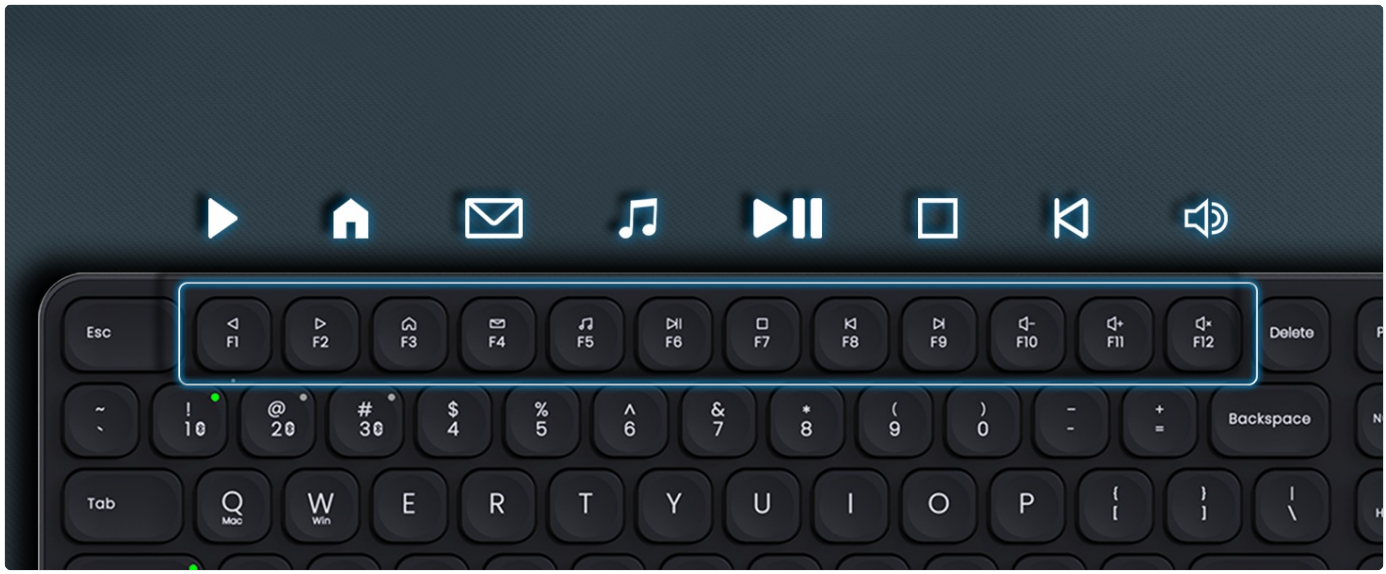


Image 4.3: Diagram showing the mouse and a dial indicating adjustable DPI settings from 800 to 2400.

4.5. LED Indicators

- **Channel Indicators:** Lights next to 2.4G/BT1/BT2/BT3 keys indicate the currently active connection. They blink during pairing.
- **Caps Lock Indicator:** A dedicated LED light illuminates when Caps Lock is active.
- **Low Battery Indicator:** Some models may have an LED that blinks or changes color to indicate low battery power.

5. Maintenance

- **Cleaning:** Use a soft, dry, lint-free cloth to clean the keyboard and mouse. For stubborn dirt, slightly dampen the cloth with water or a mild cleaning solution. Avoid excessive moisture.
- **Battery Replacement:** Replace batteries when performance degrades or the low battery indicator activates. Always use fresh, high-quality batteries of the specified type (AAA).
- **Storage:** When not in use for extended periods, turn off the keyboard and mouse to conserve battery life. Store in a cool, dry place.
- **Avoid Extreme Conditions:** Do not expose the devices to extreme temperatures, direct sunlight, or excessive humidity.

6. Troubleshooting

6.1. Keyboard/Mouse Not Responding

- **Check Batteries:** Ensure batteries are correctly installed and have sufficient charge. Replace if necessary.
- **Power On:** Verify that both the keyboard and mouse are switched on.
- **Correct Channel:** Ensure you have selected the correct connection channel (2.4G, BT1, BT2, BT3) for your device.
- **USB Receiver:** For 2.4GHz connection, ensure the USB receiver is securely plugged into a working USB port. Try a different USB port.
- **Bluetooth Re-pairing:** For Bluetooth connection, try re-pairing the keyboard/mouse with your device. Remove the device from your device's Bluetooth list and pair again.

- **Interference:** Move the keyboard/mouse closer to your computer and away from other wireless devices that might cause interference.

6.2. Lag or Disconnections

- **Distance:** Ensure the devices are within the effective operating range (up to 10 meters/30 feet).
- **Interference:** Other wireless devices (Wi-Fi routers, cordless phones) can cause interference. Try to minimize these.
- **Surface (Mouse):** For the mouse, ensure you are using it on a suitable, non-reflective surface.

6.3. Specific Keys Not Working

- **Cleanliness:** Check for any debris or foreign objects under the keycap.
- **Software Conflict:** Restart your computer to rule out any software-related issues.

7. Specifications

Feature	Description
Brand	Rapoo
Model	9320M
Connectivity Technology	Bluetooth 5.0/4.0, 2.4GHz Radio Frequency
Multi-Device Support	Up to 4 devices (1 x 2.4GHz, 3 x Bluetooth)
Keyboard Layout	QWERTY, 99 Keys
Special Features	Ultra-slim Aluminum Frame, Silent Keys, Ergonomic, Spillproof
Compatible Operating Systems	Windows, macOS, iOS, Android
Mouse Movement Detection	Optical
Mouse DPI	Adjustable 800-2400 DPI
Power Source	Battery Powered (AAA batteries included)
Item Weight	650 Grams (approximate)
Country of Origin	China

8. Warranty and Support

8.1. Warranty Information

The Rapoo 9320M Keyboard and Mouse Combo comes with a**3-year limited warranty** from the date of purchase. This warranty covers manufacturing defects in materials and workmanship under normal use. It does not cover damage caused by accident, abuse, misuse, natural disaster, or unauthorized modification.

8.2. Customer Support

For technical support, warranty claims, or further assistance, please contact your local Rapoo distributor or visit the official Rapoo website for contact information. Please have your product model number and proof of purchase ready when contacting support.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0DDZ63MNG

More documents and user manuals: **https://manuals.plus/**