



DOUK AUDIO SP102 Audio Selector Stereo Switcher for Amplifier Speaker Instruction Manual

[Home](#) » [Douk Audio](#) » DOUK AUDIO SP102 Audio Selector Stereo Switcher for Amplifier Speaker Instruction Manual 

Contents

- [1 DOUK AUDIO SP102 Audio Selector Stereo Switcher for Amplifier Speaker](#)
- [2 Introduction](#)
- [3 Warm tips](#)
 - [3.1 Step for use](#)
 - [3.2 Front and back panel](#)
 - [3.3 Parameters](#)
 - [3.4 Contact information](#)
- [4 Documents / Resources](#)
 - [4.1 References](#)
- [5 Related Posts](#)

DOUK AUDIO

DOUK AUDIO SP102 Audio Selector Stereo Switcher for Amplifier Speaker



Introduction

SP102 is a passive audio selector, convenient to compare the sound quality of 2 pair of different speakers or 2PCS amplifiers. Each channel can pass through power up to 200W, fully isolated design for all channels and the GND of each channel is independent, also with built-in protective loads for channels A&B, suitable for all types of amplifiers. Proper size with simple appearance, fashionable and durable, convenient for use in most situations.


Warm tips

1. Only 1 group of amplifier input or 1 group of speaker output at a time, not support 2 groups of them working in parallel at the same time.
2. When the toggle switch in OFF position, the connection between A&B channels and I/O channel will be disconnected, equivalent to mute, no sound will output.


Step for use

1. According to the connection
 1. CD I-IN-2-OUT, connect one amplifier to I/O input channel, then connect 2 pairs of speakers to A/B channel.
 2. IN-1-OUT, connect 2 pairs of amplifiers to A/B channel, then connect 1 pair of speaker to I/O output channel;
2. After correct connection, select A or B channel to compare different amplifier inputs or speakers output via toggle switch on the front panel.


Front and back panel

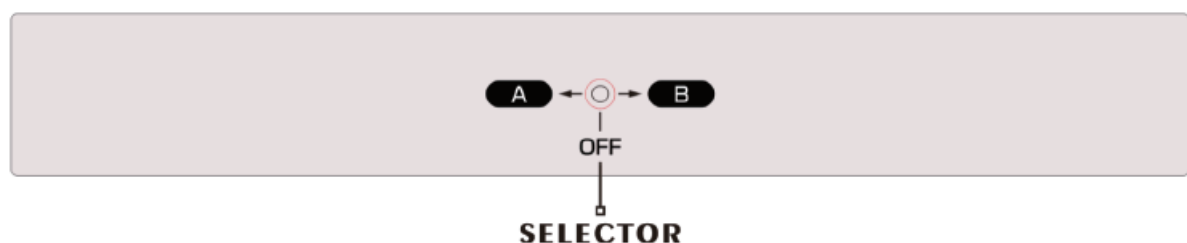

IN 2 OUT MODE

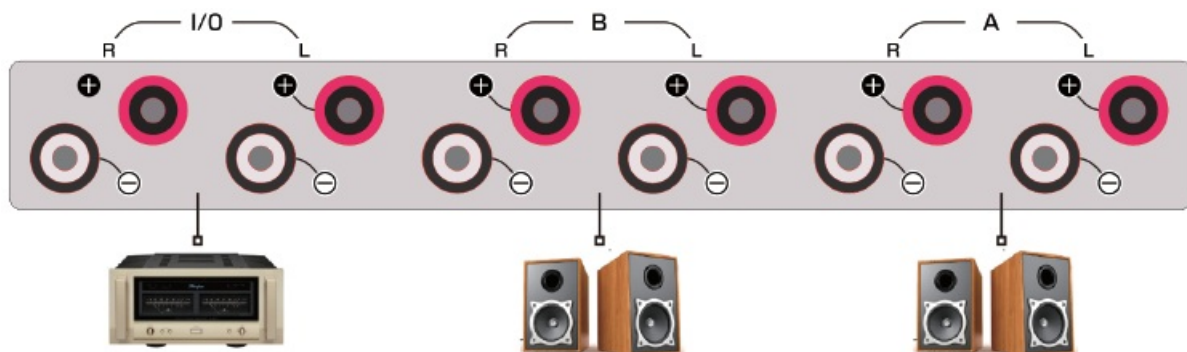

IN 1OUT MODE

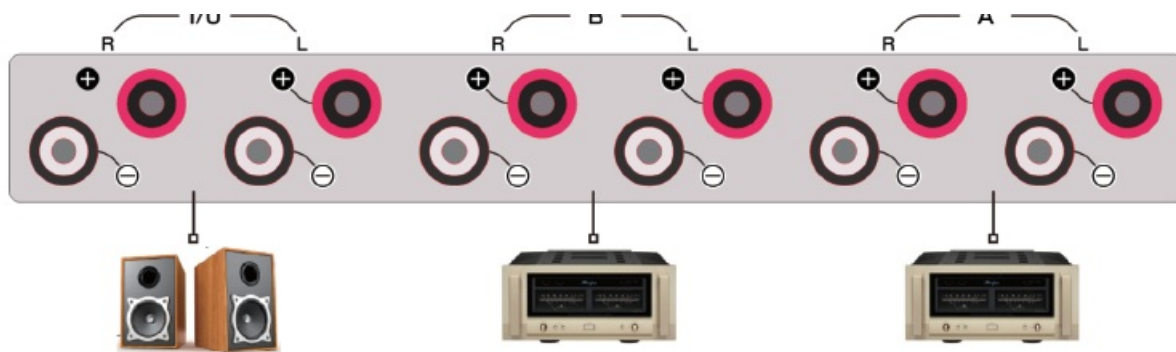

Parameters

- Brand: Douk Audio
- Model: SPI02
- Interface: banana speaker jacks
- Number of channel: 2 groups of A/B, 1 group of I/O
- Mute: support
- Working methods: 1-IN-2-OUT / 2-IN-1-OUT
- Power(max) support: 200W each channel
- Types of amplifier supported: all types (BTL, class A, class B, class D etc.) Dimensions(W*D*H):
242*108*33mm / 9.53*4.25*1.30in
- Net weight: 720g / 1.59lb
- Package weight: 1000g / 2.20lb

Contact information

- Website: www.doukaudio.com
- Email: nobsound@doukaudio.com
- WeChal/Whatsapp: +86-17704028602
- Address: Room 1329, Wang Cheng Building, Long Guan
- East Road, Long Hua District, Shen Zhen, Guang Dong, China, 518000

Documents / Resources



[DOUK AUDIO SP102 Audio Selector Stereo Switcher for Amplifier Speaker](#) [pdf]

Instruction Manual

SP102 Audio Selector Stereo Switcher for Amplifier Speaker, SP102, Audio Selector Stereo Switcher for Amplifier Speaker, Selector Stereo Switcher for Amplifier Speaker, Stereo Switcher for Amplifier Speaker, Switcher for Amplifier Speaker, Amplifier Speaker, Speaker

References

- [User Manual](#)