




Drayton LP822 Universal Dual Channel Programmer Instruction Manual

[Home](#) » [Drayton](#) » Drayton LP822 Universal Dual Channel Programmer Instruction Manual 

Drayton Lifestyle

LP822 Universal Dual Channel Programmer
Instruction Manual

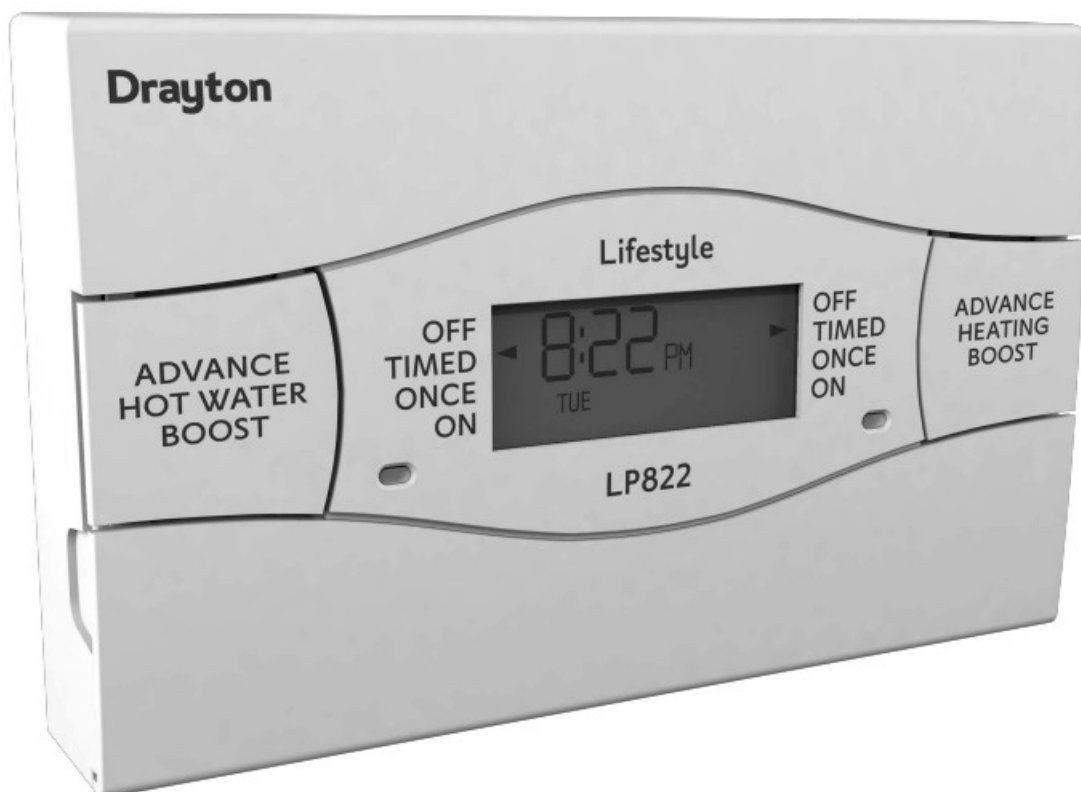

PLEASE NOTE: INSTALLATION MUST ONLY BE CARRIED OUT BY A QUALIFIED ELECTRICIAN OR HEATING ENGINEER.

MAKE SURE MAINS INPUT HAS A 3 AMP FUSE.

Contents

- [1 TECHNICAL DATA](#)
- [2 BEFORE INSTALLATION](#)
- [3 USING AN EXISTING WALL-PLATE](#)
- [4 FITTING A NEW WALL-PLATE](#)
- [5 WIRING THE TIMESWITCH WALL PLATE](#)
- [6 PREPARING TO PROGRAMME YOUR SYSTEM](#)
- [7 DAY-TO-DAY VARIATIONS](#)
- [8 THE 5/2 DAY PROGRAM](#)
- [9 SETTING THE CLOCK AND DATE](#)
- [10 SETTING THE DATE](#)
- [11 Documents / Resources](#)
 - [11.1 References](#)
- [12 Related Posts](#)

TECHNICAL DATA

LP241Si, LP522Si & LP722Si **PROGRAMMERS**

LP111Si & LP711Si **TIMESWITCHES**

Voltage	230V a.c. +10% – 10% 50Hz
Programmer Rating	2 (1) A 230V a.c. each switch
Timeswitch Rating	2 (1) A 230V a.c.
Ambient temp	Operating: 0° to 45°C Storage: -20°C to 50°C
Without mains power	Display: blank Time: always kept Program times: always preserved
Programming resolution	1 minute
Wiring	Fixed wiring only, to comply with current IEE regulations
Pollution degree	Must be maintained by a qualified electrician or heating engineer
Maintenance	2
Software class	2
Ball pressure test temperature	75°C
Rated impulse voltage	2.5kV

The Lifestyle Programmer conforms to the essential requirements of these Directives:

2014/30/EU- Electromagnetic Compatibility Directive

2014/35/EU- Low Voltage Directive

2012/19/EU WEE Directive

2003/66/EC Battery Directive
Technical Helpline Tel: 0333 6000 622
customer.care@draytoncontrols.co.uk
Website: www.draytoncontrols.co.uk
Quick Commissioning Guide
06490197001 IssD
Schneider Electric
401 Southway Drive



Plymouth
PL6 6QT
United Kingdom
Schneider Electric



35 Rue Joseph Monier
France- 92500 Rueil Malmaison
se.com/contact

BEFORE INSTALLATION

First, make sure the mains supply is switched off!

USING AN EXISTING WALL-PLATE

Loosen the securing screws on the old timeswitch and unplug it.

Check that there's 70mm clearance to the right of the wall-plate, and 25mm above it. Now plug the Lifestyle unit into the wallplate and tighten the securing screws. Check the 3A fuse, and switch on the mains.

FITTING A NEW WALL-PLATE

The ideal location is 1.4m above floor level, with reasonable lighting, good access, no condensation, no extremes of temperature, and a supporting surface that fully covers the back of the unit.

Position with 70mm clearance to the right, 25mm above, and sufficient room to access the securing screws underneath.

Fix, with terminals at the top, either direct to a flat wall using wall plugs and no. 6 x 1" woodscrews, or on a flush mounting single conduit box type UA1 (BS4662) using M3.5 x 14 bolts. DO NOT USE A SURFACE MOUNTING BOX.

WIRING THE TIMESWITCH WALL PLATE

For surface wiring, snap out the cable entry strip on the bottom edge of the wall-plate. Lifestyle units are double-insulated and need no earth connection, but an earthing continuity (loop) terminal is provided for convenience.

Internal wiring

After wiring, plug in the unit and tighten the securing screws. Check the mains input has a 3A fuse, and switch on the mains.

If the engineer has set your program and timings – you won't need to do anything else. Just keep this guide in a safe place for future reference.

The Lifestyle Timeswitch will automatically control your system by switching it on and off at times that suit you. The light on the front of the Timeswitch shows when it's on.

Models	Your timeswitch is set as"	Instructions for the model are on page
24-hour		7
5/2-day		8
7-day		10

(1) Model to be ticked by the installer

PREPARING TO PROGRAMME YOUR SYSTEM

As your Timeswitch has a built-in, factory set, clock, there is no need to set the time. However, should you need to, go to section "Setting the Clock" Page 12.


If the timings haven't been set for you, then this is how your timeswitch has been set at the factory. It's easy to make changes. Just go to the section on the program that's already been selected – 24-hour, 5/2 day or 7-day – and follow the simple instructions.

Your timeswitch has been set with these standard times.

They're based on the 5/2-day program, with different settings for the weekend.

SWITCHING	WEEKDAYS	WEEKENDS
ON 1 – start of first timed period	6.30am	7.00am
OFF 1 – end of first timed period	8.30am	9.00am
ON 2 – start of second timed period*	12.00pm	12.00pm
OFF 2 – end of second timed period*	12.00pm	12.00pm
ON 3 – start of third timed period	4.30pm	4.00pm
OFF 3 – final switch-off of the day	10.30pm	11.00pm

* Notice that the second period has the same ON and OFF times, which means neither your central heating nor hot water will respond. If you want to activate this middle period, simply set different ON and OFF times.

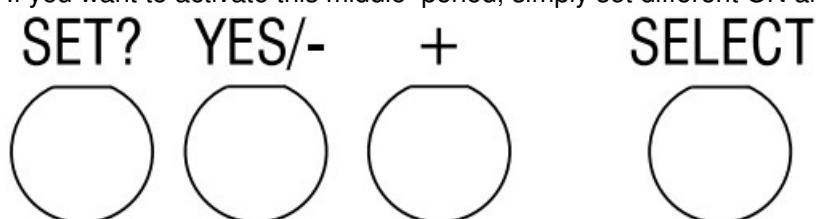

Remember:

- Make your changes using the SET?, YES/-, and + buttons found under the bottom flap.
- You can't set ON1 as the last timing before midnight, but you can set OFF3 after midnight – providing it's not

more than 23 hours and 59 minutes after ON1.

- You need to set the timings in sequence – i.e. ON1, OFF1, ON2, OFF2, ON3, OFF3. If you get out of sequence, the display will flash a warning.

DAY-TO-DAY VARIATIONS

Sometimes you might need to change the way you use your system temporarily – perhaps due to an exceptionally cold day.

Here's how to do it – without affecting your program.

Switching on and off

On the front of the timeswitch there is an Advance/Boost button.

It allows you to switch your system either on or off, irrespective of the program. So if the heating is off, and you want warmth now, you can either –

1. Press Advance to switch it on (ADV will be displayed), and it will stay on until the end of the next period. Or if the heating is on and you don't need it, press Advance and it will go off until the beginning of the next ON period.

Advance will only operate in TIMED or ONCE modes.

2. Press & Hold Boost to switch on for an extra hour (& BST will be displayed), then Press again for two () or three () hours.

To cancel Boost, Press Boost again (). Or if the heating is already on, using Boost will extend the ON time by one, two or three hours.

Over-riding the program



At the side of the display there are four operating modes:

OFF	continuously off.
TIMED	on for up to 3 periods a day.
ONCE	on for 1 period a day, from the start of ON1 to the end of OFF3.
ON	continuously on.

Use the SELECT button under the flap to change the mode.

This won't alter the timings in your program, which you can return to by selecting TIMED.

THE 24-HOUR PROGRAM

This is the simplest program – every day's the same. Just follow the sequence.

Want to leave a timing as it is? Just press SET? and move on to the next one.

Need to delete your timings and start again? Press 'SET' and '+' together to go back to the pre-set program.

If you don't press anything for two minutes, the timeswitch automatically goes back to normal operation.

These instructions are for setting a 24-hour cycle that will be the same for every day of the week – so you'll only need to go through the procedure once.

- Press the SET? button and you'll see 'SET PROG?'.



- Press the YES button, and you'll see ON1, the start of your first heating period. Adjust it in 1-minute steps using the – and + buttons. If the – and + buttons are held down, the time changes in 10-minute steps.



- Press SET?, and you'll see OFF1, the end of your first heating period. Adjust this in the same way, press SET?, then repeat the procedure for ON2, OFF2, ON3 and OFF3.



- When you press SET? after setting OFF3, the timeswitch will return to normal operation.

THE 5/2 DAY PROGRAM

Here you've got the option of changing times for the weekends to cope with different demands. Just follow the sequence, setting weekdays first.

Want to leave a timing as it is? Just press SET? and move on to the next one.

Need to delete your timings and start again? Press 'SET' and '+' together to go back to the pre-set program.

If you don't press anything for two minutes, the timeswitch automatically goes back to normal operation.

These instructions are for setting the same timings for weekdays, and different ones for the weekend.

Set weekday times

- Press the SET? button and you'll see 'SET PROG?'.



- Press the YES button, and the display will ask 'SET MON to FRI PROG?'



- Press YES to confirm and you'll see ON1, the start of your first heating period. Adjust it in 1-minute steps using the – and + buttons. If the – and + buttons are held down, the time changes in 10-minute steps.



- Press SET?, and you'll see OFF1, the end of your first heating period. Adjust this in the same way, press SET?, then repeat the procedure for ON2, OFF2, ON3 and OFF3.



Set weekend times

- When you press SET? after OFF3 for weekdays, the display will ask 'SET SAT SUN PROG?'. Press YES, and alter the times in the same way.



- When you press SET? after OFF3 for SAT SUN, the timeswitch will return to normal operation.

THE 7-DAY PROGRAM

This is where you can have different timings for every day of the week, if necessary. Just follow the sequence, setting weekdays first.

Want to leave a timing as it is? Just press SET? and move on to the next one.

Need to delete your timings and start again? Press 'SET' and '+' together to go back to the pre-set program.

If you don't press anything for two minutes, the timeswitch automatically goes back to normal operation.

These instructions are for setting your system with the possibility of having different timings for each day of the week.

Set all weekdays

- Press the SET? button and you'll see 'SET PROG?'.



- Press the YES button, and the display will ask 'SET MON to FRI PROG?'



- When you press SET? after OFF3 for SAT SUN, the timeswitch will return to normal operation.

THE 7-DAY PROGRAM

This is where you can have different timings for every day of the week, if necessary. Just follow the sequence, setting weekdays first.

Want to leave a timing as it is? Just press SET? and move on to the next one.

Need to delete your timings and start again? Press 'SET' and '+' together to go back to the pre-set program.

If you don't press anything for two minutes, the timeswitch automatically goes back to normal operation.

These instructions are for setting your system with the possibility of having different timings for each day of the week.

Set all weekdays

- Press the SET? button and you'll see 'SET PROG?'



- Press the YES button, and the display will ask 'SET MON to FRI PROG?'



- Press YES, and you'll see ON1, the start of your first heating period. Adjust it in 1-minute steps using the – and + buttons. If the – and + buttons are held down, the time changes in 10minute steps.



- Press SET?, and you'll see OFF1, the end of your first heating period. Adjust this in the same way, press SET?, then repeat the procedure for ON2, OFF2, ON3 and OFF3.



Set each day

If, after you've set OFF3 for the weekdays, you want to fine-tune one or more days, press SET? until you find the first day you want to adjust – then go through the procedure, altering any time you wish. Press SET? to move on to the next day. When you've finished, press SET? until you see 'SET SAT SUN PROG?'



If you don't want to alter any individual days, keep pressing SET? until you see 'SET SAT SUN PROG?'

Set weekends



- Press YES, and alter the weekend ON and OFF times in the same way.

Set each weekday

If, after you've set OFF3 for the weekend, you want to fine-tune Saturdays or Sundays, press SET? until you find the first day you want to adjust – then go through the procedure, altering any time you wish. Press SET? to move on to the next day. When you press SET? after setting Sunday's OFF3, the timeswitch will go back to normal operation.



If you don't want to alter either day, keep pressing SET? until the timeswitch goes back to normal operation.

SETTING THE CLOCK AND DATE

Applicable to all models

Setting the Clock

The clock in your timeswitch has been set at the factory, and automatically keeps time and date, even during power loss, and accounts for British Summer Time. However, should you wish to set the clock or date proceed as follows:

- Press the SET? button twice and you'll see SET CLOCK?.



Set the hour

Press YES once, and then the hour will start to flash. Use the – and + buttons to set the hour, checking for AM and PM.



Set the minute

Press SET?, and the minutes will start to flash. Use the – and + buttons to set the exact time.



Press SET?, and 'SET DATE?' appears in the display.

If you want to change the date, then carry on to the next section.

If not, press SET? to go back to normal operation.

SETTING THE DATE

The weekday is automatically calculated from the date, so if the weekday is incorrect you'll need to reset the date.

- Press the SET? button three times and you'll see SET DATE?.



Set the year

Press YES and the year will start to flash. Use the – and + buttons to adjust.



Set the month

Press SET? and the month will start to flash. Use the – and + buttons to adjust.




Set the day

Press SET? and the day will start to flash. Use the – and + buttons to adjust.



Set the Day Light Saving

Press SET? and the current DLS status will start to flash for day light saving (British Summer Time). Use the – and + buttons to turn on or off.

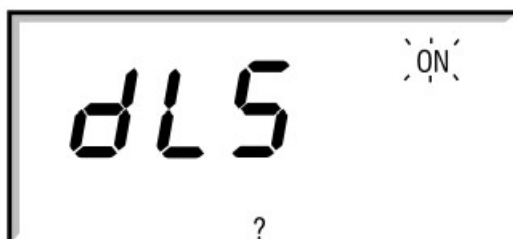

Press SET? to go back to normal operation.

Recycling



Batteries, rechargeable or not, should not be disposed of into ordinary household waste. Instead, they must be recycled properly to protect the environment and cut down the waste of precious resources.

— Your local waste management authority can supply details concerning the proper disposal of batteries.

This product should not be disposed of with household waste. Please recycle the products where facilities for electronic waste exist. Check with your local authorities for recycling advice.

Schneider Electric

401 Southway Drive
Plymouth
PL6 6QT

United Kingdom

Technical: +44(0)333 6000 622

customer.care@draytoncontrols.co.uk

www.draytoncontrols.co.uk

Lifestyle
Dual Channel Programmer
for heating AND hot water
Installation and User Instructions
DUAL CHANNEL 06490197001 ISSD

INSTALLATION INSTRUCTIONS

PLEASE NOTE: INSTALLATION MUST ONLY BE

CARRIED OUT BY A QUALIFIED ELECTRICIAN OR HEATING ENGINEER.

MAKE SURE MAINS INPUT HAS A 3 AMP FUSE. TECHNICAL DATA

LP241Si, LP522Si & LP722Si PROGRAMMERS

LP111Si & LP711Si TIMESWITCHES

Voltage

230V a.c. +10% – 10% 50Hz

Programmer Rating

2 (1) A 230V a.c. each switch

Timeswitch Rating Ambient temp

2 (1) A 230V a.c. Operating: 0° to 45°C Storage: -20°C to 50°C

Without mains power Programming resolution

Display: blank Time: always kept Program times: always preserved 1 minute

Wiring

Fixed wiring only, to comply with current IEE regulations

Maintenance

Must be maintained by a qualified electrician or heating engineer

Pollution degree

2

Software class

2

Ball pressure test temperature

75°C

Rated impulse voltage 2.5kV

The Lifestyle Programmer conforms to the essential Schneider Electric

requirements of these Directives:

401 Southway Drive

2014/30/EU 2014/35/EU

Electromagnetic Compatibility Low Voltage Directive

Directive

Plymouth PL6 6QT United Kingdom

2012/19/EU WEEE Directive

2006/66/EC Battery Directive

Technical Helpline Tel: 0333 6000 622 customer.care@draytoncontrols.co.uk Website: www.draytoncontrols.co.uk

Schneider Electric 35 Rue Joseph Monier France- 92500 Rueil Malmaison

Quick Commissioning Guide 06490197001 IssD

se.com/contact 2

BEFORE INSTALLATION First, make sure the mains supply is switched off! **USING AN EXISTING WALL-PLATE** Loosen the securing screws on the old programmer and unplug it. Check that there's 70mm clearance to the right of the wall-plate, and 25mm above it. Now plug the Lifestyle unit into the wall-plate and tighten the securing screws. Check the 3A fuse, and switch on the mains.

FITTING A NEW WALL-PLATE The ideal location is 1.4m above floor level, with reasonable lighting, good access, no condensation, no extremes of temperature, and a supporting surface that fully covers the back of the unit. Position with 70mm clearance to the right, 25mm above, and sufficient room to access the securing screws underneath. Fix, with terminals at the top, either direct to a flat wall using wall plugs and no. 6 x 1" woodscrews, or on a flush mounting single conduit box type UA1 (BS4662) using M3.5 x 14 bolts. **DO NOT USE A SURFACE MOUNTING BOX.** **WIRING THE WALLPLATE** For surface wiring, snap out the cable entry strip on the bottom edge of the wall-plate. Lifestyle units are double-insulated and need no earth connection, but an earthing

continuity (loop) terminal is provided for convenience. Internal wiring

3

PRIOR TO MOUNTING THE PROGRAMMER SELECT THE PROGRAM SETTING

The Universal Programmer is selectable, which means it must be set to the customer's requirements as part of the installation procedure. There are 3 options:

24-hour Program same times, 7 days a week.

5/2-day Program weekends different to weekday times.

7-day Program every day of the week can be different

Linked operation central heating and hot water switch on and off at the same time.

Independent operation- central heating and hot water switch on and off at different times

The factory setting is a 24-hour program with independent operation and a fully-pumped system. Any changes are made with the 3 plastic headers on the back of the unit – simply pull off the header and replace it in the new position.

L = Linked times. I = Independent times

1 = 24-hour program. 7 = 7-day program No header = 5/2-day program.

P = Pumped G = Gravity

Plug in the unit and tighten the securing screws. Check the mains input has a 3A fuse, and switch on the mains.

ALWAYS SWITCH OFF THE MAINS BEFORE REMOVING THE UNIVERSAL PROGRAMMER AND NEVER FIT IT TO A LIVE WALL-PLATE!

4

USER'S INSTRUCTIONS

If the engineer has set your program and timings you won't need to do anything else. Just keep this guide in a safe place for future reference.

INTRODUCTION

The Lifestyle Programmer will automatically control your central heating and hot water by switching them on and off at times that suit you. The two lights on the front of the Programmer show when they're on.

Models

Your programmer is set as(1)

24-hour

5/2-day

7-day

(1) Model to be ticked by the installer

Instructions for the model are on page

8 9 12

PREPARING TO PROGRAM YOUR SYSTEM

As your programmer has a built-in, factory set, clock, there is no need to set the time. However, should you need to, go to section "Setting the Clock" page 14.

If the timings haven't been set for you, then this is how your programmer has been set at the factory. It's easy to make changes. Just go to the section on the program that's already been selected 24-hour, 5/2 day or 7-day and follow the simple instructions.

. Your programmer has been set with these standard times. They're based on the 5/2-day program, with different settings for the weekend, and central heating and hot water linked.

5

SWITCHING

WEEKDAYS

ON 1 start of first timed period

6.30am

OFF 1 end of first timed period

8.30am

ON 2 start of second timed period* 12.00pm

OFF 2 end of second timed period* 12.00pm

ON 3 start of third timed period

4.30pm

OFF 3 final switch-off of the day

10.30pm

WEEKENDS 7.00am 9.00am 12.00pm 12.00pm 4.00pm 11.00pm

* Notice that the second period has the same ON and OFF times, which means neither your central heating nor hot water will respond. If you want to activate this middle period, simply set different ON and OFF times.

Remember: Make your changes using the SET?, YES/-, and + buttons on the programmer, found under the bottom flap.

You can't set ON1 as the last timing before midnight, but you can set OFF3 after midnight providing it's not more than 23 hours and 59 minutes after ON1.

You need to set the timings in sequence i.e. ON1, OFF1, ON2, OFF2, ON3, OFF3. If you get out of sequence, the display will flash a warning.

6

DAY-TO-DAY VARIATIONS

Sometimes you might need to change the way you use your central heating or hot water temporarily perhaps due to an unusually cold day, or exceptional demand for hot water.

Here's how to do it without affecting your program.

Switching on and off

On the front of the programmer there are two Advance/Boost buttons one for central heating and one for hot water. They allow you to switch your system either on or off, irrespective of the program. So if the heating or hot water is off, and you want warmth or hot water now, you can either

1. Press Advance to switch it on (ADV will be displayed), and it will stay on until the end of the next period. Or if the heating/hot water is on and you don't need it, press Advance and it will go off until the beginning of the next ON period.

Advance will only operate in TIMED or ONCE modes.

2. Press & Hold Boost to switch on for an extra hour (& BST will be displayed), then Press again for two () or three () hours. To cancel Boost, Press Boost again (). Or if the heating/hot water is already on, using Boost will extend the ON time by one, two or three hours.

Over-riding the program

On each side of the display there are four operating modes one group for central heating, the other for hot water. You can change modes with immediate effect by using the appropriate SELECT button. This won't alter the timings in your program,

which you can return to by selecting TIMED.

OFF TIMED ONCE
ON

= continuously off.
= on for up to 3 periods a day.
= on for 1 period a day, from the start of ON1 to the end of OFF3.
= continuously on.

7

THE 24-HOUR PROGRAM

This is the simplest program every day's the same. Just follow the sequence, setting the central heating times first then the hot water.

Want to leave a timing as it is? Just press SET? and move on to the next one.

Need to delete your timings and start again? Press `SET' and `+' together to go back to the pre-set program. If you don't press anything for two minutes, the programmer automatically goes back to normal operation.

These instructions are for setting the central heating and hot water independently on a 24-hour cycle that will be the same for every day of the week. If your settings are linked, then CH and HW won't appear in the display and you'll only need to go through the procedure once.

Set the central heating

Press the SET? button and you'll see `SET PROG?`.

SET
PROG?

Press the YES button, and the display will ask `SET CH PROG?`

SET CH
PROG?

Press YES and you'll see ON1, the start of your first central heating period. Adjust it in 1-minute steps using the - and + buttons. If the - and + buttons are held down, the time changes in 10-minute steps.

8

Press SET?, and you'll see OFF1, the end of your first central heating period. Adjust this in the same way, press SET?, then repeat the procedure for ON2, OFF2, ON3 and OFF3.

Set the hot water When you press SET? after setting OFF3 for the central heating, the display will ask `SET HW PROG?`

Press YES, then set your times in the same way. Remember, in this mode you can have different times to your central heating if you wish. When you press SET? after setting OFF3 for the hot water, the programmer will return to normal operation.

THE 5/2 DAY PROGRAM Here you've got the option of changing times for the weekends to cope with different demands. Just follow the sequence, setting weekdays first. Want to leave a timing as it is? Just press SET? and move on to the next one. Need to delete your timings and start again? Press `SET` and `+` together to go back to the pre-set program. If you don't press anything for two minutes, the programmer automatically goes back to normal operation.

9

These instructions are for setting your central heating and hot water independently, with the same timings for weekdays and different ones for the weekend. If your settings are linked, then CH and HW won't appear in the display and you'll only need to go through the weekday and weekend phases once. Set weekday central heating Press the SET? button and you'll see `SET PROG?`.

SET
PROG?

Press the YES button, and the display will ask `SET CH MON to FRI PROG?`

CH MON TUE WED THU FRI
PROG?

Press YES and you'll see ON1, the start of your first central heating period. Adjust it in 1-minute steps using the - and + buttons. If the - and + buttons are held down, the time changes in 10-minute steps.

Press SET?, and you'll see OFF1, the end of your first central heating period. Adjust this in the same way, press SET?, then repeat the procedure for ON2, OFF2, ON3 and OFF3.

10

Set weekday hot water When you press SET? after setting OFF3 for the central heating, the display will ask `SET HW MON to FRI PROG?`.

Press YES, then set your times in the same way. Remember, in this mode you can have different times to your central heating if you wish. Set weekend central heating When you press SET? after OFF3 for the weekday hot water, the display will ask `SET CH SAT SUN PROG?`.

CH SAT SUN

Press YES to confirm, and alter the times in the same way. Set weekend hot water

When you press SET? after OFF3 for the weekend central heating, the display will ask `SET HW SAT SUN PROG?`. Press YES, and follow the procedure. When you press SET? after OFF3 for HW SAT SUN, the programmer will return to normal operation.

11

THE 7-DAY PROGRAM

This is where you can have different timings for every day of the week, if necessary. Just follow the sequence, setting weekdays first.

Want to leave a timing as it is? Just press SET? and move on to the next one.

Need to delete your timings and start again? Press `SET' and `+' together to go back to the pre-set program.

If you don't press anything for two minutes, the programmer automatically goes back to normal operation.

These instructions are for setting your central heating and hot water independently, with the possibility of having different timings for each day of the week. If your settings are linked, then CH and HW won't appear in the display and you'll only need to go through process once.

Set all weekdays

First you set the times that are going to be the same for each weekday, then you can select each day individually and make any further adjustments. If you want each day to be quite different, go straight to `Set each day.'

Press the SET? button and you'll see `SET PROG?'

SET

PROG?

Press the YES button, and the display will ask `SET MON to FRI PROG?'

MON TUE WED THU FRI PROG?

Press YES, and the display will ask `SET CH MON to FRI PROG?'

CH

MON TUE WED THU FRI PROG?

12

Press YES, and you'll see ON1, the start of your first central heating period. Adjust it in 1-minute steps using the - and + buttons. If the - and + buttons are held down, the time changes in 10-minute steps.

Press SET?, and you'll see OFF1, the end of your first central heating period. Adjust this in the same way, press SET?, then repeat the procedure for ON2, OFF2, ON3 and OFF3.

When you press SET? after setting OFF3 for the weekday central heating, the display will ask `SET HW MON to FRI PROG?'

Press YES, then set your hot water times in the same way. Remember, in this mode you can have different times to your central heating if you wish. Set each day If, after you've set OFF3 for your hot water, you want to fine-tune one or more weekdays, press SET? until you find the first day you want to adjust then go through the procedure, altering any time you wish. Press SET? to move on to the next day. When you've finished, press SET? until you see `SET SAT SUN PROG?'

MON PROG?

If you don't want to alter any individual days, keep pressing SET? until you see `SET SAT SUN PROG?'

13

Set weekend

SAT SUN

Press YES, and alter the central heating and hot water times in the same way. Set each day If, after you've set OFF3 for your weekend hot water, you want to fine-tune Saturdays or Sundays, press SET? until you find the first day you want to adjust then go through the procedure, altering any time you wish. Press SET? to move on to the next day. When you press SET? after setting your hot water for Sundays, the programmer will go back to normal operation.

SAT

If you don't want to alter either day, keep pressing SET? until the programmer goes back to normal operation.

SETTING THE CLOCK AND DATE

Applicable to all models

Setting the Clock The clock in your programmer has been set at the factory, and automatically keeps time and date, even during power loss, and accounts for British Summer Time. However, should you wish to set the clock or date proceed as follows:

14

Press the SET? button twice and you'll see SET CLOCK?.

SET

CLOCK?

Set the hour Press YES once, and then the hour will start to flash. Use the and + buttons to set the hour, checking for AM and PM.

Set the minute Press SET?, and the minutes will start to flash. Use the and + buttons to set the exact time.

Press SET?, and 'SET DATE?' appears in the display. If you want to change the date, then carry on to the next section. If not, press SET? to go back to normal operation. SETTING THE DATE The weekday is automatically calculated from the date, so if the weekday is incorrect you'll need to reset the date. Press the SET? button three times and you'll see SET DATE?.

SET

DATE?

15

Set the year Press YES and the year will start to flash. Use the and + buttons to adjust.

Set the month Press SET? and the month will start to flash. Use the and + buttons to adjust.


Set the day Press SET? and the day will start to flash. Use the and + buttons to adjust.

Set the Day Light Saving Press SET? and the current DLS status will start to flash for day light saving (British Summer Time). Use the and + buttons to turn on or off.

Press SET? to go back to normal operation.

16

Documents / Resources

	<p>Drayton LP822 Universal Dual Channel Programmer [pdf] Instruction Manual LP822 Universal Dual Channel Programmer, LP822, Universal Dual Channel Programmer, Dual Channel Programmer, Channel Programmer, Programmer</p>
---	--

References

- [Our offices around the world](#)
- [Drayton Controls | Heating controls, TRVs and thermostats](#)