Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

YYJLX Y-1370

YYJLX Y-1370 3-Light Flush Mount Crystal Ceiling Light Fixture User Manual

Model: Y-1370 | Brand: YYJLX

Important Safety Information

WARNING: To avoid the risk of electric shock, always disconnect power at the circuit breaker or fuse box before installation, servicing, or cleaning. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved. Use only UL/ETL listed wire connectors. Ensure all electrical connections are secure and correct.
CAUTION: Wear gloves during installation to prevent cuts from sharp edges. Handle crystal components with care to avoid breakage.

Package Contents

Verify that all components are present before beginning installation. If any part is missing or damaged, do not attempt to assemble or install the fixture.

- 1 x YYJLX Y-1370 Ceiling Light Fixture
- 1 x Mounting Hardware Kit (includes screws, wire nuts, etc.)
- 1 x Detailed Mounting Instructional Manual
- *Note: E26 bulbs are NOT included and must be purchased separately.*

Specifications

Brand:	YYJLX
Model Name:	Y-1370
Color:	Silver (Chrome)
Material:	Crystal, Iron
Style:	Modern
Light Fixture Form:	Close to Ceiling
Product Dimensions:	14.96"L x 14.96"W x 5.9"H
Power Source:	Hardwired

Installation Type:	Flush Mount
Light Source Type:	LED (Bulbs not included)
Number of Light Sources:	3
Voltage:	110 Volts
Wattage:	Max 60 watts per bulb
Bulb Base:	E26
Brightness:	Up to 2400 Lumens (depending on bulbs)

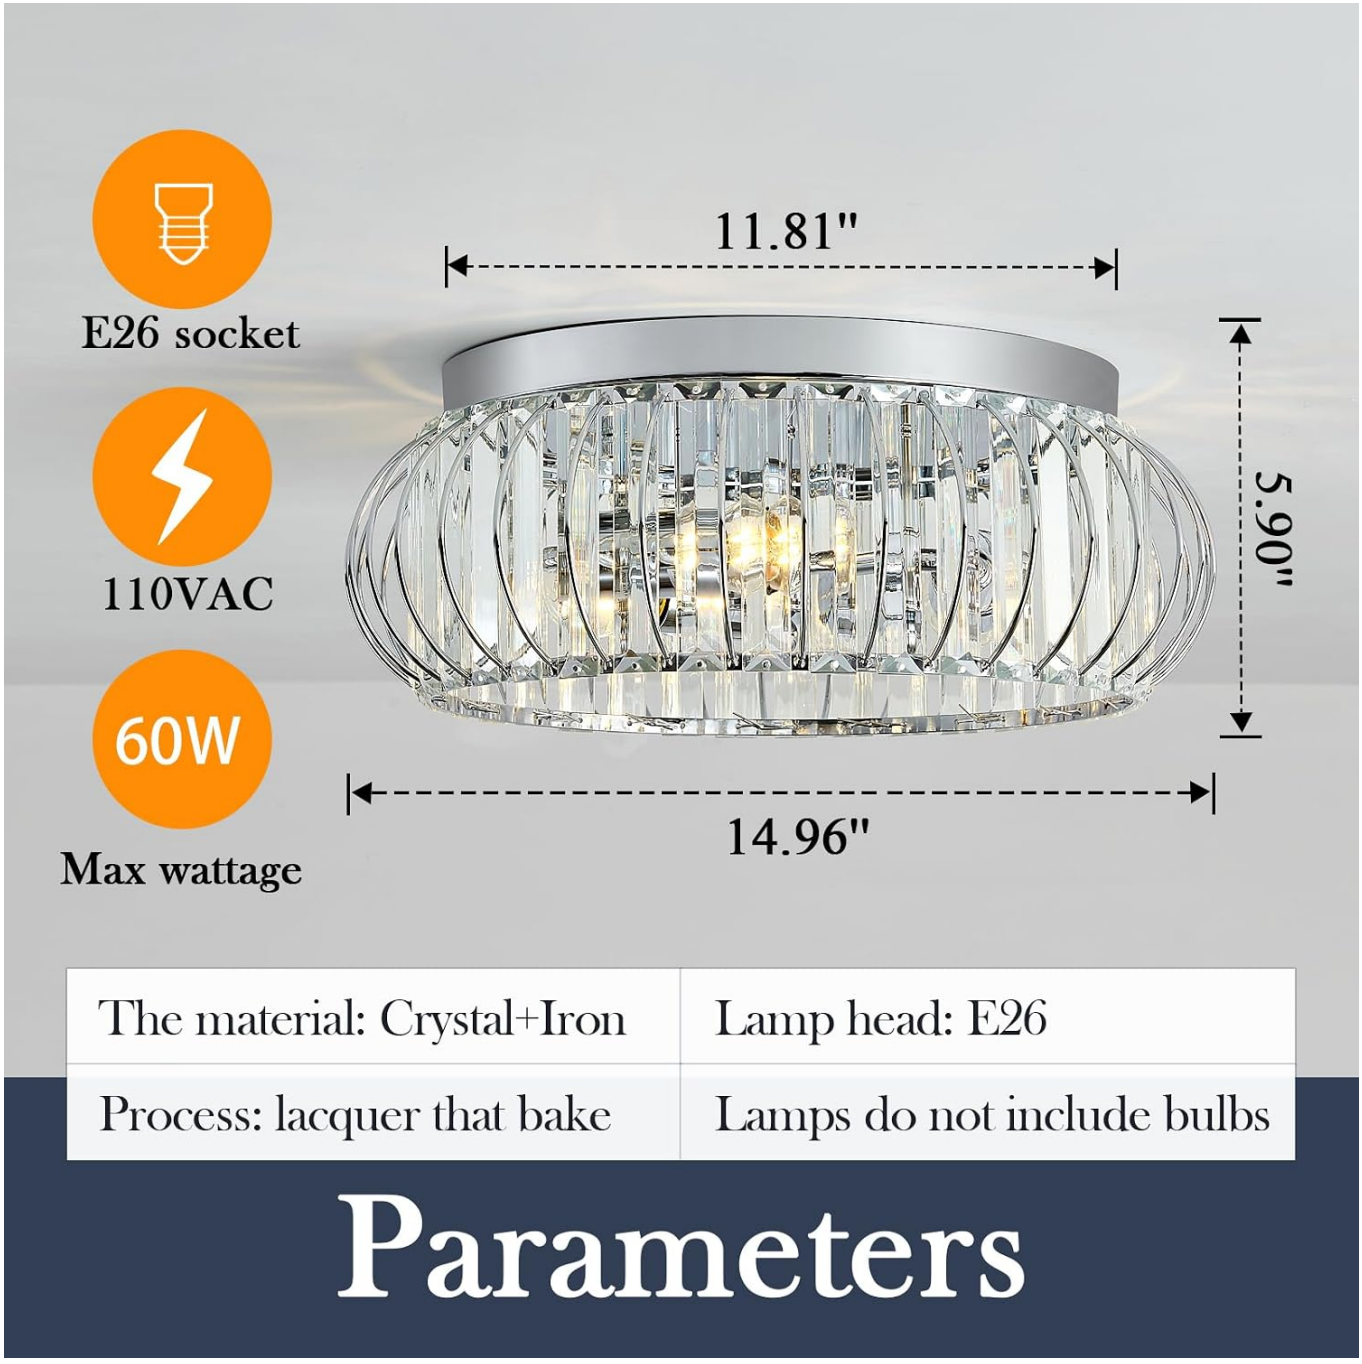


Figure 1: Product dimensions and electrical parameters. The fixture is 14.96 inches wide and 5.90 inches high, with an E26 socket for up to 60W bulbs at 110VAC.

Setup and Installation

Pre-Installation

1. **Turn off Power:** Locate the circuit breaker or fuse box and turn off the power to the junction box where you will be installing the light fixture.
2. **Prepare Mounting Surface:** Ensure the ceiling junction box is securely mounted and capable of supporting the fixture's weight.
3. **Unpack Contents:** Carefully remove all components from the packaging and inspect for any damage.

Wiring Instructions

4. **Connect Wires:**
    - Connect the **black** wire from the fixture to the **black** (Live) wire from the junction box using a wire nut.
    - Connect the white wire from the fixture to the white (Neutral) wire from the junction box using a wire nut.
    - Connect the **green** or bare copper (Ground) wire from the fixture to the **green** or bare copper (Ground) wire from the junction box using a wire nut.
5. **Secure Connections:** Ensure all wire connections are tight and secure. Carefully tuck the wires into the junction box.



Figure 2: Key components of the light fixture, including the crystal elements, iron top plate, and E26 bulb sockets.



Figure 3: Detail of the ceiling plate, which secures the fixture to the electrical box.

Mounting the Fixture

6. **Attach Mounting Bracket:** Secure the mounting bracket (if separate) to the junction box using the provided screws.
7. **Mount Fixture:** Align the fixture's base with the mounting bracket and secure it with the provided screws or nuts.
8. **Install Bulbs:** Screw three E26 base bulbs (not included) into the sockets. Do not exceed 60 watts per bulb.
9. **Attach Crystal Shade:** Carefully attach the crystal lampshade to the fixture body according to the detailed instructions in the included manual.



Figure 4: E26 socket detail for bulb installation.

Operating Instructions

Once the fixture is securely installed and bulbs are in place, restore power at the circuit breaker. Operate the light fixture using your wall switch. This fixture is compatible with dimmer bulbs, allowing you to adjust the light intensity if desired. Ensure you use E26 LED bulbs for optimal performance and energy efficiency.



Figure 5: Examples of warm light, white light, and the fixture in on/off states.



Figure 6: Compatible E26 bulb types.



Video 1: Official product video demonstrating the Chrome Flush Mount Ceiling Light by YYJLX. This video showcases the installed fixture and its lighting effects.

Maintenance

Cleaning

- Always turn off the power before cleaning.
- Wipe the fixture with a soft, dry cloth.
- For crystal components, a slightly damp cloth can be used, followed by a dry cloth to prevent water spots. Avoid harsh chemicals or abrasive cleaners.

Bulb Replacement

- Ensure power is off at the circuit breaker.
- Allow bulbs to cool completely before touching.
- Unscrew the old bulb and replace it with a new E26 base bulb (max 60 watts).

Troubleshooting

Problem	Possible Cause	Solution
Light does not turn on.	◦ Power is off. ◦ Loose wiring connection. ◦ Bulb is faulty or not installed correctly. ◦ Faulty wall switch.	◦ Check circuit breaker and wall switch. ◦ Verify all wire connections are secure (ensure power is off first). ◦ Replace bulb or ensure it is screwed in tightly. ◦ Consult a qualified electrician.
Light flickers.	◦ Loose bulb. ◦ Incompatible dimmer switch/bulb. ◦ Loose wiring.	◦ Tighten bulb. ◦ Ensure dimmer switch and bulbs are compatible. ◦ Check wiring connections (ensure power is off first).
Crystal elements are dull.	Dust or smudges.	Clean crystals with a soft, damp cloth and dry thoroughly.

Warranty and Support

YYJLX provides a worry-free guarantee for this product. If you encounter any quality issues or are not satisfied with your purchase, please do not hesitate to contact us. Our customer support team is available to assist you with any questions or concerns regarding installation, operation, or product defects.
For support, please refer to the contact information provided in your purchase documentation or visit the official YYJLX store on Amazon: YYJLX Store.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0DFLZRHKJ

More documents and user manuals: **https://manuals.plus/**