

# **DS18 GEN-X210LD Ported Enclosure with Dual Subwoofer Included Owner's Manual**

Home » DS18 » DS18 GEN-X210LD Ported Enclosure with Dual Subwoofer Included Owner's Manual



PORTED ENCLOSURE WITH DUAL GEN-X104D SUBWOOFER INCLUDED





### **Contents**

- 1 INSTALLATION INSTRUCTIONS
- **2 SPECIFICATION**
- **3 MEASUREMENT**
- 4 Documents / Resources
  - 4.1 References
- **5 Related Posts**

### INSTALLATION INSTRUCTIONS

Professional installation by an authorized DS18 dealer is highly recommended!

Otherwise, the performance of your new gear may not be satisfactory. In the event that you decide to do your own installation, please read, and follow this manual carefully.

Failure to do so may compromise the integrity of this product, your automobile, and possibly void the product warranty.


Use this Subwoofer Box with an external Monoblock subwoofer amplifier that can handle 1 Ohm load impedance and a maximum of 800W RMS continuous power, otherwise the amplifier or the Subwoofer can be damaged. In case that you need to install an amplifier please refer to the amplifier's instruction manual to perform the installation of the amplifier before the use this Subwoofer Box.

Do Not Connect this directly to the factory radio or aftermarket radio speaker output. This will not be enough power for the subwoofers and could be bad for the radio's amplifier if is not 1 ohm stable.

Secure the subwoofer box with a strap or bracket to screw it down in case this box is loose on your trunk or a SUV cargo area to avoid this moving around which will damage the Subwoofer or box itself. In case of accelerating or hard braking this will reduce the possibility of movement! Major injuries may occur in case of an accident if this is not secured properly.

If you already have installed the amplifier then follow these simple steps:


- 1. Connect the subwoofer box to the amplifier using a minimum 12Ga speaker wire and make sure the polarity (+) and (-) is correct, otherwise the sound will be affected.
- 2. Now you are ready to play it for the first time. It is best to leave the gain all the way down at the start. Now, start with the head until volume low and work your way up.
- 3. Now you can tune the amp. We recommend using the Low Pass Filter at 120Hz or lower depending on your system. Take your time and make only one adjustment at a time. It may take some time to get the system fully adjusted. During this time the amp is drawing current from the battery. You should check the battery voltage from time to time and re-charge it if it gets low. That's it! You are done Now have fun!!

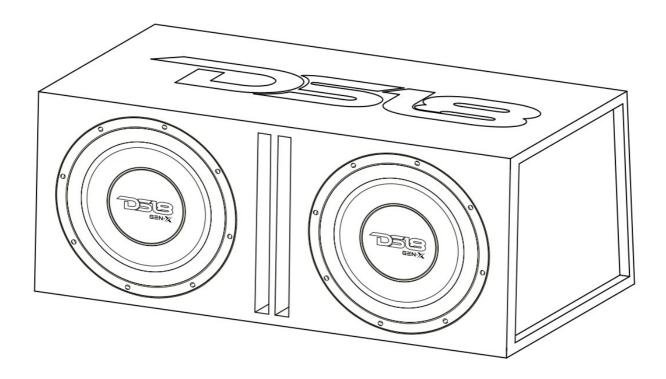


# **SPECIFICATION**

# **GENERAL**

Total RMS Power Handling Total MAX Power Handling Sensitivity (1w/1m) Frequency Response Recommended Lo Pass Cross SPEAKER SPECIFICATIONS Voice Coil Diameter Voice Coil Former Material	
Cone Material	Paper & Fiber Glass
	PPI
•	Foam / Espuma
	Steel / Acero
	Ferrite / Ferrita
_	
BOX SPECIFICATIONS	
	72.6L / 2.6ft3
	Parallel / Paralelo
	Front Ported / Puerto Frontal
• •	1/2" / 15mm MDF
	Black Carpet / Tapete Negro
	. F3 29 Hz
MEASUREMENT	. 1 0 20 112
Height	13 78" / 350 mm
· ·	30.71" / 780 mm
Depth 1	
· · · · · · · · · · · · · · · · · · ·	h) /
, ,	11) / 2 x 1.90 x 13 x 23.2 / 50 x 330 x 590
mm	

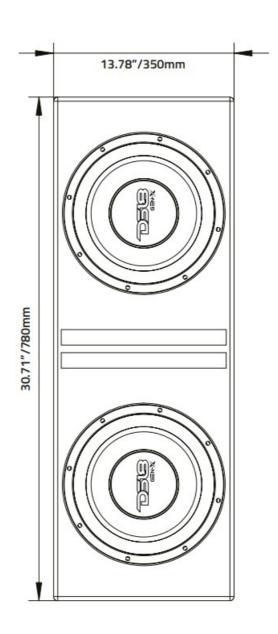

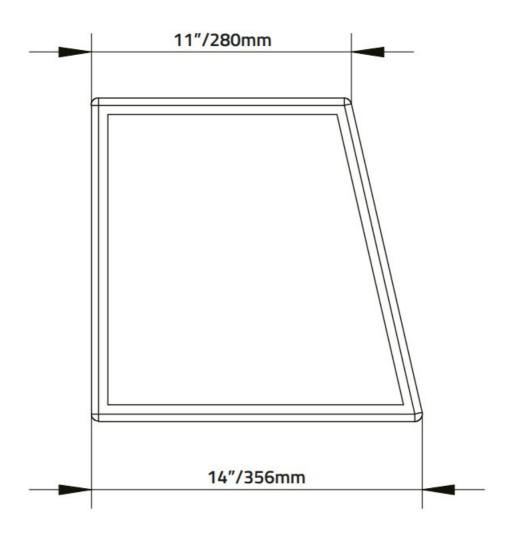

## **WARRANTY**

Please visit our website DS18.com for more information on our warranty policy. We reserve the right to change products and specifications at any time without notice. Images may or may not include optional equipment.



WARNING: Cancer and Reproductive Harm. www.P65Warning.ca.gov



**Documents / Resources** 



<u>DS18 GEN-X210LD Ported Enclosure with Dual Subwoofer Included</u> [pdf] Owner's Manual GEN-X210LD Ported Enclosure with Dual Subwoofer Included, GEN-X210LD, Ported Enclosur e with Dual Subwoofer Included, Subwoofer Included

## References

• Official DS18 Pro Audio Store - Speakers, Subwoofers, Amps & More!

Manuals+,