

- Manuals.plus /
- › PRUNUS /
- › PRUNUS A18 Wired Voice Amplifier User Manual

PRUNUS A18 Wired Mic-Black

PRUNUS A18 Wired Voice Amplifier User Manual

Model: A18 Wired Mic-Black

Introduction	What's in the Box	Product Overview	Setup	Operation	Charging
Wearing Options	Maintenance	Troubleshooting	Specifications	Warranty & Support	

1. INTRODUCTION

The PRUNUS A18 Wired Voice Amplifier is a portable audio device designed to amplify your voice, making it ideal for teachers, tour guides, presenters, and anyone needing to project their voice clearly to a group. This compact and lightweight amplifier features a wired microphone headset, long-lasting battery, and multiple connectivity options for versatile use.



Image: The PRUNUS A18 Wired Voice Amplifier, showing the main unit, wired microphone headset, and the included pearl chain for wearing.

2. WHAT'S IN THE BOX

Verify that all items are present in the package:

- Voice Amplifier Unit (A18)
- Wired Microphone Headset
- Pearl Chain
- Shoulder Strap
- USB Charging Cable
- User Manual



Image: A visual representation of the items included in the product packaging, such as the amplifier, microphone, cables, and straps.

3. PRODUCT OVERVIEW

3.1 Key Features

- **10W Powerful Output:** Covers up to 10,000 sq-ft, suitable for classrooms up to 180 people.
- **Smart LED Battery Monitoring:** LCD screen displays battery status.
- **Multiple Connectivity:** Supports Bluetooth 5.0, TF card, and wired microphone input.
- **Recording Function:** Ability to record lectures or speeches.
- **Long Battery Life:** 1800mAh battery provides 8-10 hours of amplification.
- **Lightweight & Portable:** Compact design for comfortable all-day wear.
- **Unique Pearl Chain Design:** Offers various wearing options.

3.2 Component Identification

Familiarize yourself with the amplifier's components:

1. **Power Button/Volume Knob:** Turn on/off and adjust volume.
2. **Microphone Input Port:** Connect the wired microphone headset.
3. **USB Charging Port:** For charging the device.
4. **TF Card Slot:** Insert a TF (MicroSD) card for audio playback.
5. **Mode Button:** Switch between amplification, Bluetooth, and TF card modes.
6. **Play/Pause Button:** Control audio playback.
7. **Next/Previous Track Buttons:** Navigate audio tracks.
8. **LED Display:** Shows battery level and mode.
9. **Speaker Grille:** Audio output.
10. **Belt Clip:** For attaching to clothing.



**Smart LED
Battery Display**



**Detachable
Belt Clip**



**Detachable
Microphones**

Image: Close-up views highlighting the Smart LED Battery Display, Detachable Belt Clip, and the Detachable Microphone of the PRUNUS A18 Voice Amplifier.

4. SETUP

4.1 Initial Charge

Before first use, fully charge the amplifier. Connect the provided USB charging cable to the amplifier's charging port and the other end to a USB power adapter (not included) or a computer's USB port. The LED display will indicate charging status.

4.2 Connecting the Microphone

Insert the plug of the wired microphone headset firmly into the microphone input port on the amplifier. Ensure the connection is secure for optimal sound quality.



Image: The amplifier demonstrating its easy connectivity options, including Bluetooth, TF card, and recording mode, with a smartphone showing a Bluetooth connection.

5. OPERATING INSTRUCTIONS

5.1 Power On/Off and Volume Control

- To power on, rotate the volume knob clockwise until the LED display lights up.
- To power off, rotate the volume knob counter-clockwise until the LED display turns off.
- Adjust the volume by rotating the same knob clockwise to increase and counter-clockwise to decrease.

5.2 Amplification Mode

Once powered on and the microphone is connected, the amplifier will automatically enter amplification mode. Speak into the microphone, keeping it close to your mouth for best results. Adjust the volume as needed.

10W Powerful Amplifier

Mini yet Mighty Sound



Image: The PRUNUS A18 amplifier with visual effects illustrating its powerful 10W sound output, capable of covering a large area.

5.3 Bluetooth Mode

1. Turn on the amplifier.
2. Press the **Mode** button until the LED display shows "BLUE" or a Bluetooth icon.
3. On your device (smartphone, tablet), enable Bluetooth and search for "PRUNUS A18" (or similar).
4. Select the amplifier to pair. A confirmation sound will indicate successful pairing.
5. You can now play audio from your device through the amplifier.

5.4 TF Card Playback

1. Insert a TF (MicroSD) card with audio files (MP3, WAV, etc.) into the TF card slot.
2. The amplifier will automatically switch to TF card mode, or you can press the **Mode** button to select it.
3. Use the **Play/Pause** and **Next/Previous Track** buttons to control playback.

5.5 Recording Function

To use the recording function, ensure a TF card is inserted. In amplification mode, press and hold the **Mode** button (or a dedicated recording button if present, refer to specific button labels on your device) to start recording. Press again to stop. Recordings are saved to the TF card.

6. CHARGING THE AMPLIFIER

The PRUNUS A18 amplifier is equipped with an 1800mAh rechargeable Lithium Polymer battery. When the battery is low, the LED display will indicate a low battery warning.

- Connect the USB charging cable to the amplifier's charging port.
- Connect the other end of the cable to a standard USB power source (e.g., wall adapter, computer USB port, power bank).
- Charging time is approximately 2.5-3 hours for a full charge.
- A full charge provides 8-10 hours of amplification time.



The advertisement features a black PRUNUS A18 amplifier as the central focus. The device has a digital display showing '100', a speaker grille with 'MEGAPHONE' and 'PROFESSIONAL' text, and the 'PRUNUS' brand name. The background is a vibrant pink with abstract geometric shapes. Large text on the left reads '1800mAh Exceptional Battery Life'. On the right, two circular icons with a lightning bolt and a clock respectively, are accompanied by the text '2.5-3h Rapid Charging' and '8-10h Amplification Time'.

1800mAh Exceptional Battery Life

1800
mAh

2.5-3h
Rapid Charging

8-10h
Amplification Time

Image: The amplifier highlighting its 1800mAh battery capacity, indicating 2.5-3 hours for rapid charging and 8-10 hours of amplification time.

7. WEARING OPTIONS

The PRUNUS A18 offers several versatile wearing options to suit different situations:

- **Shoulder Hanging:** Use the provided pearl chain or shoulder strap to wear the amplifier over your shoulder.
- **Waist Hanging:** Attach the amplifier to your waist using the belt clip or a waist strap.
- **Neck Hanging:** Wear the amplifier around your neck using the pearl chain or shoulder strap.
- **Back Buckle/Clip Stand:** Utilize the integrated belt clip to attach it to your belt or clothing, or use it as a stand on a flat surface.

Multiple Wearing Ways

Meet Your Different Needs



Image: Demonstrations of multiple ways to wear the PRUNUS A18 voice amplifier, including shoulder hanging, waist hanging, neck hanging, and using the clip stand.

Over the Head



Around the Neck

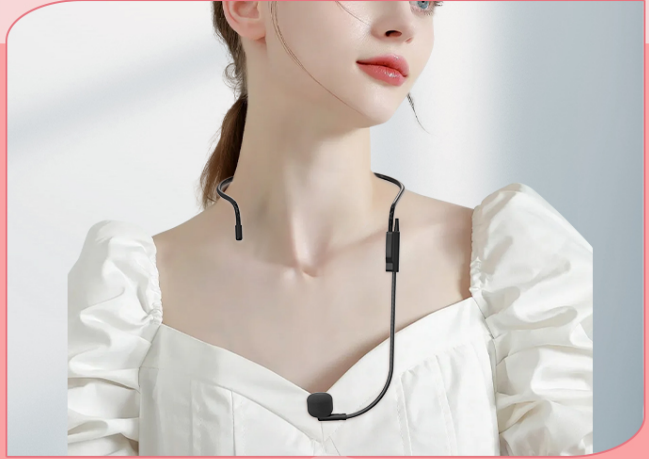


Image: Illustrations showing two ways to wear the microphone headset: over the head and around the neck for comfort and stability.

8. MAINTENANCE

- **Cleaning:** Wipe the amplifier and microphone with a soft, dry cloth. Do not use abrasive cleaners or solvents.
- **Storage:** Store the device in a cool, dry place away from direct sunlight and extreme temperatures.
- **Battery Care:** To prolong battery life, avoid fully discharging the battery frequently. Charge the device regularly, even if not in use for extended periods.
- **Microphone Care:** Keep the microphone away from moisture and dust. Handle the microphone headset gently to prevent damage.

9. TROUBLESHOOTING

Problem	Possible Cause	Solution
No sound from amplifier.	Device is off. Volume is too low. Microphone not connected or faulty. Battery is dead.	Turn on the device. Increase volume. Ensure microphone is securely plugged in. Try another microphone if available. Charge the amplifier.
Sound is distorted or has feedback.	Microphone too close to speaker. Volume too high. Interference.	Increase distance between microphone and amplifier. Lower the volume. Keep microphone away from other electronic devices.
Bluetooth not connecting.	Amplifier not in Bluetooth mode. Device Bluetooth is off. Already paired with another device.	Press Mode button to enter Bluetooth mode. Enable Bluetooth on your device. Disconnect from other devices or restart amplifier and try pairing again.

Problem	Possible Cause	Solution
TF card not playing.	TF card not inserted correctly. Unsupported file format. TF card is empty or corrupted.	Reinsert TF card firmly. Ensure files are in MP3 or WAV format. Check TF card on a computer; reformat if necessary.

10. SPECIFICATIONS

Feature	Detail
Model Number	A18 Wired Mic-Black
Output Wattage	10 Watts
Battery Capacity	1800mAh Lithium Polymer
Charging Time	Approx. 2.5-3 hours
Amplification Time	Approx. 8-10 hours
Connectivity Technology	Bluetooth 5.0, Wired (3.5mm), TF Card
Product Dimensions	4.25 x 1.27 x 1.25 inches
Item Weight	10.8 ounces
Audio Input	Bluetooth, TF card, Wired microphone
Mounting Type	Wearable with Clip Stand

11. WARRANTY & SUPPORT

11.1 Warranty Information

PRUNUS products typically come with a standard manufacturer's warranty. Please refer to the warranty card included in your package or visit the official PRUNUS website for detailed warranty terms and conditions. Keep your purchase receipt as proof of purchase for warranty claims.

11.2 Customer Support

For technical assistance, troubleshooting, or any inquiries regarding your PRUNUS A18 Voice Amplifier, please contact PRUNUS customer support through their official channels. You can often find contact information on the product packaging, the official PRUNUS website, or the retailer's support page.

Note: For the most up-to-date support information, please visit the [PRUNUS Store on Amazon](#).

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B0DFQ233D7>

More documents and user manuals: <https://manuals.plus/>