



DS18 PRO-GM6B MID Range Loudspeaker With Bullet Owner's Manual

[Home](#) » [DS18](#) » DS18 PRO-GM6B MID Range Loudspeaker With Bullet Owner's Manual 


DS18 PRO-GM6B MID Range Loudspeaker With Bullet Owner's Manual



Contents


- 1 DIMENSION
- 2 SPECIFICATIONS
- 3 MOTOR
- 4 THIELE & SMALL
PARAMETERS
- 5 MEASUREMENTS
- 6 Documents / Resources
 - 6.1 References

DIMENSION

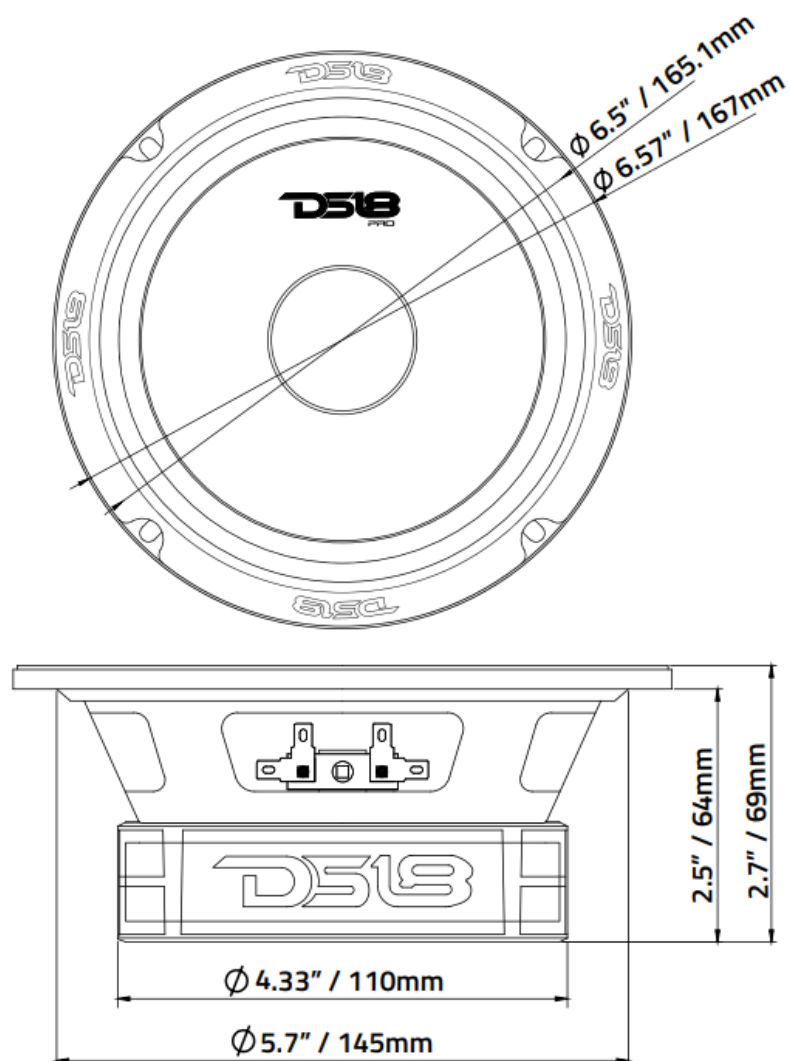

Graph

SPL vs. FREQ

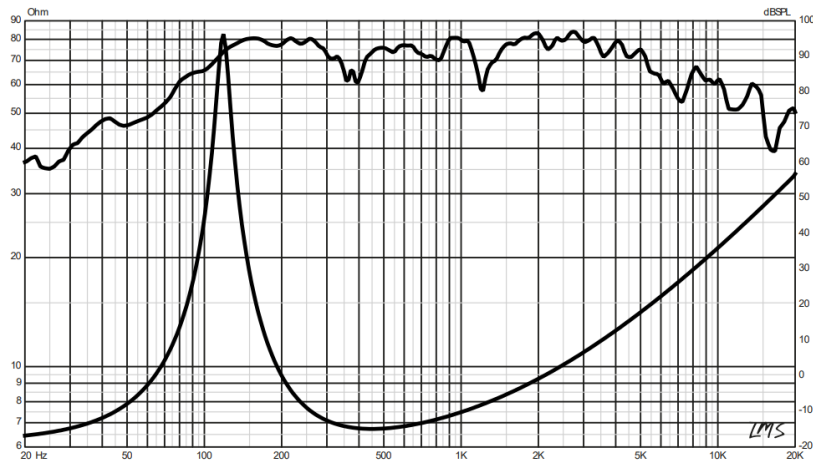

SPECIFICATIONS

Nominal Diameter: 6.5"

Nominal Impedance : 8 OHMS

RMS Power Handling: 140 Watts

MAX Power Handling: 480 Watts

Sensitivity: 93dB

Frequency Response : 100Hz-6.3KHz

Recommended Hi Pass Crossover: 120 Hz

Pair or single: Single

MOTOR

Voice Coil Diameter: 1.5"

Voice Coil Former Material: Kapton

Winding Material: CCAW

Cone Material: Paper

Bullet Material: Red Aluminum

Surround Material: Cloth

Basket Material: Steel

Basket Color: Matte Black

Magnet Material: Ferrite

Magnet Weight: 23 oz

THIELE & SMALL PARAMETERS

Equivalent Volume	Vas	6.92L / 2.44ft3
Free Air Resonance	Fs	105Hz
Mechanical Factor	Qms	10.092
Electrical Factor	Qes	0.78
Total Factor	Qts	0.724
Mechanical Mass	Mms	8.219g
Mechanical Complian	Cms	0.28mm/N
Voice Coil Inductance	BL	6.49
Cone Area	Le	0.761mH
DC Resistance	Sd	132.73cm2
DC Resistance	Re	6.4 ohm

MEASUREMENTS

Overall Diameter: 6.57"

Overall Depth: 2.7"

Front Mount Baffle Cutout: 5.7" /

Mounting Depth: 2.5"

Motor Diameter: 4.33"

FOR MORE INFORMATION
PLEASE VISIT
DS18.COM



Documents / Resources

	DS18 PRO-GM6B MID Range Loudspeaker With Bullet [pdf] Owner's Manual PRO-GM6B MID Range Loudspeaker With Bullet, PRO-GM6B, MID Range Loudspeaker With Bullet, Range Loudspeaker With Bullet, Loudspeaker With Bullet, Bullet
--	---

References

- [🔧 Official DS18 Pro Audio Store - Speakers, Subwoofers, Amps & More!](#)

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)