

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [AGSHOME](#) /

› [AGSHOME Wireless Home Alarm System with 1080P Camera \(Model A-9Pack\) - User Manual](#)

AGSHOME A-9Pack

AGSHOME Wireless Home Alarm System with 1080P Camera (Model A-9Pack) - User Manual

Model: A-9Pack
Brand: AGSHOME

1. INTRODUCTION

The AGSHOME Wireless Home Alarm System with 1080P Camera (Model A-9Pack) provides comprehensive security for your home. This system integrates a 1080P camera, a powerful 120dB alarm siren, and multiple sensors to create a smart security environment. It is designed for easy installation and offers smart features like instant video recording upon alarm activation, real-time notifications, and compatibility with voice assistants such as Amazon Alexa and Google Assistant.



Image 1.1: Overview of the AGSHOME Wireless Home Alarm System A-9Pack components.

2. WHAT'S INCLUDED

The AGSHOME A-9Pack includes the following components:

- 1 x 1080P Camera
- 1 x 120dB Wireless Alarm Siren (Base Station)
- 5 x Door/Window Sensors
- 2 x Remote Controls



Image 2.1: The AGSHOME Base Station (siren) and WiFi Camera.

3. SETUP GUIDE

Follow these steps to set up your AGSHOME Wireless Home Alarm System:

1. **Power On the Base Station and Camera:** Connect the alarm siren (base station) and the 1080P camera to a power source using the provided adapters.
2. **Download the App:** Download and install the "Smart Life" application on your smartphone from your device's app store.
3. **Register/Log In:** Open the Smart Life app and create a new account or log in with an existing one.
4. **Add Devices:** In the app, follow the on-screen instructions to add the alarm siren and camera. Ensure your Wi-Fi network is 2.4 GHz, as the system connects only via 2.4 GHz Wi-Fi.
5. **Install Sensors:** Attach the door/window sensors to your desired entry points using the included adhesive. Ensure the two parts of each sensor are aligned and close to each other when the door/window is closed.
6. **Test the System:** After all components are installed and paired, test the system by arming it and then opening a protected door or window to ensure the alarm triggers and you receive notifications.

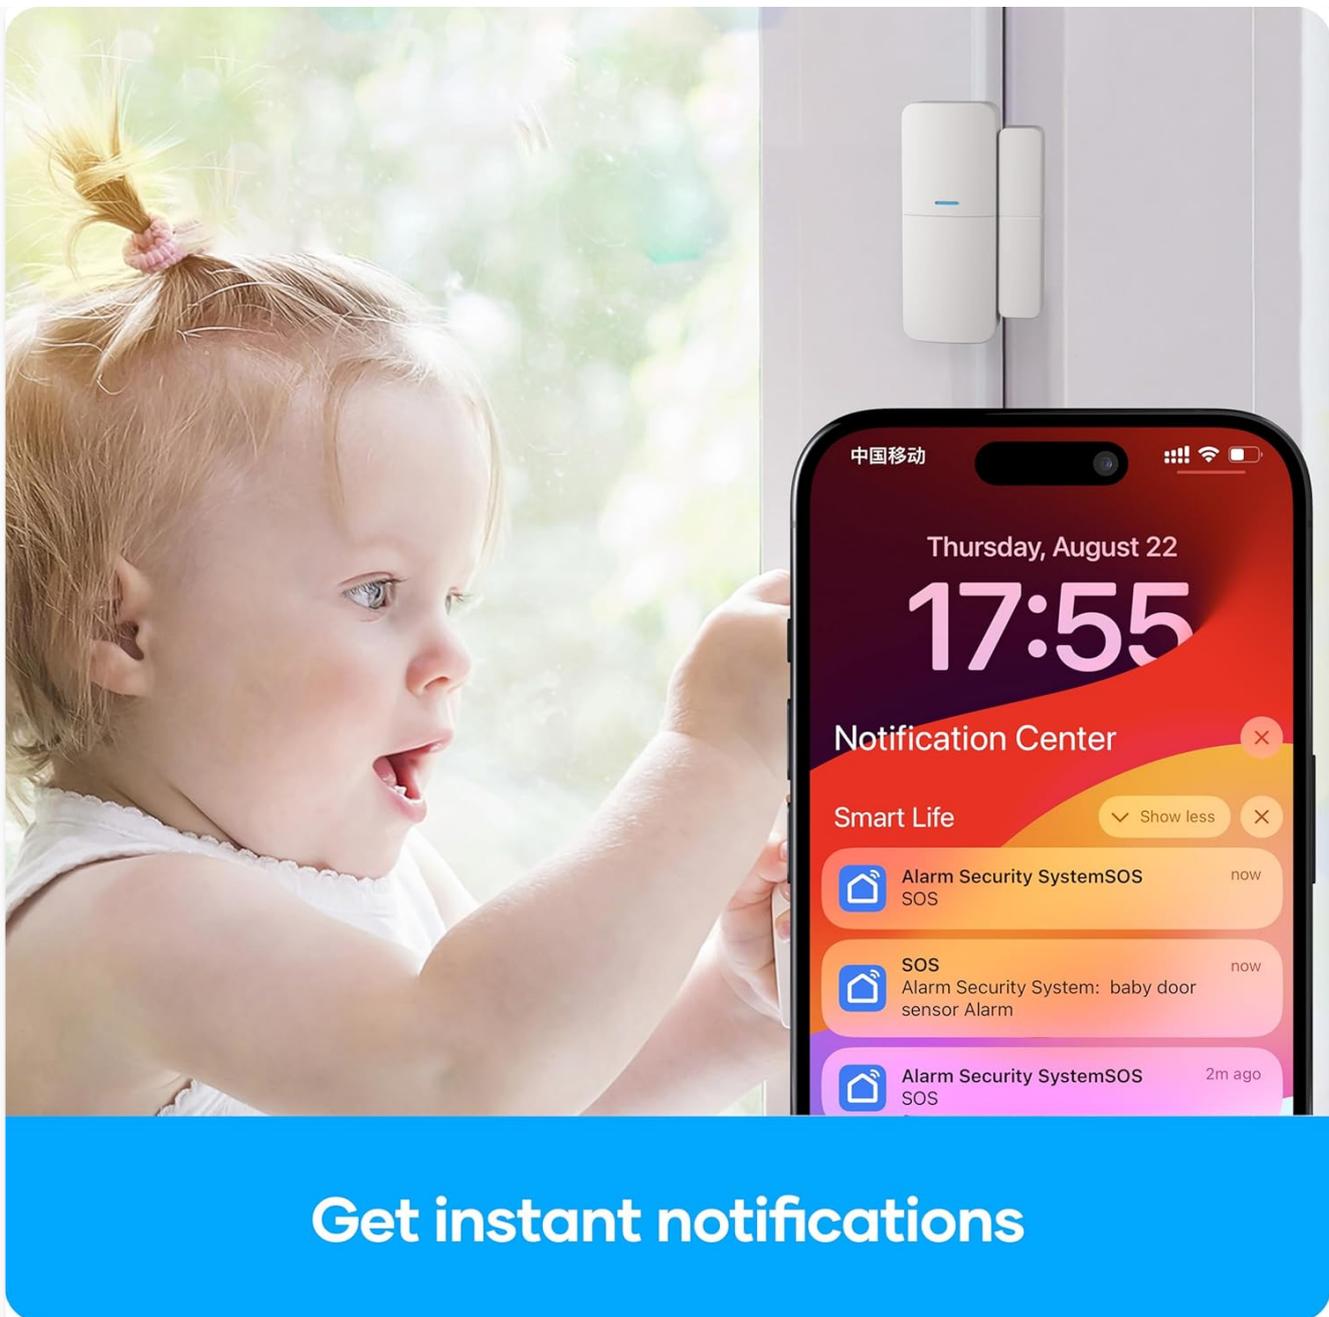


Image 3.1: The camera features easy installation, allowing for flexible placement.

4. OPERATING THE SYSTEM

4.1 Arming and Disarming

Use the provided remote controls to arm or disarm the system. The remote controls typically have buttons for arming (away mode), disarming (home mode), and an SOS function.

4.2 Smart Scene Integration

The system is designed for intelligent security scenarios. Upon alarm activation, the 1080P camera can instantly record video, providing visual evidence and allowing for a quick response. You will receive immediate notifications on your smartphone.



AGSHOME
Base Station



AGSHOME
WiFi Camera



Control at your fingertips

Image 4.1: Monitor your home security in real-time through the mobile application.

4.3 Mobile App Control

The "Smart Life" app provides comprehensive control and monitoring capabilities:

- **Real-time Viewing:** Access live video feeds from your 1080P camera.
- **Two-Way Audio:** Communicate with individuals near the camera using the built-in two-way audio feature.
- **Instant Notifications:** Receive alerts directly on your phone when an alarm is triggered.
- **Scheduling:** Set schedules for automatic arming and disarming of the system.
- **Alarm History:** Review a timeline of all alarm events.



Image 4.2: Key features of the mobile application for managing your alarm system.

4.4 Voice Control with Alexa and Google Assistant

The AGSHOME system is compatible with Amazon Alexa and Google Assistant, allowing you to control certain functions using voice commands. For example, you can arm or disarm the system by speaking to your smart assistant.

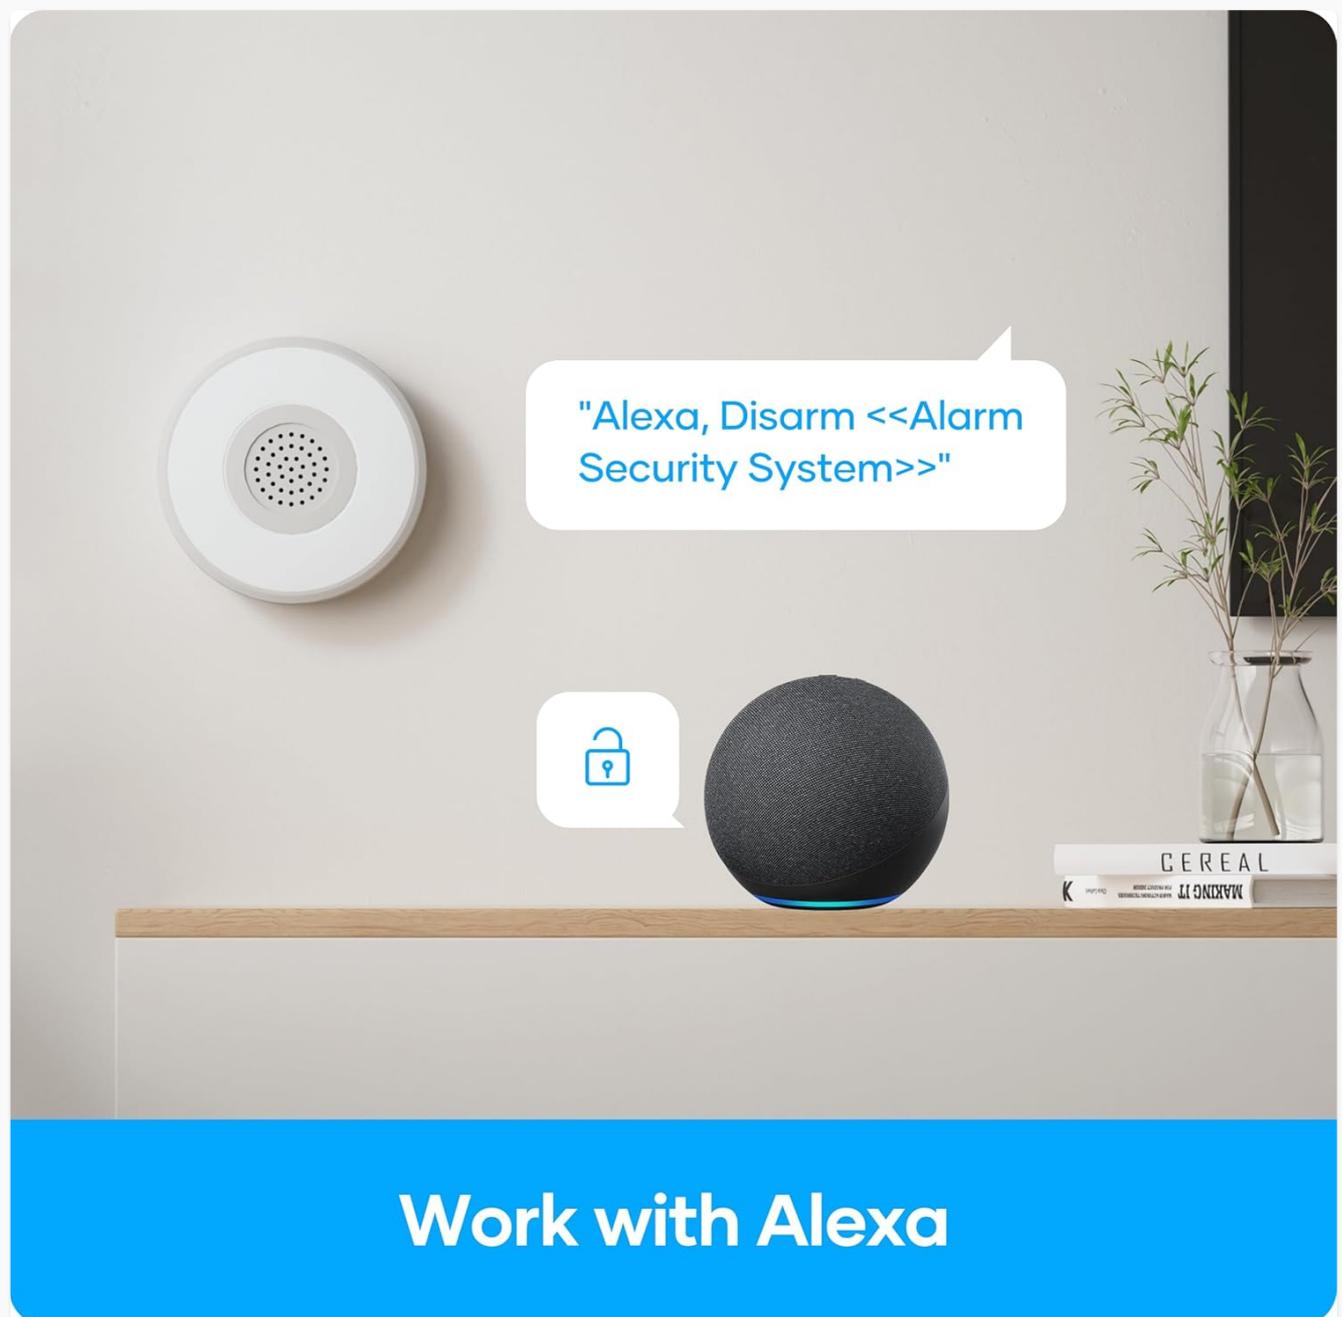


Image 4.3: Voice control integration with Amazon Alexa for convenient system management.

5. MAINTENANCE

5.1 Backup Battery

The alarm siren (base station) includes an 8-hour backup battery to ensure continuous protection during power outages. Ensure the base station is always connected to power to keep the backup battery charged.

5.2 Sensor Batteries

The door/window sensors are powered by lithium batteries (included). The average battery life is approximately 6 months. Replace batteries promptly when the app indicates a low battery status to ensure optimal performance.

5.3 Cleaning

Clean the camera lens and sensor surfaces periodically with a soft, dry cloth to maintain clear visibility and accurate detection. Avoid using harsh chemicals or abrasive materials.

6. TROUBLESHOOTING

- **Alarm Siren Volume:** If the 120dB siren does not seem loud enough, ensure it is placed in an open area and not obstructed. While rated at 120dB, perceived loudness can vary based on environment.
- **Camera Offline:** Verify that the camera is connected to a 2.4 GHz Wi-Fi network. Check your router settings and ensure the camera is within Wi-Fi range. Restarting the camera and router may resolve connectivity issues.
- **Sensors Not Triggering Alarm:** Ensure the door/window sensors are correctly installed with the two parts aligned and within the specified gap. Check the battery status of the sensors in the app. Re-pair the sensor if necessary.
- **Poor Sensor Adhesive:** If the included adhesive for the sensors does not hold securely, consider using a stronger, commercially available adhesive suitable for your surface type.
- **No Notifications:** Check your smartphone's notification settings for the "Smart Life" app to ensure notifications are enabled. Verify your phone has an active internet connection.

7. SPECIFICATIONS

Feature	Specification
Manufacturer	Shenzhen Daping Computer Co., Ltd.
Product Dimensions	43 x 23 x 23 cm
Item Weight	740 grams
Model Number	A-9Pack
Color	A-9pack
Power Source	Battery Powered
Voltage	5V
Installation Method	DIY Wireless

Sound Level	120 dB
Included Components	1 camera, 1 alarm siren, 5 door/window sensors, 2 remote controls
Batteries Required	Yes (1 Lithium Metal battery included for base station, others for sensors)
Average Battery Life	6 Months (for sensors)
Compatible Devices	Amazon Alexa, Google Assistant

8. WARRANTY AND SUPPORT

For warranty information or technical assistance, please contact AGSHOME customer support. Refer to the product packaging or the AGSHOME official website for specific contact details and warranty terms.

You can also visit the [AGSHOME Store on Amazon](#) for more information and support resources.