



DS18 V2HL.V2 HiLo Converter 2-Channel with Speaker Emulator User Manual

[Home](#) » [DS18](#) » DS18 V2HL.V2 HiLo Converter 2-Channel with Speaker Emulator User Manual 



V2HL.V2 HiLo Converter 2-Channel with Speaker Emulator User Manual

Contents

- [1 FEATURES:](#)
- [2 INSTALLATION](#)
- [3 SPECIFICATIONS:](#)
- [4 Documents / Resources](#)
- [5 Related Posts](#)


FEATURES:



- 2CH smart line-output converter

- 2CH high-level input 2CH RCA output
- Surface mount component technology
- Lowest impedance and best power filter
- FR4 double sides PC board
- Remote trigger output with signal sensing
- Power LED indicator to show working status
- Speaker emulator to enable signal output from some OEM amplifiers with speaker sensor

INSTALLATION

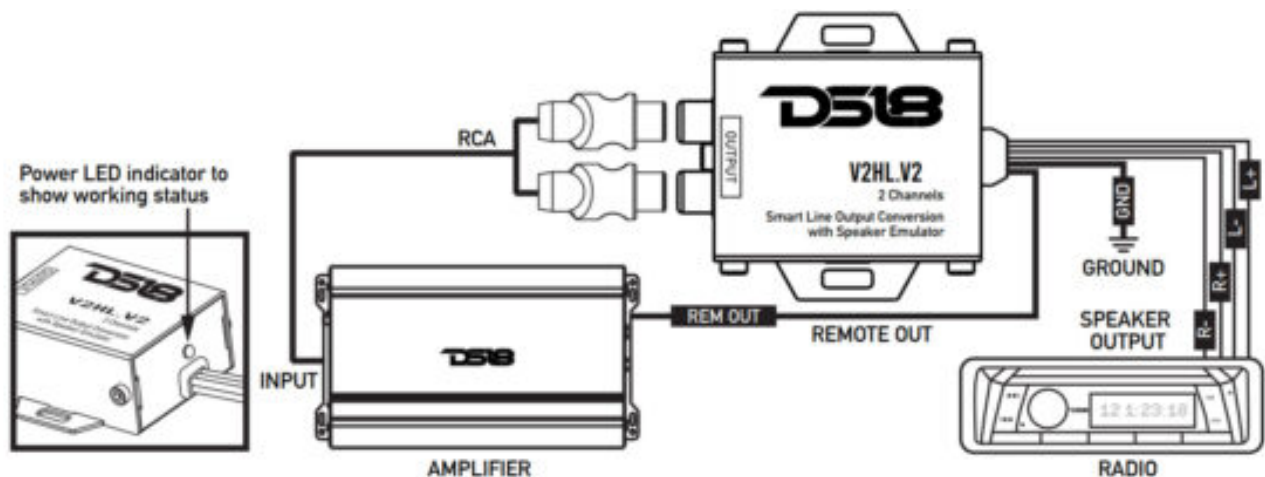

SPECIFICATIONS:

Input: Up to 55W

Output: Up to 8V

Remote Output Generate: 12 Volt

Frequency Response: 10Hz-30KHz

Input Impedance: 20K ohm

Standby Current: 200mA

Dimensions: 65.8mm L x 57mm W x 24.2mm H 2.58" x 2.24" x 0.95"

#WELIKEITLOUD @ f y t d



DS18.COM

Documents / Resources



[DS18 V2HL.V2 HiLo Converter 2-Channel with Speaker Emulator](#) [pdf] User Manual
V2HL.V2, HiLo Converter 2-Channel with Speaker Emulator

