

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [Solareye](#) /

› [Solareye Trail Camera WiFi User Manual](#)

## Solareye SV-TCKW

# Solareye Trail Camera WiFi User Manual

Model: SV-TCKW

## WELCOME

Thank you for choosing the Solareye Trail Camera WiFi. This manual provides detailed instructions for setting up, operating, and maintaining your camera to ensure optimal performance for wildlife monitoring and surveillance. Please read this manual thoroughly before using the product.

## PACKAGE CONTENTS

Before you begin, please verify that all items listed below are included in your package:

- WiFi Trail camera \*1
- Solar panel \*1
- 32GB SD card \*1
- Installation strap \*2
- USB cable \*1
- Screws \*8
- Rubber plug \*8
- Metal base \*2
- Metal bracket \*2
- User manual \*1

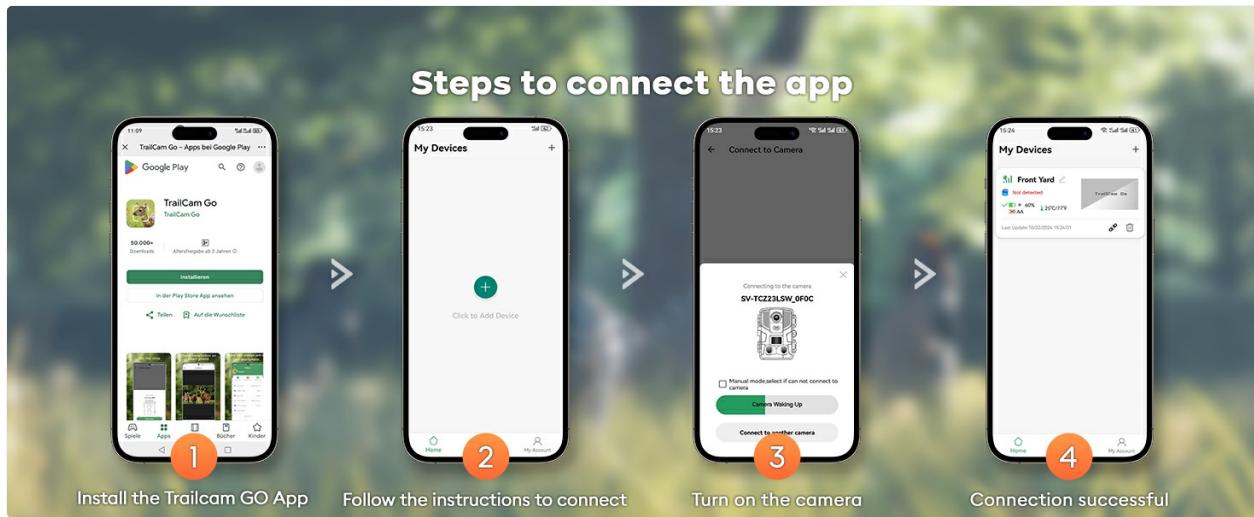


Image: All components included in the Solareye Trail Camera WiFi package.

## INITIAL SETUP

### Powering the Camera

The Solareye Trail Camera offers multiple power options for extended outdoor use:

- **Built-in 5000mAh Battery:** The camera features a rechargeable internal battery. Charge it directly using the included Type-C data cable.
- **Portable Solar Panel:** Connect the included solar panel for continuous power, significantly extending the camera's standby time in outdoor environments.
- **AA Battery Pack (Optional):** For additional backup and very long battery life, the camera supports an extra AA battery pack (AA batteries not included).

# Solar Powered Trail Camera

ECO-Friendly and Money-Saving



Image: Various power options for the Solareye Trail Camera, including solar, Type-C charging, and AA batteries.

## Quick installation



## Simple and convenient operation

<b>OFF</b>	Turn off camera
<b>Test</b>	The screen opens and you can set the working mode, parameters etc. and view videos / photos.
<b>ON</b>	Wait 10 seconds, the screen turns off and the camera switches to motion detection mode.
<b>Note</b>	When you use it for the first time, please switch to TEST and set camera parameters such as working time, operating mode, video/photo resolution etc. Then switch to ON, the camera switches to operating mode.

Image: Visual guide to the different power input methods for the camera.

## Inserting the SD Card

The camera supports micro memory cards up to 256GB. A 32GB Micro SD card is included in the package. Insert the SD card into the designated slot before operation.

## Quick Installation Steps

1. Install 4 AA batteries (if using as backup power).
2. Insert the included 32GB SD card into the card slot.
3. Set camera parameters using the built-in LCD screen or via the app.
4. Switch the camera to 'TEST' mode for initial setup, then to 'ON' for motion detection mode.

**Note:** For first-time use, switch to 'TEST' mode to set working mode, parameters, and view videos/photos. After 10 seconds, the screen turns off, and the camera switches to motion detection mode when set to 'ON'.

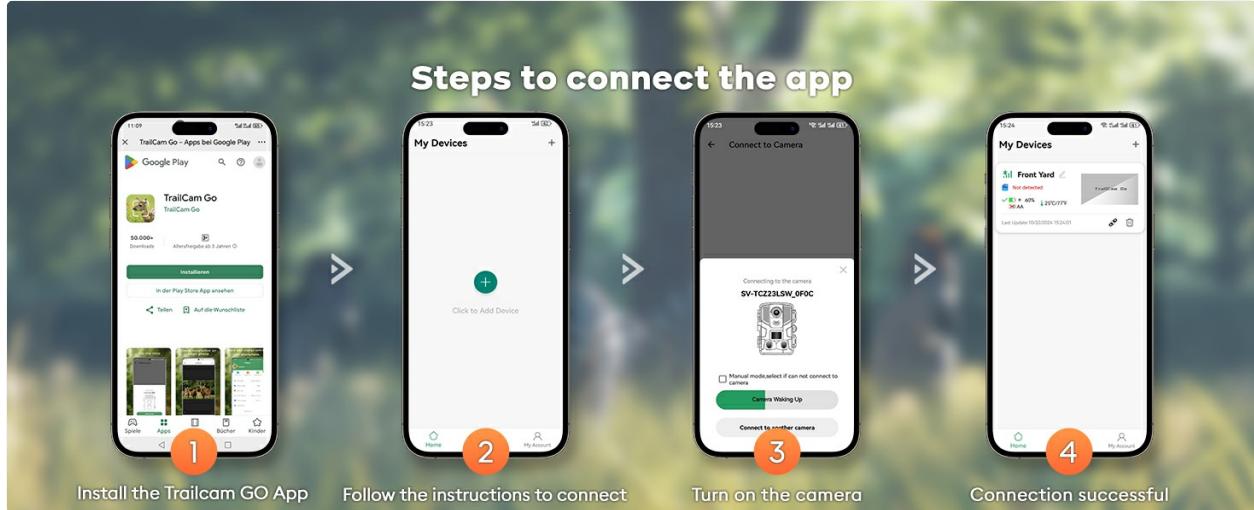


Image: Visual guide for quick installation, including battery and SD card insertion.

## APP CONNECTION AND CONTROL

The Solareye Trail Camera features built-in WiFi and Bluetooth for convenient control via the