

Dual XVM296BT Multimedia Receiver with Bluetooth Featuring a 6.2" Touch Screen Display Owner's Manual

<u>Home</u> » <u>Dual</u> » Dual XVM296BT Multimedia Receiver with Bluetooth Featuring a 6.2" Touch Screen Display Owner's Manual





XVM296BT INSTALLATION/OWNER'S MANUAL











Copyright Notes

The Bluetooth® word mark and logos are owned by the Bluetooth SIG, Inc. SD Logo is a trademark of SD-3C, LLC.

Other trademarks and trade names are those of their respective owners.

Contents [hide

- 1 Safety Information
- 2 FCC Compliance
- 3 Preparation
- 4 Wiring Diagram Inputs/Outputs
- **5 Control Locations**
- **6 General Operation**
- 7 AM/FM Tuner Operation
- 8 USB/SD Card Operation
- 9 Media Compatibility USB/SD Card
- 10 Media Compatibility
- 11 Bluetooth Operation
- 12 Front 3.5mm Aux Input
- 13 Rear Camera Operation –

(Optional)

- 14 Specifications
- 15 Limited One Year Warranty
- 16 Troubleshooting
- 17 Documents / Resources
 - 17.1 References
- **18 Related Posts**

Safety Information

Please read all instructions carefully before attempting to install or operate.

Due to its technical nature, it is highly recommended that your DUAL XVM296BT is installed by a professional installer or an authorized dealer. This product is only for use in vehicles with 12VDC negative ground only.

To prevent damage or injury:

- Make sure to ground the unit securely to the vehicle chassis ground.
- Do not remove the top or bottom covers of the unit.
- Do not install the unit in a spot exposed to direct sunlight or excessive heat or the possibility of water

splashing.

- Do not subject the unit to excessive shock.
- When replacing a fuse, only use a new one with the prescribed rating. Using a fuse with the wrong rating may cause the unit to malfunction.
- To prevent short circuits when replacing a fuse, disconnect the wiring harness first.
- Use only the provided hardware and wire harness.
- You cannot view video while the vehicle is moving. Find a safe place to park and engage the parking brake.
- If you experience problems during installation, consult your nearest DUAL dealer.
- If the unit malfunctions, reset the unit as described on page 10 first. If the problem still persists, consult your nearest DUAL dealer or call tech assistance @ 1-866-382-5476.
- To clean the monitor, wipe only with a dry silicone cloth or soft cloth. Do not use a stiff cloth, or volatile solvents such as paint thinner and alcohol. They can scratch the surface of the panel and/or remove the printing.
- When the temperature of the unit falls (as in winter), the liquid crystal inside the screen will become darker than usual. Normal brightness will return after using the monitor for a while.
- When extending the ignition, battery or ground cables, make sure to use automotive-grade cables or other cables with an area of 0.75mm (AWG 18) or more to prevent voltage drops.
- Do not touch the liquid crystal fluid if the LCD is damaged or broken. The liquid crystal fluid may be hazardous to your health or fatal. If the liquid crystal fluid from the LCD contacts your body or clothing, wash it off with soap immediately.

FCC Compliance

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Preparation


Before You Start

Disconnect negative battery terminal. Consult a qualified technician for instructions.

• Avoid installing the unit where it would be subject to high temperatures, such as from direct sunlight, or where it would be subject to dust, dirt or excessive vibration.


Getting Started

- Certain vehicles may require an installation kit and/or wiring harness adapter (sold separately).
- Snap trim ring into place (if required).

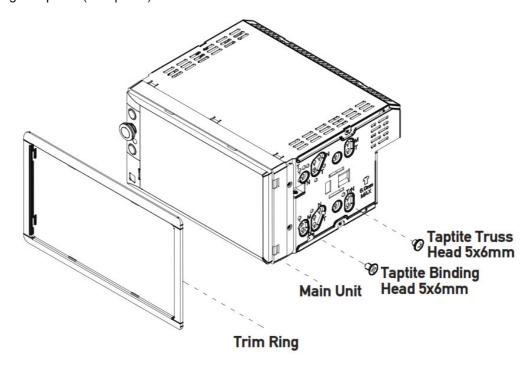

TYPICAL FRONT-LOAD DIN MOUNTING METHOD

Wiring Diagram - Inputs/Outputs

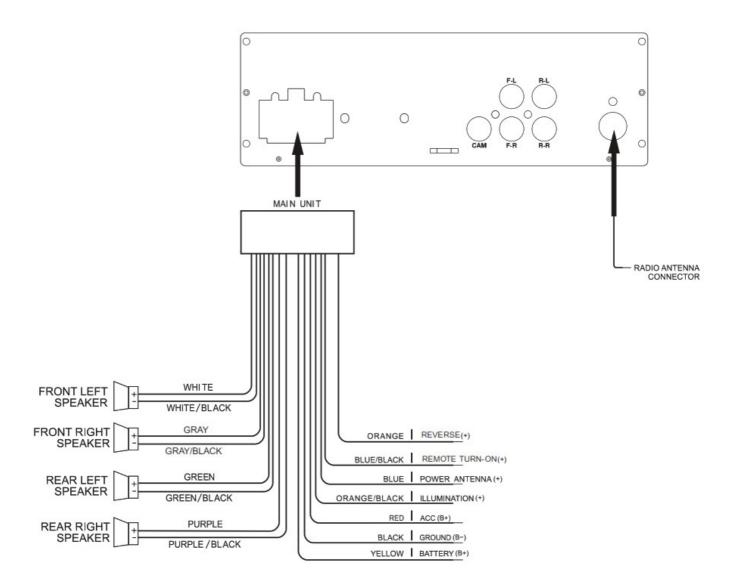

Note:

When replacing a fuse, make sure to use the correct type and amperage. Using an incorrect fuse could cause damage. The unit uses (1) 10 amp ATC mini style fuse located on the power connector.

Wiring Notes:

Subwoofer output

The Subwoofer preamp audio output (black jacket with green RCA) is active in all audio modes.

Rear camera input

A rear view camera (not included) can be used with the Camera input.


Control Locations



- 1. Mode
- 2. Tune/Track Up
- 3. Power/Volume/Mute
- 4. Tune/Track Down
- 5. USB/microSD/AUX Inputs

General Operation

Power On/Off	Momentarily press $oldsymbol{\circ}$ to turn the unit on. Press and hold to turn the unit off.	
Volume	Rotate the volume knob to increase or decrease the volume level.	
Mute	Momentarily press MUTE to silence the audio. Momentarily press MUTE again to r eturn to the previously selected volume. Rotating the volume knob while the volum e is muted will also cancel the mute function.	
Mode	Press MODE to step through all available input modes: Radio, SD Card, USB, Blue tooth Phone, Bluetooth Music, Auxiliary Input, Rear Camera and Settings. Modes o f operation are indicated on the display and/or the monitor. Optional USB device an d SD card must be connected/inserted to appear in the mode selection string.	
Auxiliary Input	Connect external audio/video devices to the 3.5mm auxiliary input on the front pan el.	
USB Input	Insert a USB device to play MP3 files.	
SD Card	Insert an SD card into the SD slot to play MP3 files.	

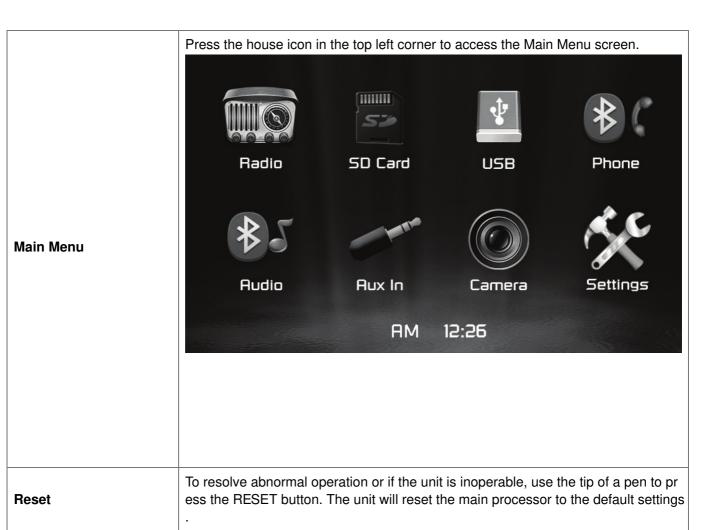

From the Main Menu screen, select Settings to access the Setup menu and select f rom three categories represented by the icons on the left side of the screen: Settin gs, Audio and Bluetooth. AM 12:26 Settings * 110 📓 Time Setting Beep Camera Loudness Radio Area Panel Adjust Setup Menu Settings: • Time Setting – Access and adjust date and time settings. • Beep - Turn the audible beep on or off. • Camera – Turn the rear camera input on or off. • Loudness – Press to turn Loudness feature on or off. • Radio Area - Adjust the following radio options: USA, Asia, Europe or South Am • Calibration – Follow the prompts to calibrate the touch screen. • Version – View current version numbers for the unit. • **Restore default** – Press to restore unit to factory settings. Audio: • Sound Effect - Adjust EQ, Treble/Bass or Balance/Fader settings. Bluetooth: • Auto Connect – Turn Auto Connect feature on or off. • Auto Answer - Turn Auto Answer feature on or off. The touch screen controls on the bottom of each screen allow direct access to imp **Touch Screen Controls** ortant features during any mode of operation. Dimmer 1 Press to dim the display. Audio 2 Press to adjust audio options such as EQ, Treble/Bass or Balance/Fader.

Press to access the settings menu.

AM/FM Tuner Operation

Settings 3



Radio Operation	Select the Radio icon from the Main Menu screen.	
Main Menu 1	Press to return to Main Menu screen.	
Current Mode Indicator 2	Displays current mode of operation.	
Tune Frequency Down 3	Press and hold << to seek a lower frequency. Press << momentarily to tune the unit down one step at a time.	
Band 4	Press between 2 AM and 3 FM bands.	
Local / Distance 5	Press to toggle between Local and Distance tuning.	
Tune Frequency Up 6	Press and hold >> to seek a higher frequency. Press >> momentarily to tune the unit up one step at a time.	
Stereo 7	Press to toggle between Stereo and Mono tuning.	
Preset Stations 8	Press and hold to set the current station in that preset spot. Press momentarily to recall the desired preset and begin playback.	
AS/PS 9	Press to scan presets and listen to the first 10 seconds of each. Press again to s top scanning and listen to the station. Press and hold to automatically find and st ore the strongest stations as presets.	

USB/SD Card Operation



USB/SD Operation	To play audio files from a USB device or SD card, insert device and playback will begin automatically. To return to USB or SD card playback from another mode of operation, select the corresponding icon from the Main Menu. • USB Playback – Insert a USB device into the USB slot on the side of the unit. • SD Card Playback – Insert SD card into the SD slot on the top of the unit. When inserting an SD card, the label should face up.	
Main Menu 1	Press to return to Main Menu screen.	
Current Mode Indicator 2	Displays current mode of operation.	
Repeat 3	Press to select a repeat option: Repeat 1, Repeat Folder or Repeat Off.	
Random 4	Press to enable or disable random playback.	
Previous File / Track 5	Press to go back to the previous file or track.	
Play / Pause 6	Press to pause or resume playback.	
Next File / Track 7	Press to advance to the next file or track.	
Folder Down 8	Press to advance to the next folder.	
Folder Up 9	Press to go back to the previous folder.	
Direct Search 10	Press to directly enter file number to begin playback of that file.	

Media Compatibility - USB/SD Card

File Type			МР3
File System	FAT -	FAT 12	X
		FAT 16/FAT 32	1
File Extension	.mp3/.MP3/.mP3		1
The Extension	.rm	.rmp/.m4a	
	MPEG 1		1
MPEG Format	MPEG 2		1
	MPEG 2.5		1
	MPEG 1		32/44.1/48kHz
Sampling Frequency	MPEG 2		12/16/22 05/24kHz
	MPEG 2.5		8/11.025/12kHz
	MPEG 1		32 – 320kbps
Bitrate	MPEG 2		8 – 160kbps
	MPEG 2.5		8 – 160kbps
	Directory Depth		Unlimited
	File Name Length		32 bytes
Other Information	Total File Number		2000 files
	Total Folder Number		200 folders
	File Number via Folder		2000 files
		ver.l.x	1
	MP3 ID3 TAG	ver.2.x	1
		Title. Artist. Album	1

Notes:

• Due to ongoing technological advancement, some USB flash drives and/or SD cards may be incompatible with this unit.

Media Compatibility

Media Compatibility	The following types of files are not compatible: • MP3 PRO format, MP3 playlists • RMP format • WAV format • WMV format • AAC, protected AAC, M4A format
Playback Order	MP3 playback sequence begins in the root folder of the USB flash drive or SD card. Any empty folders or folders that do not include MP3 files are skipped.
Compatible Recording Formats	ISO9660 standards: • Maximum nested folder depth is 8 (including the root folder). • Valid characters for folder/file names are letters A-Z (all caps), numbers 0-9, and " _" (underscore). Some characters may not be displayed correctly, depending on the character type.
Notes	Some files may not play or be displayed correctly, depending on sampling rates and bit rates. For best results, use the following settings when ripping MP3 files: 128kbp s or higher constant bit rate 44.1kHz or higher sampling frequency

Bluetooth Operation



Preparation	Before you can use a Bluetooth device, it must be paired and connected. Make sure that Bluetooth is activated on your device before you begin the pairing process.	
Pairing a New Device	The unit broadcasts the pairing signal constantly when no devices are currently con nected. Complete the pairing sequence from your Bluetooth device. Refer to the ow ner's manual for your device for more details. The device name is "XVM296BT". The Bluetooth passcode is "0000". The unit can be in any mode of operation hen pa iring is performed. On certain phones, pairing may need to be done more than once.	
Connecting a Paired D evice	Most Bluetooth devices support the auto-connect feature and will connect automatic ally if the device is in range when the unit is powered-on. If your device was previously paired but does not connect, enter the Bluetooth setup menu and turn Au to Connect on.	
Bluetooth Phone	To access the phone, select Bluetooth Phone from the Main Menu or press the phone icon from any operational mode.	
Main Menu 1	Press to return to the Main Menu screen.	
Phone Keypad 2	Use the phone keypad to dial the desired phone number. Alternately, numbers can be dialed directly from the phone.	
Current Mode Indicator 3	Displays current mode of operation.	
Bluetooth Phone 4	Press to access Bluetooth phone.	
Bluetooth Music 5	Press to access Bluetooth music.	
Available Devices 6	Press to view a list of available devices.	
Talk 7	Press to connect a call.	
End Call 8	Press to end a call.	





Dimmer 9	Press to dim the display.
Audio 10	Press to adjust Audio options.
Settings 11	Press to access the Settings menu.
Bluetooth Phone 12	Press to access Bluetooth Phone (from Music mode).
Bluetooth Music 13	Press to access Bluetooth Music (from Phone mode).
Previous File / Track 14	Press to go back to the previous file or track.
Play / Pause 15	Press to pause or resume playback.
Next File/Track 16	Press to advance to the next file or track.

Front 3.5mm Aux Input

Auxiliary Input	Connect an optional audio source into the 3.5mm (front panel) input. Select auxiliary input from the Main Menu to listen to audio. Adjust volume on the external audio source as needed (if connected to the headpho ne output of the device).
-----------------	--

Rear Camera Operation – (Optional)

Using Rear Camera	Connect an optional rear camera to the Camera Input (Black RCA connector). Refer to the wiring diagram for details. Manual selection – Touch CAMERA icon from the Main Menu or from any operational mode (when enabled) to select camera mode. Touch the top left are a on the screen to exit camera mode. Note: The manual mode is for dedicated cameras that are ALWAYS on while driving , it is not meant for cameras that are connected to the vehicle's reverse light.
Auto Selection	The unit will automatically select camera mode when connected to the reverse lamp circuitry. Note: The external video output is not active when using the rear camera input.

Specifications

FM Tuner	Tuning range: 87.5MHz-107.9MHz Usable sensitivity: 10dBf 50dB quieting sensitivity: 20dBf Stereo separation @ 1kHz: 38dB Frequency response: 30Hz-13kHz
AM Tuner	Tuning range: 530kHz-1710kHz Usable sensitivity: 24uV Frequency response: 30Hz-2.3kHz
Front USB	Compatibility: High Speed USB 2.0 USB Class: Mass storage class
SD	Compatibility: Micro SD memory card & Micro SDHC memory card
Monitor	Panel size: 6.2" diagonal measurement View angle (up/down/left/right): 50/70/70/70 Resolution: 800 (H) x 480 (V) Brightness (cd/m2): 250 Contrast ratio: 500:1 Pixels: 1,152,000
General	Speaker output impedance: 4 ohms Line output voltage: 2 volt RMS Line output impedance: 200 ohms Chassis dimensions: 7" x 7" x 4" (W x D x H) Design and specifications subject to change without notice.



CEA-2006 Power Standard Specifications (reference: 14.4VDC +/- 0.2V, 20Hz~20kHz)
Power Output: 16 Watts RMS x 4 channels at 4 ohms and < 1% THD+N Signal to Noise Ratio: 80dBA (reference: 1 watt into 4 ohms)

Limited One Year Warranty

This warranty gives you specific legal rights. You may also have other rights which vary from state to state. Dual Electronics Corp. warrants this product to the original purchaser to be free from defects in material and

workmanship for a period of one year from the date of the original purchase.

Dual Electronics Corp. agrees, at our option, during the warranty period, to repair any defect in material or workmanship or to furnish an equal new, renewed or comparable product (whichever is deemed necessary) in exchange without charges, subject to verification of the defect or malfunction and proof of the date of purchase. Subsequent replacement products are warranted for the balance of the original warranty period.

This warranty is extended to the original retail purchaser for products purchased from an authorized Dual dealer and used in the U.S.A.

What is covered?

This warranty covers all defects in material and workmanship in this product. The following are not covered: software, installation/ removal costs, damage resulting from accident, misuse, abuse, neglect, product modification, improper installation, incorrect line voltage, unauthorized repair or failure to follow instructions supplied with the product, or damage occurring during return shipment of the product. Specific license conditions and copyright notices for the software can be found via www.dualav.com.

What to do?

- 1. Before you call for service, check the troubleshooting guide in your owner's manual. A slight adjustment of any custom controls may save you a service call.
- 2. If you require service during the warranty period, you must carefully pack the product (preferably in the original package) and ship it by prepaid transportation with a copy of the original receipt from the retailer to an authorized service center.
- 3. Please describe your problem in writing and include your name, a return UPS shipping address (P.O. Box not acceptable), and a daytime phone number with your shipment.
- 4. For more information and for the location of the nearest authorized service center please contact us by one of the following methods:
- Call us toll-free at 1-866-382-5476
- E-mail us at cs@dualav.com

Exclusion of Certain Damages: This warranty is exclusive and in lieu of any and all other warranties, expressed or implied, including without limitation the implied warranties of merchantability and fitness for a particular purpose and any obligation, liability, right, claim or remedy in contract or tort, whether or not arising from the company's negligence, actual or imputed. No person or representative is authorized to assume for the company any other liability in connection with the sale of this product. In no event shall the company be liable for indirect, incidental or consequential damages.

Troubleshooting

General

Problem	Cause	Action
Unit will not turn on (no power)	Yellow wire not connected or incorrec t voltage Red wire not connected or in correct voltage	Check connections for proper voltage (11-16V DC)
	Black wire not connected	Check connection to ground
	Fuse blown	Replace fuse(s)
	Speaker wires not connected	Check connections at speakers
Unit has power (but no sound)	One or more speaker wires touching each other or touching chassis groun d	Insulate all bare speaker wires from each othe r and chassis ground
Unit blows fuse(s)	Yellow or red wire touching chassis ground	Check for pinched wire
	Speaker wires touching chassis ground	Check for pinched wire
	Incorrect fuse rating	Use fuses with correct rating
Unit has audio (but no video)	Parking brake safety circuit not conne cted Parking brake not applied	Check connections at parking brake Apply parking brake as described on page 26
No video display (when in reverse)	Reverse circuit not connected Vehicle is not in reverse	Check connections at reverse lamp Select reverse gear
IR remote does not wo rk	Dead battery	Replace battery

For Your Records	Please keep your original sales receipt and be prepared to provide this receipt in the event you require service, as your original receipt is considered the best proof of pur chase and indicates the date you purchased your Dual product. Dealer Name:
Register Your Product	Register your product online at www.dualav.com.

Notes



Dual Electronics Corp. Toll Free: 1-866-382-5476 Monday-Friday, 9AM-5PM EST

www.dualav.com

©2019 Dual Electronics Corp. All rights reserved.

NSA0119-V1

Printed in China

Documents / Resources



<u>Dual XVM296BT Multimedia Receiver with Bluetooth Featuring a 6.2" Touch Screen Display</u> [pdf] Owner's Manual

Multimedia Receiver with Bluetooth Featuring a 6.2 Touch Screen Display, XVM296BT

References

• Dual Electronics - Home Page

Manuals+, home privacy