



Home » DUALTRON » DUALTRON EY4 Smart Display Plus Support Instruction Manual

### Contents [ hide ]

- 1 DUALTRON EY4 Smart Display Plus Support
- 2 Diagram And Functions
- 3 Specifications
- 4 Packing List
- 5 Assembly
- 6 Bluetooth Connection
- 7 How to Ride
- 8 Folding
- 9 Frequently Asked Questions
- 10 Documents / Resources
  - 10.1 References



**DUALTRON EY4 Smart Display Plus Support** 




Scan the QR code to download the latest user materials and obtain the latest updates and safety instructions.



The pictures shown are for illustration purposes only. Actual product may vary.

# **Diagram And Functions**

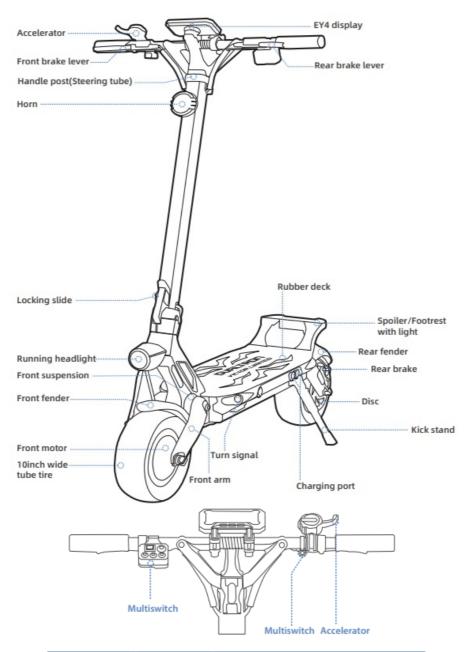

Name	Function	Operation method
√ ○ ▷ Turn Signal Button	Turn on/off the left/right signal	Press the left/right side of the Turn Signal Button, the left/right turn signal will keep blinking.
Headlight Button	Turn on/off the headlight	Press the Headlight Button, the headlight is on;Press it again,the headlight is off.
Horn Button	Turn on the horn	Press the Horn Button, the scooter will beep once.
Ambient Light Button	Turn on/off ambient light	Press the Ambient Light Button, turn on/off both sides of ambient light.
Warning Light Button	Turn on the warning light	Press the Warning Light Button,the left&right signals will keep blinking until press the Warning Light Button again.
Motor system selection button	Enable SINGLE/DUAL drive mode	Switch modes through pressing the button.
Accelerator	Speed up	Pull the throttle to accelerate.


### **Specifications**

	Item	Parameter
Product	Model	Dualtron Victor limited
Battery	Battery Capacity	60V28Ah CN / 60V35Ah Samsung
	Range	90km / 110km
	Charging Ambient Temperature	0 to 40°C (Battery temperature exceeds 55°C,BMS start protection program.)
	Battery Management System	Over-heating, short circuit, over-current, over-discharge and over-charge protection
	Max. load	120kg
Rider	Recommended Age	16-60 years old
	Required Height	3'11" -6'6" (120-200 cm)
Display	Туре	EY4 LCD Bluetooth Display(Ability to connect to DUALTRON APP)
Motor	Motor Type	BLDC Hub Motor
1-10101	Nominal Power	1300w*2
	Net Weight	39.1kg
	Max. Slope	Around 70% (35°)
	Drive System	Single/ Dual drive
	Speed	25km/h
	Length × Width × Height	1190x600x1300mm
Machine	Folded: Length × Width × Height	1190x260x560mm
rideiiiie	Wheelbase	Approx.970mm
	Ground Clearance	Approx.140mm
	Traversable Terrain	Asphalt/flat pavement; obstacles < 5 cm; gaps < 5 cm
	Operating Temperature	-5 to 45°C
	Storage Temperature	-20 to 50°C
	Machine Brake	Nutt Hydraulic Brake
Brake	Electric Brake	ABS&EBS (Indicating the battery temperature exceeds 55°C,BMS start protection program,ABS/EBS fails.)
	Input Voltage	100-120V/200-240V~
Charger	Max. Output Voltage	66.4V 1.7A
Tire	Туре	10x3.0-6.5 tubeless tire
	Tire Pressure	50 psi
	Material	Rubber
Sucnensies	Type	F&R suspension cartridge (replaceable)
Suspension	Optional	(Default) Softest Medium soft Medium Medium hard Hardest

• Disclaimer: this is not a legal opinion or legal advice. The information provided herein (including in the App) is for your convenience and information purposes only. It is not intended to cover every piece of law and/or regulation that may be applicable to this product. DUALTRON explicitly hereby disclaims any and all warranty and/or representation, express or implied, related to completeness, accuracy, or up-to-date of such information. DUALTRON reserves the right but not the obligation to correct, implement and/or update the information. You shall use the information at your own risk. It is your sole responsibility to learn and understand any and all law and/or regulations, requirements, prohibitions, restrictions and/or limitations imposed by either law, government authority, court, private party or others that may apply to your use of this product.


- Theoretical Range: tested while riding with a full battery, 75 kg load, 25°C, at the speed of 25 km/h on average on pavement.
- Typical Range: tested while riding with a full battery, 75 kg load, 25°C, at the speed of 50 km/h on average on pavement. (Some of the factors that affect range include speed, number of starts and stops, ambient temperature, etc.)
- Max.Speed: tested while riding with a full battery,75kg load,25°C, straight road on flat road with no wind. (Some environmental factors can affect max speed, uneven roads, crooked roads, temperature, wind, etc.)

### **Packing List**

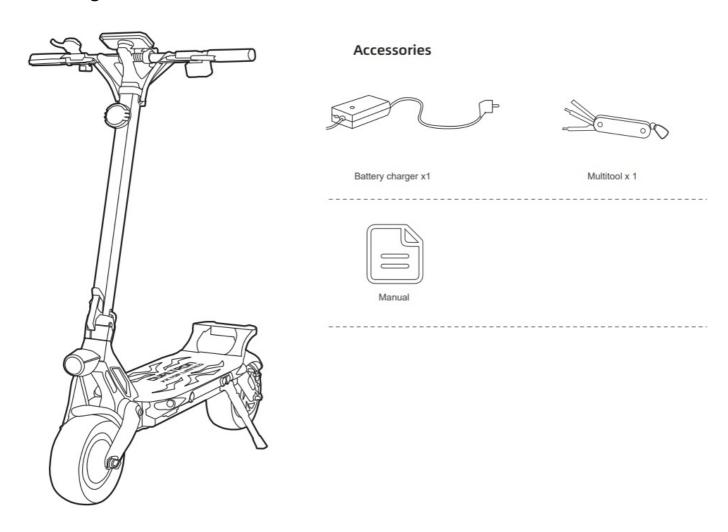


# **Assembly**

- Raise the steering tube and make sure the folding latch gets into the button correctly. (Carefully,if the folding latch gets into the button incorrectly,the steering tube will fall down and be damaged)
- 2. Press down the quick release lever firmly to make sure the folding mechanism is tightened.

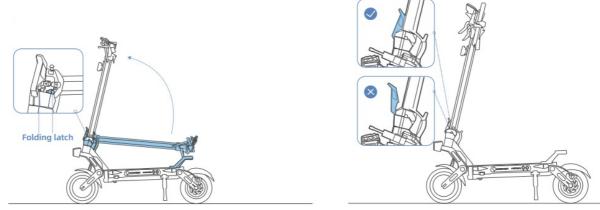


- 3. Check the status of the safety button and make sure it is back to position.
- 4. Lift the handles, slide the hoops, and fix the handles firmly by quick releases.

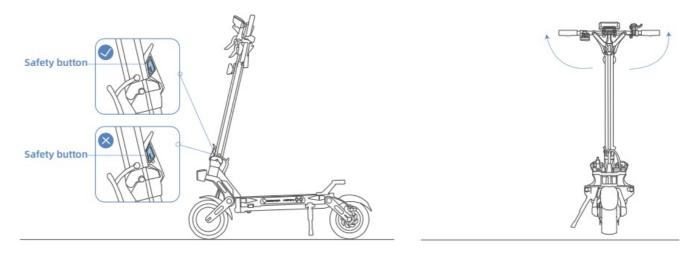

# **Bluetooth Connection**

### **APP Download Guide**

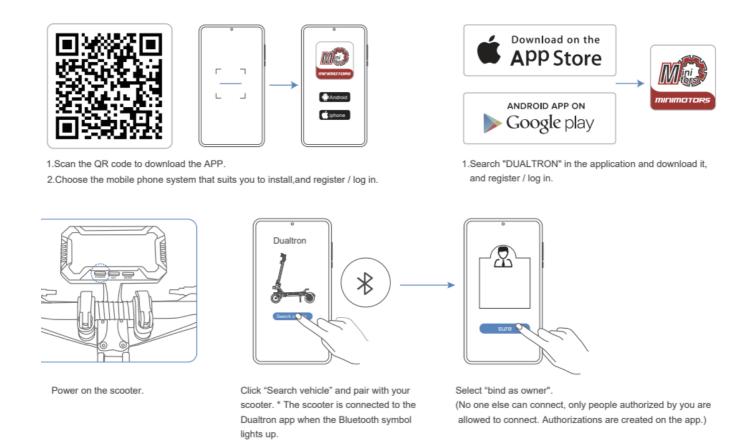


#### How to Ride

- 1. Power on the scooter and choose the speed mode. \* Please choose the speed mode before riding! Note: Speed mode can be choose via the Dualtron app.
- 2. Stand on the footboard with one foot and push off with the other foot to start gliding.
  \*Make sure you have disabled SAFE mode.(SAFE mode setting via Dualtron app.Deactivate safe mode by squeezing brake lever.)
- 3. Put both feet on the footboard and stand stably. Pull the throttle to speed up.




- 4. Slow down by releasing the throttle and squeezing the brake levers.
- To turn, shift your body and turn the handlebars slightly.
   Please watch out for road conditions, sufficient turning space is required.
- 6. When hard braking, serious danger or injury may occur. Maintain a moderate speed and look out for potential hazards.

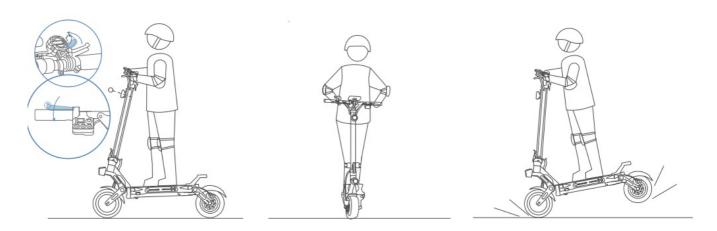


## **Folding**

- Fold the handlebars, slide the folding handle lock out of position to release handles.
- Slide the safety button up and open the quick release lever.

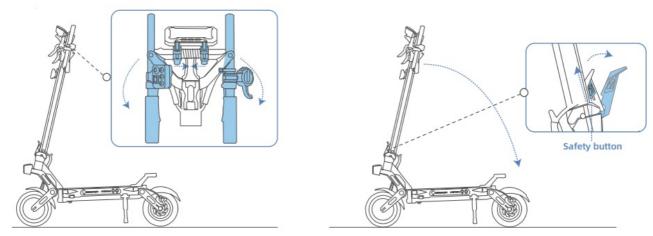

- Press the both folding latches, and then fold the steering tube.
   When pressing the safety latch, you must hlod the steering tube with your hand to prevent falling down and hitting.)
- Lock the handlebar hook to the footrest.
   Ensure that lock the handlebar when lift scooter)

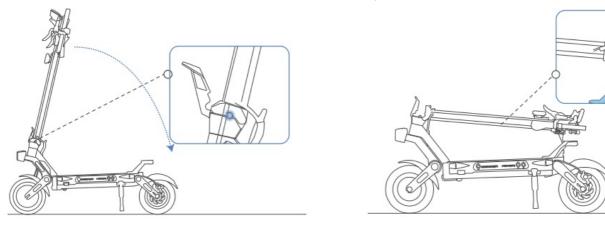

**Frequently Asked Questions** 

• Q: Can I replace the battery on my own?

A: It is recommended to have the battery replaced by a professional service provider to ensure safety and proper installation.

• Q: How often should I check the tire pressure?

A: It is advisable to check the tire pressure before each ride to maintain optimal performance and safety.

# **Documents / Resources**



DUALTRON EY4 Smart Display Plus Support [pdf] Instruction Manual EY4, BLDC Hub Motor, EY4 Smart Display Plus Support, EY4, Smart Dis play Plus Support, Display Plus Support, Plus Support

#### References

- User Manual
- DUALTRON
- BLDC Hub Motor, Display Plus Support, DUALTRON, EY4, EY4 Smart Display Plus Support, Plus Support, Smart Display Plus Support

Leave a comment						
Your email address will not be published. Required fields are marked*						
Comment *						
Name						

Email			

Website		

 $\hfill \square$  Save my name, email, and website in this browser for the next time I comment.

**Post Comment** 

#### Search:

e.g. whirlpool wrf535swhz

Search

Manuals+ | Upload | Deep Search | Privacy Policy | @manuals.plus | YouTube

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.