




E-flite Beechcraft D18 Manual Addendum Instructions

[Home](#) » [E-flite](#) » E-flite Beechcraft D18 Manual Addendum Instructions 



Beechcraft D18 Manual
Addendum Instructions


Contents

[1 Beechcraft D18 Manual
Addendum](#)

[2 Documents / Resources](#)

[2.1 References](#)

Beechcraft D18 Manual Addendum

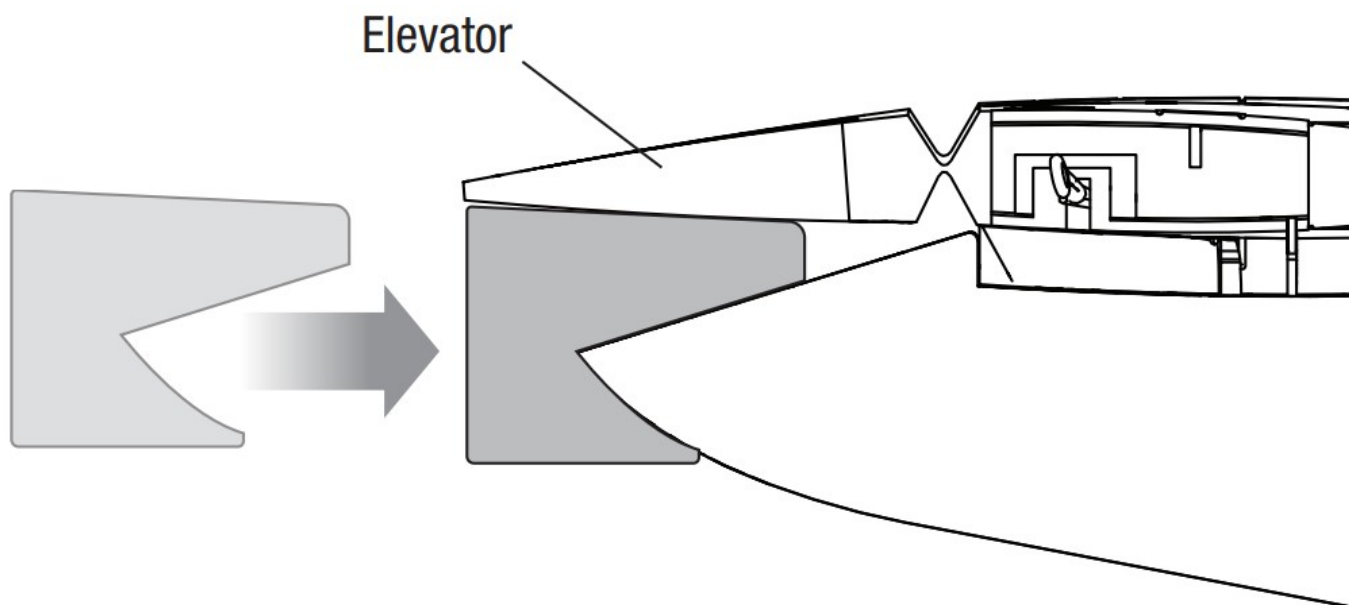

Elevator Control Surface Centering Update

For level flight, with the recommended battery, the elevator will be deflected down a small amount. Use the included gauge to set the neutral position.

Make sure that SAFE is turned OFF and AS3X is not active, before performing the following test.

To verify the neutral position of the elevator, set the gauge in position at the end of the fuselage as shown. Align the top edge of the gauge with the bottom of the elevator. If necessary, adjust the elevator clevis to achieve this position.

HORIZON[®]
H O B B Y


EFL106250, EFL106275

Created 07/22 533600

©2022 Horizon Hobby, LLC.

<http://www.horizonhobby.com/>

Documents / Resources



[E-flite Beechcraft D18 Manual Addendum](#) [pdf] Instructions

EFL106250, EFL106275, Beechcraft D18 Manual Addendum, Beechcraft D18, Manual Addendum

References

- [RC Airplanes and Helicopters, RC Cars and Trucks, RC Boats, RC Radios | Horizon Hobby](#)