

BOOX GO-6

Onyx BOOX Go 6 eReader User Manual

Model: GO-6

INTRODUCTION

This user manual provides comprehensive instructions for the Onyx BOOX Go 6 eReader. It covers essential information regarding setup, operation, maintenance, and troubleshooting to help you maximize your device's capabilities. The Onyx BOOX Go 6 is a compact 6-inch eReader designed for an optimal reading experience with its E Ink Carta 1300 display and Android 11 operating system.



Figure 1: Front view of the Onyx BOOX Go 6 eReader displaying the home screen with time and calendar.

1. SETUP

1.1 Initial Charge

Before first use, fully charge your Onyx BOOX Go 6. Connect the included USB-C cable to the device's USB-C port and the other end to a compatible USB power adapter (not included) or a computer's USB port. The charging indicator will show the charging status.

1.2 Power On/Off

- **To Power On:** Press and hold the power button (usually located on the side or top edge) for a few seconds until the BOOX logo appears.
- **To Power Off:** Press and hold the power button until the power-off menu appears, then select "Power Off".
- **To Sleep/Wake:** Briefly press the power button to put the device into sleep mode or wake it up.

1.3 Initial Configuration

Upon first power-on, you will be guided through the initial setup process:

1. Select your preferred language.
2. Connect to a Wi-Fi network. This is essential for downloading content, updates, and accessing online services.
3. Agree to the terms and conditions.
4. (Optional) Log in to your Google account to access the Google Play Store and other Google services.

2. OPERATING INSTRUCTIONS

2.1 Navigation

The Onyx BOOX Go 6 features a responsive touchscreen for navigation. Use standard touch gestures:

- **Tap:** Select an item or open an application.
- **Swipe:** Scroll through pages or lists.
- **Pinch-to-Zoom:** Adjust text size or zoom in on images (where supported).



Figure 2: The eReader's home screen showing a grid of installed applications, highlighting its Android OS capabilities.

2.2 Reading Books

To open and read a book:

1. From the home screen, tap on "Library" or open a reading application like "NeoReader" (pre-installed) or a third-party app.
2. Select the book you wish to read.
3. **Page Turning:** Tap the left or right side of the screen, or swipe horizontally to turn pages.
4. **Adjusting Text:** Within a book, tap the center of the screen to bring up the reading menu. Here you can adjust font size, font style, line spacing, and margins.
5. **Front Light:** Access the quick settings panel (usually by swiping down from the top of the screen) to adjust the brightness and color temperature (warm/cold) of the front light.



Figure 3: A user holding the Onyx BOOX Go 6, illustrating its comfortable size for reading.



Figure 4: Detailed view of the eReader in hand, emphasizing the clarity of the E Ink display.

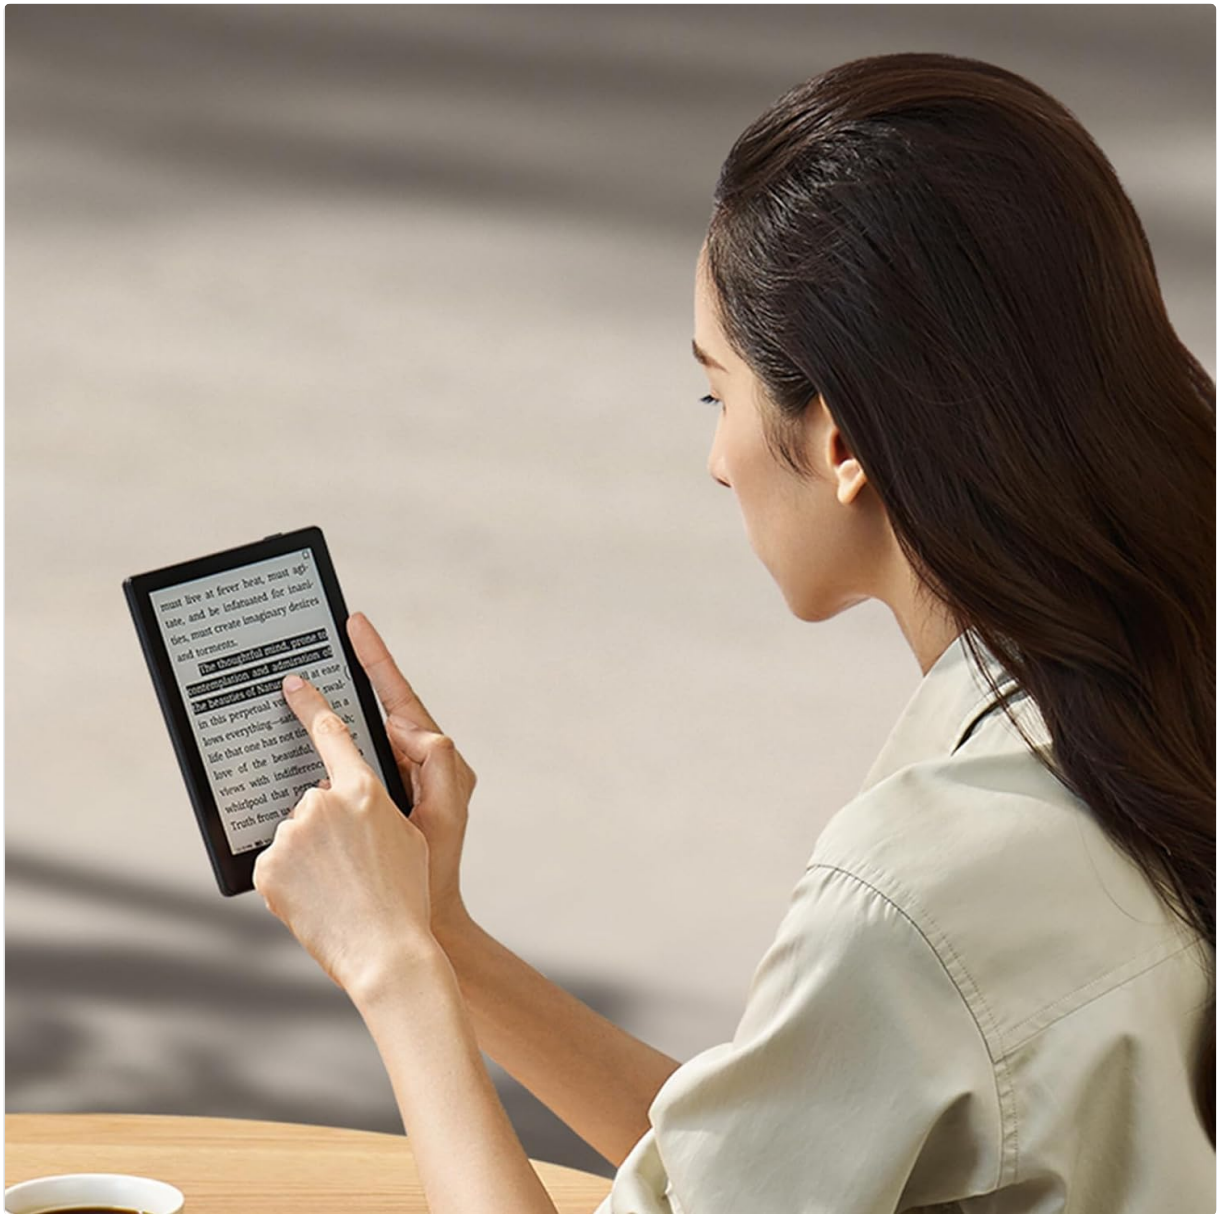


Figure 5: A user engaged in reading on the Onyx BOOX Go 6, highlighting its portability and ease of use.

2.3 App Installation

As an Android-based device, the BOOX Go 6 allows installation of various Android applications. You can download apps from the pre-installed BOOX App Store or, if you've logged into your Google account, from the Google Play Store.

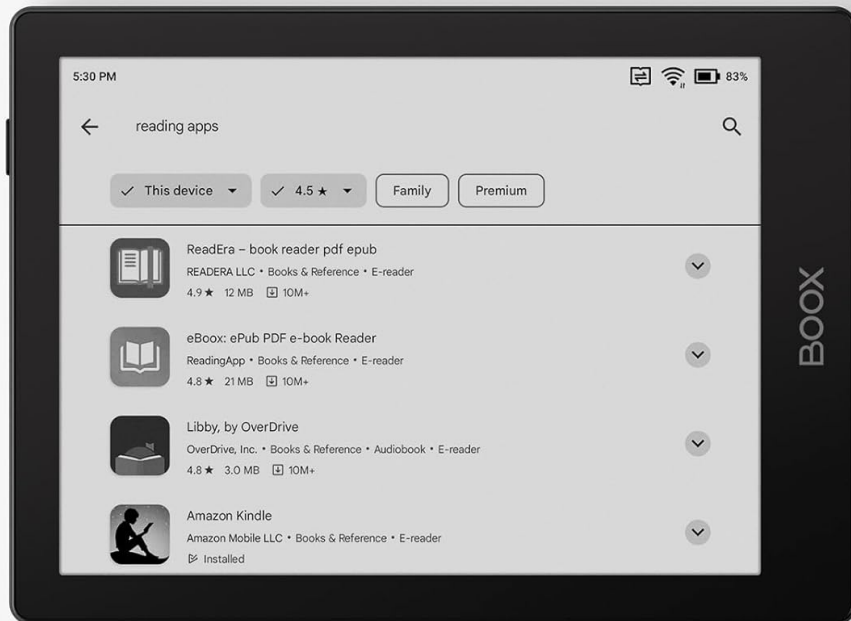


Figure 6: The eReader's screen displaying a selection of reading applications available for download, showcasing app compatibility.

2.4 File Transfer

You can transfer files to your device via:

- **USB-C:** Connect the device to your computer using the USB-C cable. The device will appear as a removable storage drive.
- **Wi-Fi Transfer:** Use the built-in "Send2Boox" feature or other cloud services to wirelessly transfer documents.
- **MicroSD Card:** Insert a microSD card into the dedicated slot for expanded storage.

2.5 Connectivity

- **Wi-Fi:** Enable Wi-Fi in settings to connect to wireless networks for internet access, content downloads, and software updates. Supports 2.4/5GHz.
- **Bluetooth:** Enable Bluetooth in settings to connect wireless headphones or other Bluetooth accessories for audiobooks or other media.

3. MAINTENANCE

3.1 Cleaning the Device

Use a soft, lint-free cloth to gently wipe the screen and body of the device. Do not use liquid cleaners or abrasive materials, as they may damage the screen or finish.

3.2 Battery Care

To prolong battery life:

- Avoid extreme temperatures.
- Do not let the battery fully discharge frequently.
- If storing the device for a long period, charge it to about 50% before storage.

3.3 Software Updates

Regularly check for and install software updates to ensure optimal performance and access to new features. Go to *Settings > Firmware Update* to check for available updates.

4. TROUBLESHOOTING

4.1 Device Not Turning On

Ensure the device is sufficiently charged. Connect it to a power source and try powering it on after a few minutes. If the issue persists, try holding the power button for 10-15 seconds for a forced restart.

4.2 Slow Response or Freezing

If the device becomes unresponsive or slow, try closing background applications. If the issue continues, perform a soft reset by holding the power button until the power-off menu appears and select "Restart".

4.3 Wi-Fi Connectivity Issues

Check if Wi-Fi is enabled in settings. Ensure you are within range of a strong Wi-Fi signal. Try restarting your Wi-Fi router or forgetting and re-connecting to the network on your device.

4.4 Apps Crashing or Not Installing

Ensure you have sufficient storage space. Clear the cache of the problematic app or the app store. If an app continues to crash, try uninstalling and reinstalling it. For persistent issues, a factory reset (see below) might be necessary, but this will erase all data.

4.5 Factory Reset

A factory reset will erase all data and settings on your device, restoring it to its original state. This should be considered a last resort for persistent software issues. Navigate to *Settings > System > Reset options > Erase all data (factory reset)*. Back up any important data before proceeding.

5. SPECIFICATIONS

Feature	Specification
Model Name	Go 6
Display	6-inch E Ink Carta 1300

Display Resolution	1072x1448
Processor	2.0GHz Octa-core CPU
RAM	2GB
Storage	32GB
Operating System	Android 11
Connectivity	Wi-Fi (2.4/5GHz), Bluetooth 5.0, USB-C
Battery	1500mAh (approx. 2 weeks battery life)
Dimensions	5.83 x 0.27 x 4.25 inches
Weight	5.1 ounces
Included Components	Page Tablet

6. WARRANTY AND SUPPORT

For warranty information and technical support, please refer to the official BOOX website or contact their customer service. Keep your purchase receipt as proof of purchase for warranty claims.
For further assistance, visit: www.boox.com

Related Documents - GO-6

	Declaration of Conformity for ONYX BOOX E-readers - Technical Regulations Compliance Official Declaration of Conformity for ONYX BOOX e-readers, confirming compliance with EAEU Technical Regulations TR CU 020/2011 (Electromagnetic Compatibility) and TR EAEU 037/2016 (Restriction of Hazardous Substances). Details applicant (MK-CENTER LLC), manufacturer (ONYX INTERNATIONAL INC.), production sites, product models, and applicable standards.
---	--


Page BOOK UserManual 	BOOX Page E-reader User Manual: Features, Setup, and Usage Comprehensive user manual for the BOOX Page e-reader. Covers setup, NeoReader, apps, settings, and device specifications from Guangzhou Onyx International Inc.
 BOOX Leaf Mighty E-ink Tablet User Manual	BOOX Leaf Mighty E-ink Tablet User Manual User manual for the BOOX Leaf Mighty E-ink Tablet, covering standard accessories, safety guidelines, product views, main interface, library, reader, store, storage, apps, settings, specifications, and declaration.
 BOOX NoteAir Mighty E-ink Tablet User Manual	BOOX NoteAir Mighty E-ink Tablet User Manual User manual for the BOOX NoteAir Mighty E-ink Tablet, covering standard accessories, safety guidelines, product views, main interface, library, reader, store, notes, storage, apps, settings, and specifications.
Palma BOOX UserManual 	Palma BOOX User Manual - Your Guide to the E-Reader Comprehensive user manual for the Palma BOOX e-reader. Learn about its features, safety guidelines, quick start, system settings, and ONYX apps.
	BOOX Blue Wireless Page Turner Pedal Quick Start Guide This guide provides essential information for setting up and using the BOOX Blue wireless page turner pedal, including product details, button functions, pairing instructions, and warranty information.



[ONYX BOOX GO 6 User Manual](#)

A concise guide to the ONYX BOOX GO 6 e-reader, covering setup, operation, features, and specifications. Learn how to turn on/off, charge, connect to a PC, use the dictionary, and understand operating precautions.

lang:en **score:29** filesize: 1.53 M page_count: 13 document date: 2024-09-02

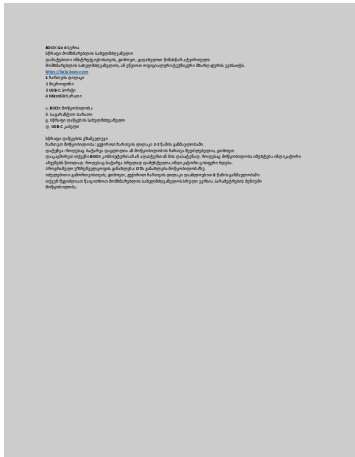

[\[pdf\] User Manual](#)

admin BOOX Go 6 სერია Zoommer სწრაფი დანყების გამკველვეი ჩართეთ მოწყობილობა

გეჭირთ ჩართვის ღილაკი 2 3 წამის განმავლობაში დატენვა როდესაც ბატარეა დაცლილია ან მოწყობილობის ჩართვა boox go s3 zoommer ge site manual |||

BOOX Go 6 , , , . <https://help.boox.com> 1 2 3 USB-C 4 MicroSD . BOOX . . . USB-C : 2-3 . : , BOOX . . , : OTA . , , 8 . . .

lang:en **score:29** filesize: 59.52 K page_count: 1 document date: 2024-10-24

GO 6


Uživatelský manuál



[GO 6 Uživatelský manuál - Návod na použití](#)

Kompletný uživatelský manuál pre zariadenie GO 6 od BOOX. Získajte podrobné informácie o produkte, bezpečnostné pokyny, rýchly štart, systémové funkcie, ako je knižnica, NeoReader, obchod, úložisko, aplikácie a nastavenia.

lang:hr **score:26** filesize: 1.71 M page_count: 95 document date: 2024-09-23

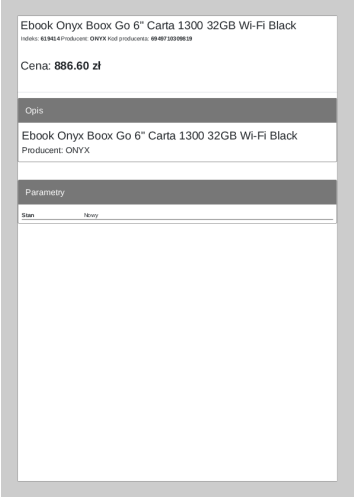

[pdf]

Ebook Onyx Boox Go 6 Carta 1300 32GB Wi Fi Black Sklep internetowy stylem pl ebook onyx boox go carta 32gb wi fi black 619414 upload files product |||

Ebook Onyx Boox Go 6 Carta 1300 32GB Wi-Fi Black Indeks: 619414 Producent: ONYX Kod producenta: 6949710309819 Cena: 886.60 zł Opis Ebook Onyx Boox Go 6 Carta 1300 32GB Wi-Fi Black Producent: ONYX Parametry Stan Nowy ...
lang:hr score:23 filesize: 15.84 K page_count: 1 document date: 2025-01-20




[pdf] User Manual

David Olšok GO 6 2 GB LPDDR4X Stauraum 32 Größe Bildschirme Zoll Unterscheidun g 1072x1448
Berühren Kapazitive Berührung Scheinwerfer Zweifarbiges Frontlicht DE dwn alza cz manual 142623 |||

GO 6 Benutzerhandbuch Inhalt 1. Urheberrechtserklärung
..... 3 2. Produktdetails
..... 4 3. Sicherheitshinweise
..... 6 4. Schnellstart

lang:de score:22 filesize: 1.74 M page_count: 135 document date: 2024-12-06

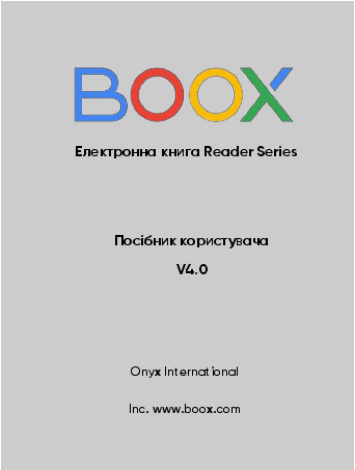

[pdf]

ONYX INTERNATIONAL INC Инструкция Электронная книга BOOX Go 6 Смотреть купить цена и характеристики на WO UA 2nsrqk0kvv40ynvumb4a8idqm65ed47r wo ua upload iblock 26c |||
5 FD ==4 = 74 Reader Series EV5= D EFG64G4 V4.0 Onyx International Inc.
www.boox.com VEF 1. 5 4D4FVO D 46F DEL V D464 5 2.
5DV6= FF6 7 F5E=V 557 56 3. ,6 4 = EF4DF
.....

lang:da score:20 filesize: 9.78 M page_count: 186 document date: 2025-06-12

[illegible]

Declaration of Conformity for ONYX BOOX E-readers - Technical Regulations Compliance

Official Declaration of Conformity for ONYX BOOX e-readers, confirming compliance with EAEU Technical Regulations TR CU 020/2011 (Electromagnetic Compatibility) and TR EAEU 037/2016 (Restriction of Hazardous Substances). Details applicant (MK-CENTER LLC), manufacturer (ONYX INTERNATIONAL INC.), production sites, product models, and applicable standards.

lang:tl score:13 filesize: 91.37 K page_count: 7 document date: 2024-09-23

ONY INTERNATIONAL INC.	
Add: Room 101, Building A, No. 302 Xue-Bao Road, Suzhou District, Guangzhou City, Guangdong Province, China	
Date: 2024/03/09	
FCC ID: X31-G06	
Dear Sir/Madam,	
We, ONY INTERNATIONAL INC. , hereby declares the following statements for <i>ONY International Communications Commission, FCC</i> intent, circuit, structure and internal of these models) are the same. Only model number is different for these model.	
Product name: E Ink Tablet, ePaper Tablet, Digital Paper; E reader, Paper tablet, e-book reader	
Model no: Go 8, B00K Go 8, B00K Go 8 Plus, B00K Go 8 Pro, B00K Go 8 Lite, B00K Go Catbird, B00K Go Catbird Plus, B00K Go Catbird Pro	
Sincerely,	
	
Name/Title:	Chief Technology Officer
Company:	ONY INTERNATIONAL INC.
Address:	Floor 101, Building A, No. 302 Xue-Bao Road, Huzhou District, Guangzhou City, Guangdong Province, China
Phone:	0086-20-89211892
Fax:	0086-20-89211894
E-Mail:	duanhuang@ony-international.com

[\[pdf\]](#) Decleration of Conformity

Declaration Letter of Model Difference ONYX INTERNATIONAL INC GO6 E Ink Tablet ePaper Digital
Paper reader tablet eBook XR3 XR3GO6 go6

ONYX INTERNATIONAL INC. Add: Room 101, Building 4, No. 202 Shiyu Road,
Nansha District, Guangzhou City, Guangdong Province, China Date: 2024/08/09 FCC
ID: XR3-GO6 Dear Sir/Madam, We, ONYX INTERNATIONAL INC. Hereby declares
the following statement for Federal Communications Commission, PCB board, cir...

lang:tl score:13 filesize: 72.91 K page_count: 1 document date: 2024-08-10

[illegible]

[\[pdf\]](#)

Shenzhen GUOREN Certification Technology Service Co Ltd BOOX Model Go 6 Plus Pro Lite Color
Laboratory Shenzhen boox go s3 zoommer ge site certificate |||

...

lang:tl score:12 filesize: 742.09 K page_count: 0 document date: 0000-00-00

CTA Bao'an

Signature: [Signature]
[Red Seal]
Eric Wang

Address: _____
Applicant's name: _____

[pdf] Specifications Test Report

Test Report 5G WIFI Part1 ONYX INTERNATIONAL INC GO6 E Ink Tablet ePaper Digital Paper reader tablet eBook XR3 XR3GO6 go6

Shenzhen CTA Testing Technology Co., Ltd. Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao an District, Shenzhen, China
FCC PART 15 SUBPART C TEST REPORT FCC PART 15 SUBPART E 15.407

Report Reference No. : FCC ID.

lang:en score:11 filesize: 5.42 M page_count: 31 document date: 2024-08-12

CTA

Signature: [Signature]
[Red Seal]
Eric Wang

Address: Fuhai Street, Bao'an District, Shenzhen, China
Applicant's name: _____

[pdf] Specifications Test Report

Test Report BLE ONYX INTERNATIONAL INC GO6 E Ink Tablet ePaper Digital Paper reader tablet eBook XR3 XR3GO6 go6

Shenzhen CTA Testing Technology Co., Ltd. Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao an District, Shenzhen, China
FCC PART 15 SUBPART C TEST REPORT FCC PART 15.247 Report Reference

No.....: CTA24050900401 FCC ID.....

lang:en score:11 filesize: 2.9 M page_count: 31 document date: 2024-08-10

CTA

Signature: [Signature]
[Red Seal]
Eric Wang

Address: _____
Applicant's name: _____


[pdf] Specifications Test Report

Test Report 2 4G WIFI Part1 ONYX INTERNATIONAL INC GO6 E Ink Tablet ePaper Digital Paper reader tablet eBook XR3 XR3GO6 go6

Shenzhen CTA Testing Technology Co., Ltd. Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao an District, Shenzhen, China
FCC PART 15 SUBPART C TEST REPORT FCC PART 15.247 Report Reference

No. : FCC ID.

lang:en score:11 filesize: 5.03 M page_count: 28 document date: 2024-08-12

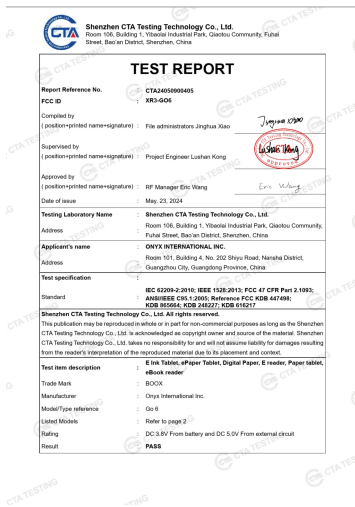

lang:en score:10 filesize: 21.6 M page count: 245 document date: 2016-07-11