

Dpofirs Dpofirsp7kz4st1vw-13

Dpofirs 79 Keys Cordless Bluetooth Keyboard User Manual

Model: Dpofirsp7kz4st1vw-13

1. INTRODUCTION

This manual provides comprehensive instructions for the Dpofirs 79 Keys Cordless Bluetooth Keyboard. Designed for versatility, this compact keyboard offers seamless connectivity across multiple devices and operating systems, enhancing your productivity and typing experience.

Key Features:

- Advanced Bluetooth 5.0 technology for stable connections.
- Connects up to 3 Bluetooth devices simultaneously.
- Compatible with OS X, Windows, iOS, and Android devices.
- Integrated stand for smartphones and tablets.
- Ergonomic design with adjustable feet for comfortable typing.
- Energy-efficient design with long battery life and sleep modes.
- Quiet, responsive keys for a peaceful work environment.

2. PACKAGE CONTENTS

- 1 x Dpofirs 79 Keys Cordless Bluetooth Keyboard
- 1 x User Manual

3. PRODUCT OVERVIEW

The Dpofirs 79 Keys Cordless Bluetooth Keyboard is designed for portability and multi-device use. Its compact layout and integrated stand make it suitable for various environments.



Image: The Dpofirs 79 Keys Cordless Bluetooth Keyboard connected to a tablet and a smartphone, demonstrating its multi-device capability and integrated stand.

The keyboard features a dedicated row of function keys and multimedia controls, accessible via the Fn key. The integrated groove stand provides a stable viewing angle for your devices.

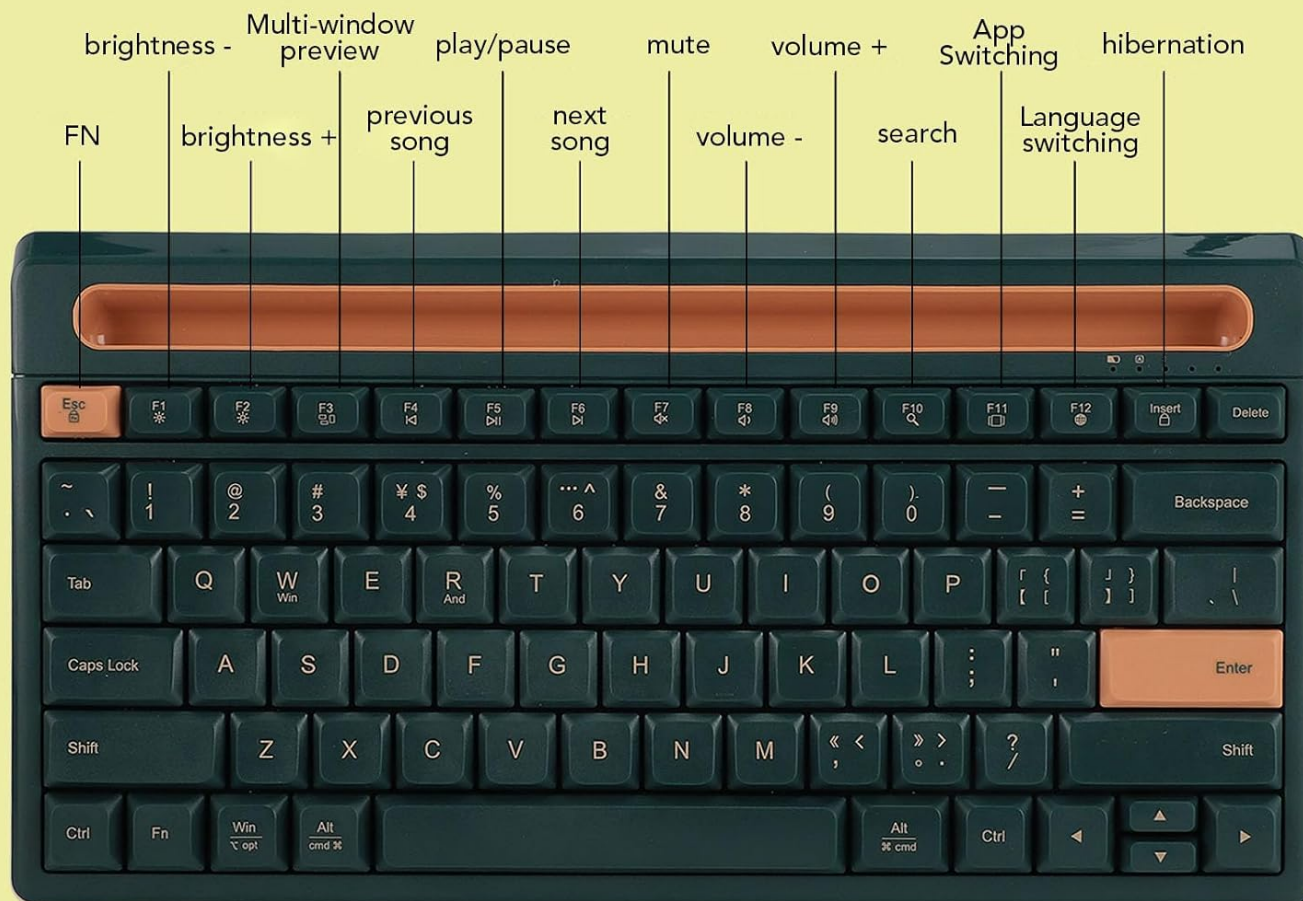


Image: A detailed top-down view of the keyboard, highlighting the layout and the various function key assignments for media control, system switching, and other shortcuts.

The keyboard's ergonomic design includes adjustable feet to reduce wrist strain, ensuring a comfortable typing experience during extended use.



Image: The keyboard from an angled perspective, emphasizing its ergonomic design and the presence of stable feet for improved typing posture.

4. SETUP INSTRUCTIONS

4.1 Battery Installation

The keyboard requires two AAA batteries (not included) for operation.

1. Locate the battery compartment on the underside of the keyboard.
2. Gently slide open the battery compartment cover.
3. Insert two AAA batteries, ensuring correct polarity (+/-).
4. Close the battery compartment cover securely.



Image: A close-up view of the keyboard's underside, showing the open battery compartment where two AAA batteries are to be inserted.

4.2 Powering On/Off

To power on the keyboard, locate the power switch (usually on the side or back) and slide it to the 'ON' position. To power off, slide the switch to 'OFF'.

4.3 Bluetooth Pairing

The keyboard can connect to up to three Bluetooth devices.

1. Ensure the keyboard is powered on and within range of your device.
2. Press and hold the **Fn** key and one of the device keys (**1**, **2**, or **3**) for 3-5 seconds until the corresponding indicator light flashes, indicating pairing mode.
3. On your device (laptop, tablet, smartphone), go to Bluetooth settings and search for available devices.
4. Select "Dpofirs Keyboard" (or similar name) from the list of found devices.
5. Follow any on-screen prompts to complete the pairing process. The indicator light on the keyboard will stop flashing once successfully paired.
6. Repeat these steps for up to two additional devices using **Fn+2** and **Fn+3**.



Image: The keyboard positioned with a tablet and smartphone, illustrating its ability to connect and switch between multiple devices seamlessly.

5. OPERATING INSTRUCTIONS

5.1 Switching Between Paired Devices

To switch between your paired devices, simply press **Fn + 1**, **Fn + 2**, or **Fn + 3**. The keyboard will automatically connect to the selected device.

5.2 System Compatibility Switching

The keyboard supports various operating systems. To optimize key functions for your specific system, use the following combinations:

- **Fn + Q**: For Android devices
- **Fn + W**: For Windows devices
- **Fn + E**: For iOS devices

- **Fn + R:** For OS X devices

5.3 Function Keys and Multimedia Controls

The top row of keys provides quick access to various functions when pressed in combination with the **Fn** key. Refer to the keycap legends for specific functions:

- **Fn + F1/F2:** Brightness adjustment
- **Fn + F3:** Multi-window preview
- **Fn + F4:** Play/Pause media
- **Fn + F5/F6:** Previous/Next track
- **Fn + F7:** Mute audio
- **Fn + F8/F9:** Volume down/up
- **Fn + F10:** Search function
- **Fn + F11:** App switching
- **Fn + F12:** Hibernation
- **Fn + Insert:** Language switching

5.4 Integrated Stand Usage

The keyboard features a built-in groove stand, ideal for holding smartphones and tablets at a comfortable viewing angle. The groove size is approximately 10.6 x 0.6 x 0.55 inches (27 x 1.5 x 1.4 cm).

6. MAINTENANCE

6.1 Battery Replacement

When the keyboard's performance degrades or it fails to connect, it may be time to replace the AAA batteries. Follow the battery installation steps in Section 4.1.

6.2 Cleaning

To clean the keyboard, power it off and gently wipe the surface with a soft, dry, or slightly damp cloth. Avoid using harsh chemicals or abrasive materials. Do not allow moisture to enter the keycaps or internal components.

6.3 Storage

When not in use for extended periods, power off the keyboard and store it in a cool, dry place away from direct sunlight and extreme temperatures. Removing batteries for long-term storage is recommended to prevent leakage.

7. TROUBLESHOOTING

If you encounter issues with your Dpofirs keyboard, please refer to the following common solutions:

- **Keyboard not connecting:**
 - Ensure the keyboard is powered on and batteries are fresh.
 - Verify Bluetooth is enabled on your device.
 - Re-initiate the pairing process (Section 4.3).
 - Check if the keyboard is paired to another device; switch channels using Fn+1/2/3.
 - Restart both the keyboard and your device.
- **Keys not responding:**

- Check battery level and replace if necessary.
- Ensure the keyboard is connected to the correct device channel.
- Verify system compatibility setting (Fn+Q/W/E/R) matches your device.

- **Keyboard enters sleep mode too quickly:**

- The keyboard is designed to enter shallow sleep after 2 minutes and deep sleep after 30 minutes of inactivity to conserve power. Press any key to wake it up. This is normal operation.

- **Connection is unstable:**

- Ensure there are no obstructions between the keyboard and your device.
- Move closer to your device to reduce interference.
- Avoid using the keyboard near other strong wireless signals.

8. SPECIFICATIONS

Feature	Detail
Model Name	Dpofirsp7kz4st1vw-13
Connectivity Technology	Bluetooth 5.0 (also compatible with 3.0)
Number of Keys	79
Working Distance	Approx. 10m / 32.81ft
Multi-Device Support	Up to 3 devices simultaneously
Compatibility	Windows, iOS, OS X, Android
Battery Type	2 x AAA batteries (not included)
Battery Life	3-6 months (depending on usage)
Integrated Stand Groove Size	10.6 x 0.6 x 0.55 inches (27 x 1.5 x 1.4 cm)
Dimensions	11.9 x 6.1 x 1.1 inches (approximate)
Item Weight	1.21 pounds
Manufacturer	Dpofirs

9. WARRANTY INFORMATION

Please refer to the product packaging or the original purchase platform for specific warranty terms and conditions. Dpofirs products typically come with a limited warranty covering manufacturing defects. Keep your proof of purchase for warranty claims.

10. SUPPORT

For further assistance, technical support, or inquiries regarding your Dpofirs 79 Keys Cordless Bluetooth Keyboard, please visit the official Dpofirs store or contact customer service through your purchase channel.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question