

EBTRON
SDX-1000
Smart Display
Panel



EBTRON SDX-1000 Smart Display Panel User Guide

[Home](#) » [EBTRON](#) » EBTRON SDX-1000 Smart Display Panel User Guide 

Contents

- [1 EBTRON SDX-1000 Smart Display Panel](#)
- [2 Specifications](#)
- [3 Product Usage Instructions](#)
- [4 SDX-1000 Wiring Connections](#)
- [5 INSTRUCTIONS TO INSTALLER:](#)
- [6 FAQs](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)
- [8 Related Posts](#)



EBTRON SDX-1000 Smart Display Panel



Specifications

- Product Name: IAQ Enforcer Smart Display Panel SDX-1000
- Connection Type: Ethernet
- Supported Cable: CAT-5e or higher
- Power Input: 12VDC
- Manufacturer: EBTRON, Inc.

Product Usage Instructions

Installation Guide:


1. Use a standard RJ-45 Ethernet connection (T-568A or T-568B) and CAT-5e cable or higher.
2. Connect one end of the Ethernet cable to the SDX-1000 and the other end to a standalone Ethernet network switch. Ensure both ends follow either the T-568A or T-568B standard.
3. Ensure SDX-1000 is connected to a standalone Ethernet network and not exposed to non Ebtron approved devices.
4. Connect power using the provided 12VDC power adapter.

Note: The USB port is used for system and application updates, as well as certain SDX-1000 features.

Contact Information:

- EBTRON, Inc.
- 1663 HWY 701 South, Loris SC 29569
- Phone: 800-2-EBTRON (1-[800-232-8766](tel:8002328766))
- Website: EBTRON.com Email: sales@ebtron.com


SDX-1000 Wiring Connections

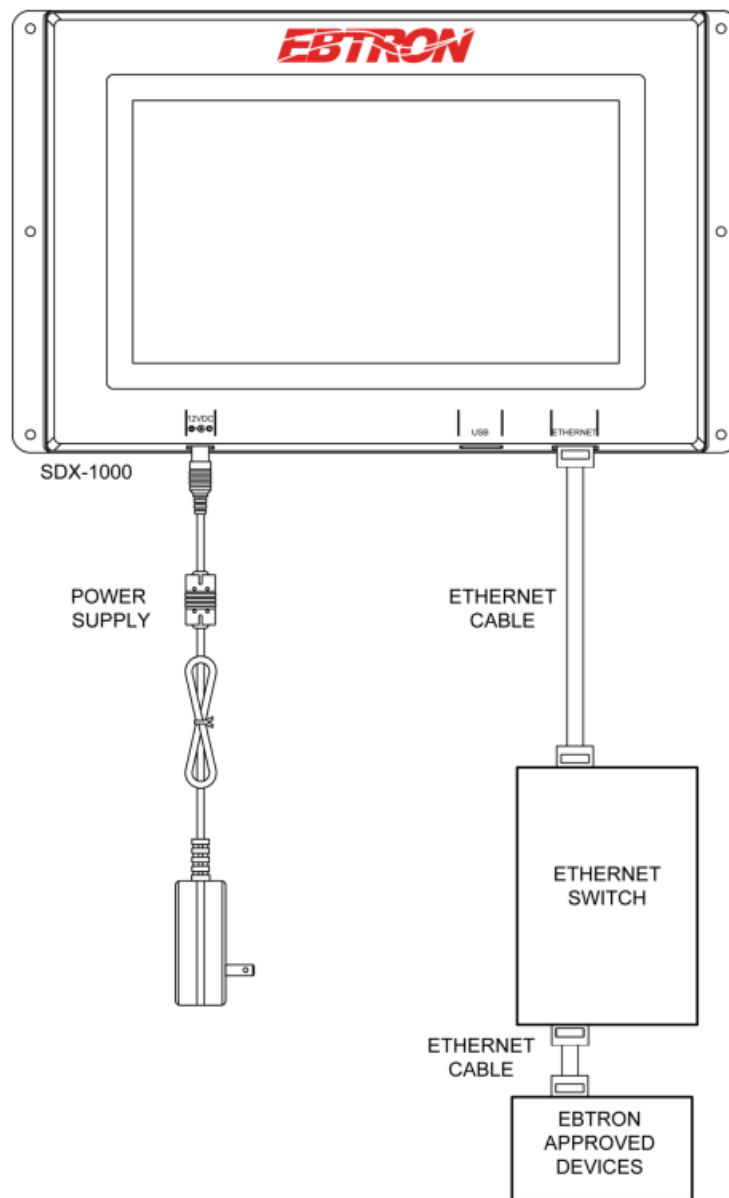

SDX-1000 CONNECTIONS

SDX-1000 CONNECTIONS

Ethernet															
T-568A								T-568B							
1	2	3	4	5	6	7	8	1	2	3	4	5	6	7	8
Green/White	Green	Orange/White	Blue	Blue/White	Orange	Brown/White	Brown	Orange/White	Orange	Green/White	Blue	Blue/White	Green	Brown/White	Brown

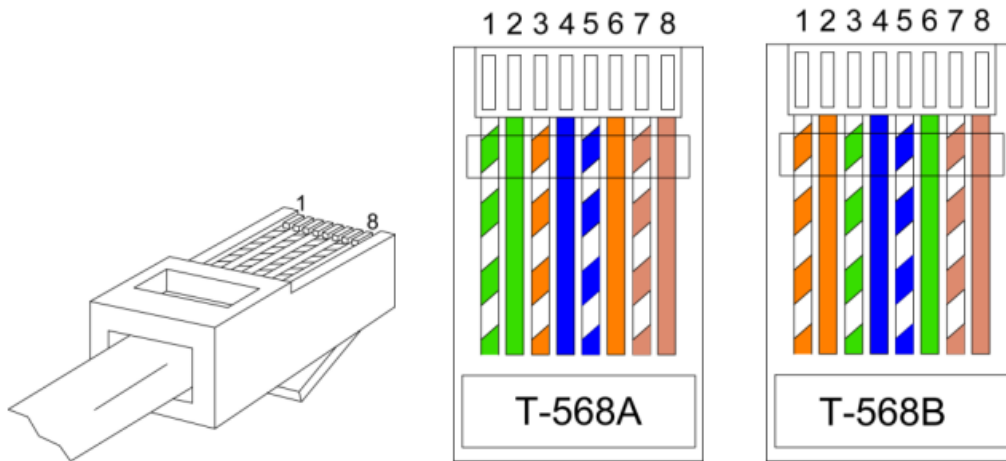

INSTRUCTIONS TO INSTALLER:

1. Use a standard RJ-45 Ethernet connection (T-568A or T-568B) and CAT-5e cable or higher.
 2. Connect the Ethernet cable on one end to the SDX- 1000 and the other end to a standalone Ethernet network switch. Make sure both ends of the cable are manufactured using either the T-568A or T-568B standard as shown above.
 - Both ends of cable must follow the same standard.
 - SDX-1000 must be on an stand alone Ethernet network. Do not install on a network that is exposed to non Ebtron approved devices, including the B.A.S.
 3. Connect power using the provided 12VDC power adapter.
 - USB port is used for system and application updates, and certain SDX-1000 features.
- EBTRON, Inc., 1663 HWY 701 South, Loris SC 29569 800-2-EBTRON (1- [800-232-8766](tel:8002328766))
- [EBTRON.com sales@ebtron.com](mailto:sales@ebtron.com)

FAQs

Q: Can the SDX-1000 be connected to any Ethernet network?

A: No, the SDX-1000 must be connected to a standalone Ethernet network and should not be exposed to non Ebtron approved devices.

Q: What is the purpose of the USB port on the SDX-1000?

A: The USB port is used for system and application updates, as well as certain SDX-1000 features.

Documents / Resources

	<p>EBTRON SDX-1000 Smart Display Panel [pdf] User Guide</p> <p>SDX-1000 Smart Display Panel, SDX-1000, Smart Display Panel, Display Panel, Panel</p>
--	--

References

- [User Manual](#)

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.