

Manuals.plus /

› GOWENIC /

› GOWENIC 5G Wi Fi 6 Mobile Hotspot Instruction Manual

## GOWENIC GOWENICqe42vach5g

# GOWENIC 5G Wi Fi 6 Mobile Hotspot User Manual

Model: GOWENICqe42vach5g

## 1. INTRODUCTION

Thank you for choosing the GOWENIC 5G Wi Fi 6 Mobile Hotspot. This device provides high-speed wireless internet connectivity on the go, supporting multiple devices simultaneously. Please read this manual carefully to ensure proper use and optimal performance of your device.





Image: Front view of the GOWENIC 5G Wi Fi 6 Mobile Hotspot, showing the power button and signal indicators.

## 2. PACKAGE CONTENTS

---

- GOWENIC 5G Wi Fi 6 Mobile Hotspot
- USB Charging Cable
- User Manual (this document)



Image: The GOWENIC 5G Wi Fi 6 Mobile Hotspot shown alongside its included USB charging cable.

### 3. DEVICE LAYOUT

---

- **Power Button:** Used to turn the device on/off.
- **LED Indicators:** Display signal strength, battery status, and network type (5G/4G).
- **SIM Card Slot:** For inserting your Nano-SIM card.
- **USB-C Charging Port:** For charging the device.



Image: Angled view of the GOWENIC 5G Wi Fi 6 Mobile Hotspot, highlighting the LED indicators for signal strength and network status.

## 4. SETUP GUIDE

---

### 4.1. Inserting the SIM Card

1. Ensure the device is powered off.
2. Locate the SIM card slot on the side of the device.
3. Carefully insert a Nano-SIM card into the slot with the gold contacts facing down, until it clicks into place.

### 4.2. Charging the Device

1. Connect the provided USB charging cable to the USB-C port on the device.
2. Connect the other end of the USB cable to a compatible USB power adapter (not included) or a computer's USB port.
3. The battery indicator LED will show charging status. A full charge is recommended before first use.



Image: A close-up view of the GOWENIC 5G Wi Fi 6 Mobile Hotspot, showing the USB-C charging port.

### 4.3. Powering On/Off


- To power on: Press and hold the Power button until the LED indicators light up.
- To power off: Press and hold the Power button until the LED indicators turn off.

## 5. OPERATING INSTRUCTIONS

---

### 5.1. Connecting to the Wi-Fi Hotspot

1. Power on the GOWENIC Mobile Hotspot.
2. On your device (phone, tablet, laptop), open the Wi-Fi settings.
3. Search for available Wi-Fi networks. You will find two network names (SSIDs): one for 2.4GHz and one for 5.8GHz.
4. Select the desired network (e.g., "MIFI-780194-5G" or "MIFI-780194-2.4G").
5. Enter the Wi-Fi Key (password) provided on the back label of the hotspot.
6. Once connected, you can access the internet.

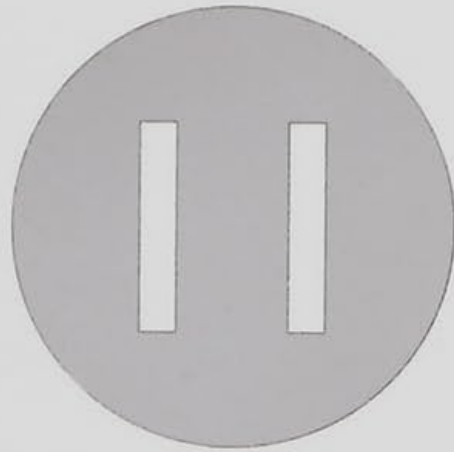

# 5G MiFi

**5.8G SSID: MIFI-780194-5G**

**Wi-Fi Key: 12345678**

**2.4G SSID: MIFI-780194-2.4G**

**Wi-Fi Key: 12345678**

**IMEI : 863780071780194**



Image: Back view of the GOWENIC 5G Wi Fi 6 Mobile Hotspot, displaying the default SSID and Wi-Fi Key for both 2.4GHz and 5.8GHz bands.

## 5.2. Understanding LED Indicators

- **Signal Strength Indicators:** Multiple bars indicate stronger cellular signal.
- **Network Type Indicator (5G/4G):** Lights up to show the current cellular network type.
- **Wi-Fi Indicator:** Shows Wi-Fi activity.
- **Battery Indicator:** Displays remaining battery life or charging status.

## 6. MAINTENANCE AND CARE

---

- **Cleaning:** Use a soft, dry cloth to clean the device. Do not use liquid cleaners or aerosols.
- **Water Resistance:** The device is IP67 water resistant. While it can withstand splashes and brief immersion, avoid prolonged submersion or exposure to high-pressure water. Ensure all ports are dry before charging.
- **Temperature:** Operate the device within recommended temperature ranges. Avoid extreme heat or cold.
- **Storage:** Store the device in a cool, dry place when not in use.
- **Battery Care:** To prolong battery life, avoid fully discharging the battery frequently. Charge the device regularly.

## 7. TROUBLESHOOTING

---

Problem	Possible Solution
Device does not power on.	Ensure the battery is charged. Connect the device to a power source and try again.
No internet connection.	<ul style="list-style-type: none"> <li>• Check if the SIM card is correctly inserted and active.</li> <li>• Verify cellular signal strength via LED indicators.</li> <li>• Restart the hotspot device.</li> <li>• Ensure your connected device is within Wi-Fi range.</li> </ul>
Slow internet speed.	<ul style="list-style-type: none"> <li>• Move to an area with better cellular signal.</li> <li>• Reduce the number of connected devices.</li> <li>• Ensure no background applications are consuming excessive bandwidth.</li> </ul>
Device frequently disconnects or reboots.	<ul style="list-style-type: none"> <li>• Ensure the device is not overheating. Place it in a well-ventilated area.</li> <li>• Check for firmware updates (if applicable, refer to manufacturer's website).</li> <li>• If issues persist, contact customer support.</li> </ul>
Battery drains quickly.	<ul style="list-style-type: none"> <li>• Reduce screen brightness (if applicable).</li> <li>• Limit the number of connected devices.</li> <li>• Ensure the device is not in an area with poor signal, as this can increase power consumption.</li> </ul>

## 8. SPECIFICATIONS

---

Feature	Detail
Model Name	GOWENICqe42vach5g
Connectivity Technology	5G
Wireless Communication Standard	802.11ax (Wi-Fi 6)
Frequency Band Class	Dual-Band (2.4 GHz, 5.8 GHz)
Max Download Speed	Up to 2.77Gbps
Max Upload Speed	Up to 1.25Gbps
Battery Capacity	6100mAh Polymer Battery
Water Resistance	IP67
Supported Devices	Up to 16 connected devices
Dimensions	17 x 10 x 4 cm
Weight	280 g

## 9. WARRANTY AND SUPPORT

---

GOWENIC products are designed for reliability and performance. For warranty information and technical support, please refer to the warranty card included with your product or visit the official GOWENIC website. Keep your purchase receipt as proof of purchase for warranty claims.

For further assistance, you may contact GOWENIC customer service through the contact information provided on their official support channels.