



# ECOFLOW Delta Pro Smart Remote Control User Manual

[Home](#) » [ECOFLOW](#) » ECOFLOW Delta Pro Smart Remote Control User Manual 

## Contents

- [1 ECOFLOW Delta Pro Smart Remote Control](#)
- [2 Specifications](#)
- [3 Product illustration](#)
- [4 Product information](#)
- [5 Wired connection](#)
- [6 How to install](#)
- [7 FCC STATEMENT](#)
- [8 FAQ](#)
- [9 Documents / Resources](#)
  - [9.1 References](#)
- [10 Related Posts](#)

# ECOFLOW


## ECOFLOW Delta Pro Smart Remote Control



## Specifications

- **Product battery type:** AAA (No. 7)
- **USB-C power voltage:** 5.0 V
- **Network port power voltage:** 12 V (DELTA Pro only)


## Product illustration

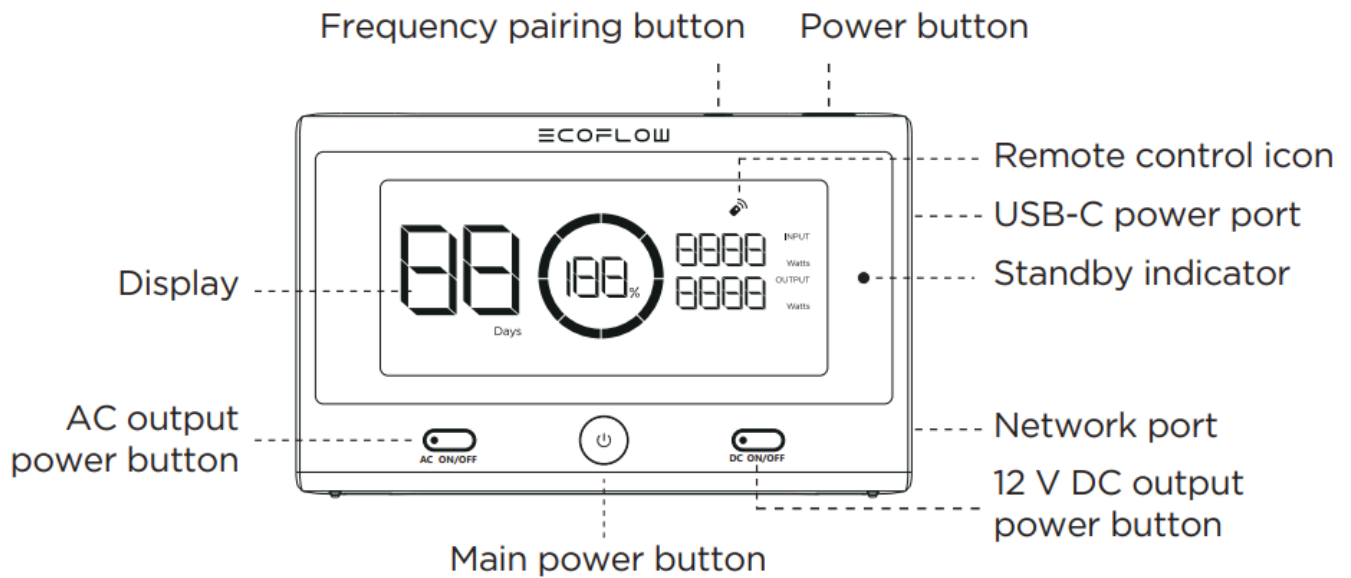

## Product information

- **Model number:** EFD500-RC
- **Battery supply voltage:** 3.0–4.5 V
- **Product battery type:** AAA (No. 7)
- **USB-C power voltage:** 5.0 V
- **Network port power voltage:** 12 V (DELTA Pro only)
- **Operating temperature:** -10°C–45°C

## Wired connection

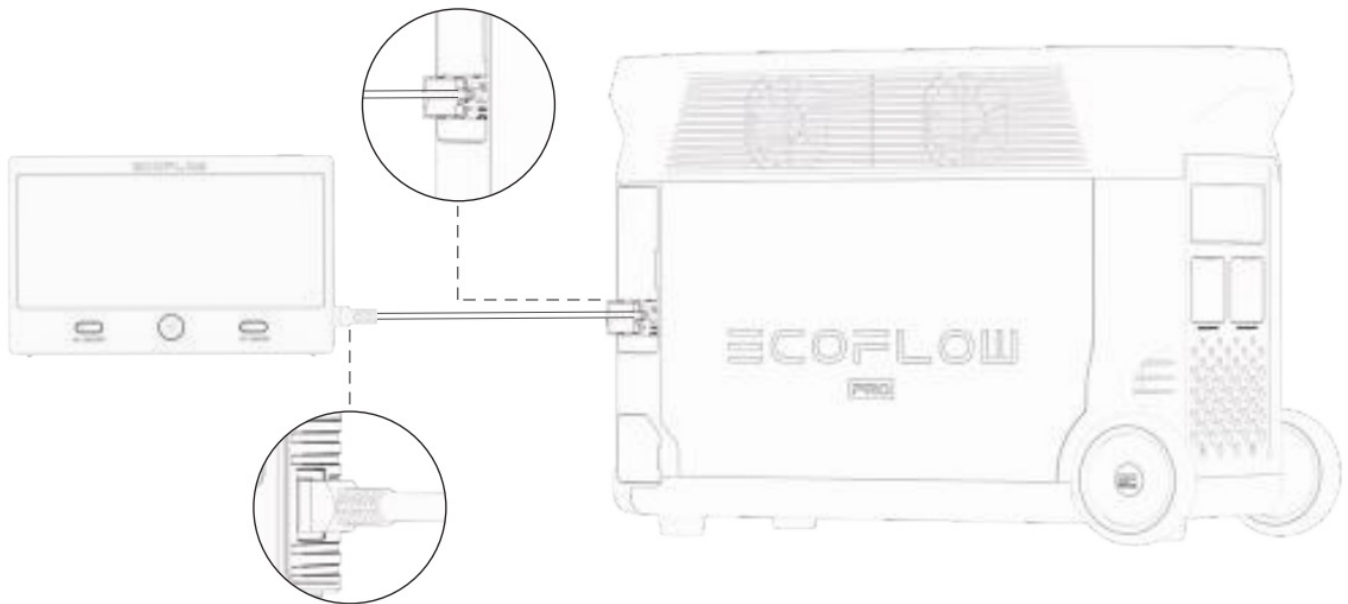


**Special tip:** After connecting successfully, the remote control screen will display the same content as the DELTA Pro screen.

### Connection steps

1. Press the power button to turn on the machine;
2. Press and hold the remote control's frequency pairing button until the remote control icon flashes;
3. Press and hold the DELTA Pro frequency pairing button until the remote control icon flashes.
4. The remote control icon will stay illuminated when the connection is successful.

•

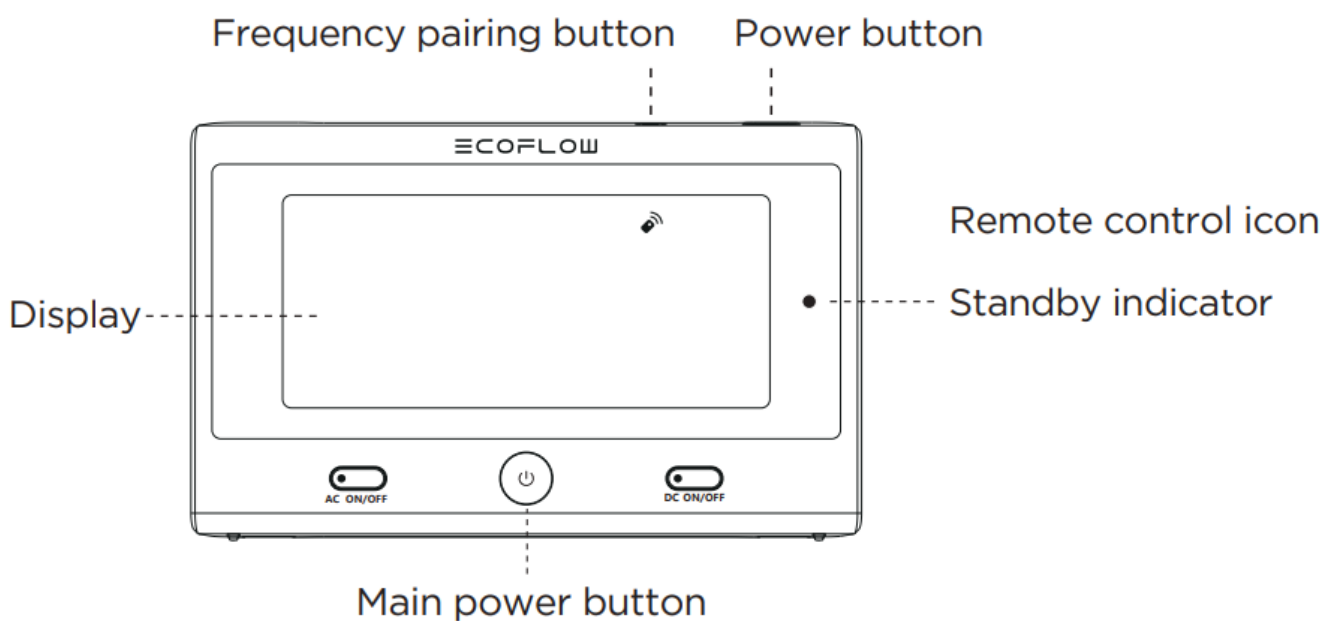


**Power on:** Press the power button

- **Power off:** Press and hold the power button
- **Illuminate LCD screen:** Press the main power button

**Tip:** The Bluetooth standby feature requires a dial test with the

The three statuses of the remote control are shown in the following figure


1. The remote control is not connected;
2. The remote control has connected to the machine successfully;
3. The remote control has connected to the machine successfully and the machine is turned off;

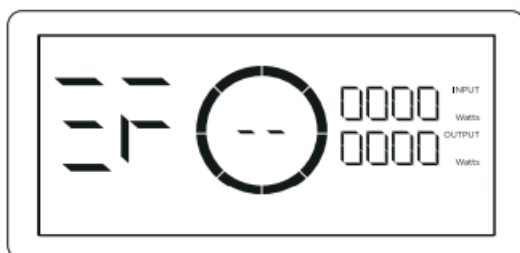

1




2

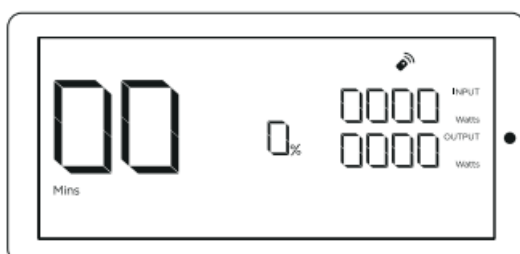

3

## How to install

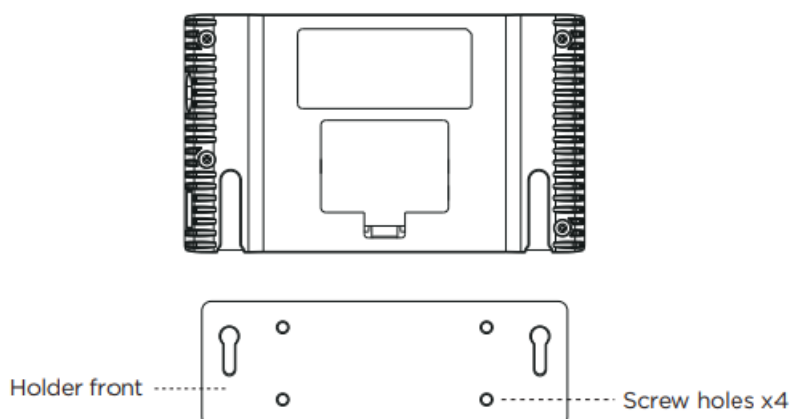

**Method 1:** Screw the holder to the wall, then simply attach the remote control to the holder.

**Tips:** 1. If the wall is made of wood, you can screw it in directly. 2. If the wall is made of concrete, a wall plug is required.



**Method 2:** Use 3M adhesive to affix the holder to the wall, then simply attach the remote control to the holder.

### Special tips

- The remote control enables the DELTA Pro to be powered on remotely;
- The DELTA Pro's Standby Switch needs to be switched to the ON position and the machine must be paired with the remote control before shutting down;

### FCC STATEMENT

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

### Warning:

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

### NOTE:

This equipment has been tested and found to comply with the limits for a Class A digital device, under part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used by the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

### FAQ

#### Frequently Asked Questions (FAQ)

- **Q: What type of battery does the remote control use?**
  - A: The remote control uses AAA (No. 7) batteries.
- **Q: What is the power voltage for the USB-C port?**
  - A: The power voltage for the USB-C port is 5.0 V.
- **Q: Can the remote control be used with DELTA Pro only?**
  - A: Yes, the remote control can be used with DELTA Pro only.
- **Q: How do I connect the remote control wirelessly?**
  - A: Follow these steps:
    - Turn on the machine by pressing the power button.
    - Press and hold the remote control's frequency pairing button until the remote control icon flashes.

- Press and hold the DELTA Pro frequency pairing button until the remote control icon flashes.
- The remote control icon will stay illuminated when the connection is successful.

- **Q: How do I power on/off the DELTA Pro?**


- A: To power on, press the power button. To power off, press and hold the power button.

- **Q: How do I install the holder for the remote control?**

- A: You can choose either Method 1 or Method 2:
  - **Method 1:** Screw the holder to the wall and attach the remote control to it.
  - **Method 2:** Use 3M adhesive to affix the holder to the wall and attach the remote control to it.



## Documents / Resources

	<a href="#">ECOFLOW Delta Pro Smart Remote Control</a> [pdf] User Manual Delta Pro Smart Remote Control, Delta Pro, Smart Remote Control, Remote Control, Control
---	--

## References

- [User Manual](#)