



EcoNet Controls eWeLink WIFI Bulldog Controller Instructions

[Home](#) » [Econet Controls](#) » EcoNet Controls eWeLink WIFI Bulldog Controller Instructions 

EcoNet Controls eWeLink WIFI Bulldog Controller



Contents

- 1 [How do I pair my Wireless Remote to my WiFi Bulldog Controller](#)
- 2 [Documents / Resources](#)
- 3 [Related Posts](#)

How do I pair my Wireless Remote to my WiFi Bulldog Controller

Difficulty: Easy


Purpose: Pair your Wireless Remote to an existing WiFi Bulldog installation

If you add another Wireless Button, or have accidentally deleted your wireless pairing by holding down the 433MHz pairing button, you will need to pair your Remote to the Controller.

You will need your Wireless Remote and the Bulldog Controller.

- Press and release the 433MHz Pairing button. 
- A blue (or red) light will start to blink very quickly near the Valve Open/Close Button (See Image Below) 


- If your unit has a red LED it will be difficult to see when the neighboring red LED is on. If you close your valve it will make seeing the red LED easier.

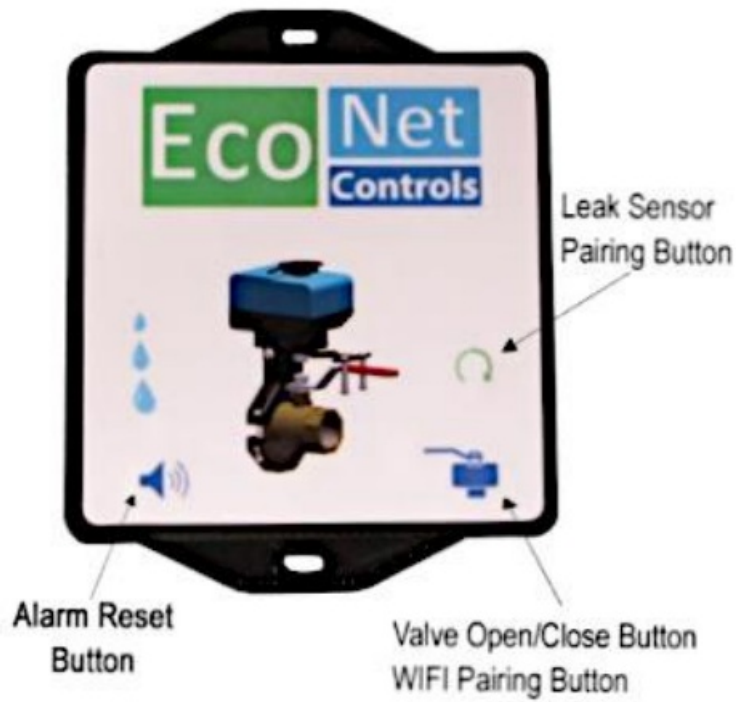

- Press and hold your Wireless Remote button for 1 to 2 seconds.
- Test your remote by using it to close and open the valve.



Documents / Resources

	<p>EcoNet Controls eWeLink WIFI Bulldog Controller [pdf] Instructions eWeLink, eWeLink WIFI Bulldog Controller, WIFI Bulldog Controller, Bulldog Controller</p>
---	---