

EcoNet Controls VC300 Bulldog Controller User Manual

EcoNet Controls VC300 Bulldog Controller



Contents

[1 How do I pair my ELS100 Leak Sensors to my JW Bulldog Controller?](#)

[2 Documents / Resources](#)


How do I pair my ELS100 Leak Sensors to my JW Bulldog Controller?

Difficulty: Easy

Purpose: Add Wireless Leak Sensors to an existing JW Bulldog installation

If you add more Leak Sensors, or have accidentally deleted your Leak Sensor pairing by holding down the 433MHz pairing button, you will need to pair your sensor(s) to the EVC300 Bulldog Controller.


You will need a wet paper towel, your Leak Sensor(s) and the Bulldog Controller.



- Press and release the 433MHz Pairing button. 

- A blue (or red) light will start to blink very quickly near the Valve Open/Close Button (See Image Below)

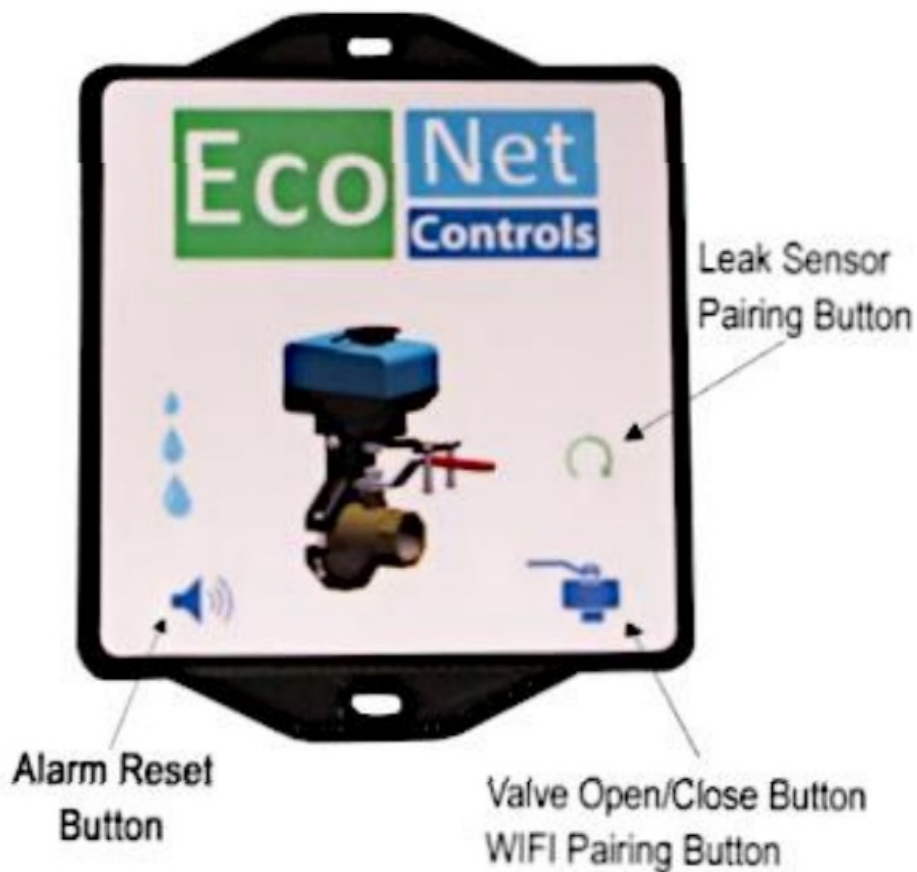

- If your unit has a red LED it will be difficult to see when the neighboring red LED is on. If you close your valve it will make seeing the red LED easier.



- Place your ELS100 Sensor on the wet surface or paper towel. Pairing will be complete after 2-4 beeps on the Sensor when the Controller registers an Alarm and closes the valve.
- Remove the sensor from the wet surface and press the Reset Alarm button to reset the alarm. 
- If needed you can use the Valve Open/Close button to open the valve. 
- Repeat for each sensor you need to pair.



Documents / Resources

	<p>EcoNet Controls VC300 Bulldog Controller [pdf] User Manual</p> <p>ELS100, EVC300, VC300, Bulldog Controller, VC300 Bulldog Controller, Controller</p>
---	---