



ECOWITT WN30 Wireless Multi Channel Thermometer Probe Sensor User Manual

[Home](#) » [ECOWITT](#) » ECOWITT WN30 Wireless Multi Channel Thermometer Probe Sensor User Manual 

Contents

- [1 ECOWITT WN30 Wireless Multi Channel Thermometer Probe Sensor](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 Help](#)
- [5 Introduction](#)
- [6 Get Started](#)
- [7 Overview](#)
- [8 Setup Guide](#)
- [9 Sensor Placement](#)
- [10 Wi-Fi Configuration with gateway](#)
- [11 View Online Data with WS View Plus/ Ecowitt App](#)
- [12 Set Email Alerts](#)
- [13 Specification](#)
- [14 Warranty Information](#)
- [15 Documents / Resources](#)
 - [15.1 References](#)

ecowitt

ECOWITT WN30 Wireless Multi Channel Thermometer Probe Sensor



Product Information

The Wireless Multi-channel Thermometer Probe Sensor (Model: WN30) is a temperature sensor that measures temperature using a 3m (10ft) cabled sensor. It has a long wireless range of up to 300 feet (100 meters) in open areas and transmits readings every 61 seconds. The sensor is IP65 waterproof, ensuring its durability in various conditions.

The data from the sensor can be received by various Ecovitt consoles, including HP2551/HP2553, the WiFi Gateway, WN1900, HP3500/HP3501, WH2910, and can also be posted to <https://www.ecovitt.net>. When paired with the Wi-Fi Gateway, users can view the temperature readings on the Live Data page of the WS View Plus/Ecovitt App, provided that the gateway and the user's phone are connected to the same Wi-Fi network.

The Wireless Multi-channel Thermometer Probe Sensor supports up to 8 channels, and users have the option to edit channel names on the app. The WS View Plus/Ecovitt App also displays battery level information when low battery power is detected.

When paired with a Weather Station Console (HP2551/HP3500/HP3501), users can view water temperature data in real-time on the display. The console allows for up to 8 channels and channel names can be edited on the console (only for HP2551/HP2553 console).

For WH2910 weather station console with console software version V2.1.8 or above, the sensor data cannot be displayed on the console itself but is pushed to <https://www.ecovitt.net> for remote data hosting.

Product Usage Instructions

1. Install the batteries in the Wireless Multi-channel Thermometer Probe Sensor. Refer to section 4.1 of the user manual for detailed instructions.
2. Place the sensor in the desired location. Refer to section 5 of the user manual for guidelines on sensor placement.
3. Pair the sensor with the Wi-Fi Gateway. Follow the instructions provided in section 6.1 of the user manual.
4. Configure the Wi-Fi connection for the gateway. Refer to section 6.2 of the user manual for step-by-step instructions.
5. To view online data, download and install the WS View Plus/Ecovitt App. Follow the steps outlined in section 7

of the user manual.

6. If desired, set up email alerts for temperature readings. Refer to section 8 of the user manual for instructions on configuring email alerts.

Note: For specific warranty information, please refer to section 10 of the user manual.

- Please scan the QR code to read English manual and keep it for future reference



Instruction manuals

<https://www.ecowitt.com/support/download/103>

Help

Our product is continuously changing and improving, particularly online services and associated applications. To download the latest manual and additional help, please contact our technical support team:

support@ecowitt.com

support.eu@ecowitt.net (EU/UK)

Introduction

Thanks for purchasing this WN30 wireless thermometer probe sensor. This device has a 3M/10FT cabled waterproof probe sensor, and can be used to measure temperature in liquids(mainly water) or even bury it in soil or place the sensor into spaces like fridge etc. The sensor works at one of the 8 channels selected via dip switches. It can work by itself by showing current temperature on its own LCD, but also the data is transmitted under ISM bands and the signal can be received by our different consoles or gateways, which streams the sensor data to www.ecowitt.net.

To ensure the best product performance, please read this manual and retain it for future reference.

Get Started

Parts List

One Multi-channel Temperature Probe Sensor One User Manual

Overview

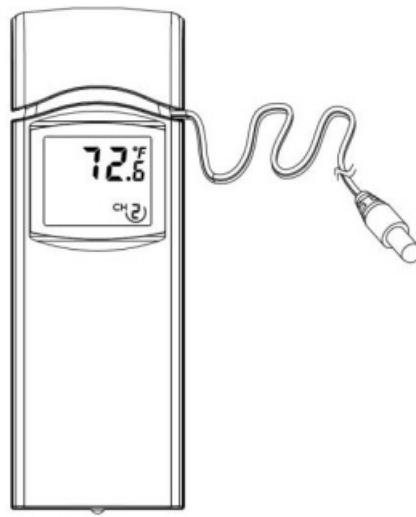


Figure 1: Multi-channel Thermometer Probe
Sensor

Features Temperature Sensor

- Measures temperature with a 3m(10ft) cabled sensor.
- Long wireless range up to 300 feet (100 meters) in open areas
- Transmits readings every 61 seconds
- IP65 waterproof
- Data can be received by our consoles: HP2551/HP2553, the WiFi Gateway, WN1900, HP3500/HP3501, WH2910 and posting data to <https://www.ecowitt.net>.

When paired with a the Wi-Fi Gateway:

- View temperature reading on the Live Data page of the WS View Plus/ Ecowitt App (requires the gateway and your phone are using the same Wi-Fi network)
- Up to 8 channels supported. Channel names can be edited on the app.
- Battery level information displayed on the WS View Plus/ Ecowitt App when low battery power detected

When paired with a Weather Station Console (HP2551/HP3500/HP3501):

- View water temperature data in real-time on the Display
- Up to 8 channels supported. Channel names can be edited on the console(only for HP2551/HP2553 console).

When paired with a weather station console (WH2910 with console software version V2.1.8 or above):

- Sensor data can't be displayed on console but being pushed to <https://www.ecowitt.net> for remote data hosting.

When uploaded to Ecowitt Weather Server:

- View current water temperature data & history records & graph on the website
- Receive email alerts from the server

- Remote monitoring with smart phone, laptop, or computer by visiting the website

Note: The WN30 and WH31 (multi-channel temperature and humidity sensor) will be recognized as the same sensor type by the software. If you purchased both, they will share the eight channels together and the total quantity of the two sensors could not exceed eight.

Setup Guide

Install batteries

1. Remove the battery door on the back of the transmitter(s) by sliding down the battery door, as shown in Figure 2.

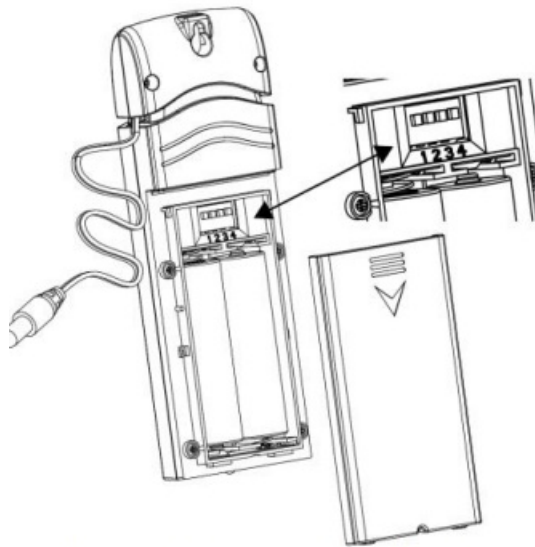


Figure 2: Battery installation

2. Before inserting the batteries, find the dip switches above the battery compartment and set the temperature units and channel number:

Temperature Units: To change the transmitter display units of temperature measure (°F vs. °C), change Dip Switch 4, as referenced in Figure 3.

Channel Number: This device supports up to eight sensors. To set each channel number, change Dip Switches 1, 2 and 3, as referenced in Figure 3.



Switch in down position.



Switch in up position.

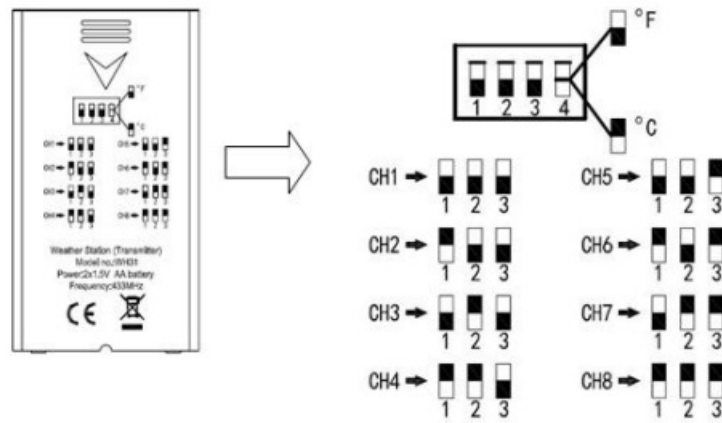


Figure 3: Dip Switch diagram

3. Insert two AA batteries.
 4. Verify the correct channel number (CH) and temperature units of measure (°F vs. °C) are on the display.
 5. Close the battery door.
- Repeat for the additional remote transmitters(sold separately), verifying each remote is on a different channel.

Sensor Placement

To mount or hang the unit on a wall or wood beam:

- Use a screw or nail to affix the remote sensor to the wall, as shown on the left side of figure 4, or
- Hang the remote sensor using a string, as shown in right side of figure 4.

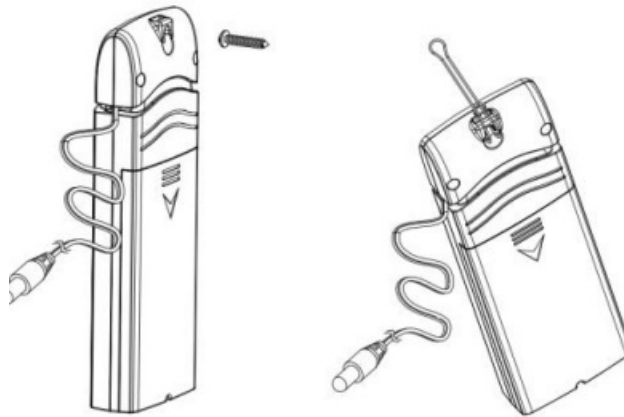


Figure 4: Sensor mounting

Note: Make sure the sensor is mounted vertically and not lying down on a flat surface. This will insure optimum reception. Wireless signals are impacted by distance, interference (other weather stations, wireless phones, wireless routers, TVs and computer monitors), and transmission barriers, such as walls. In general, wireless signals will not penetrate solid metal and earth (down a hill, for example).

Wi-Fi Configuration with gateway

To view the sensor data on your mobile application and receive email alerts on our weather server, you need to pair this device with our the Wi-Fi Gateway or HP2551 /HP3500/HP3501 Weather Station (sold separately).

Pair with Gateway

If the WiFi Gateway has been in operation, and you have never had any WN30 sensor setup before, just power up the sensor and the WiFi Gateway will pick the sensor data automatically.

If you want to use a new WN30 sensor to replace the old one (already configured on certain channel), please try the following:

1. Open the Sensor ID page on the WS View Plus/ Ecowitt App, and find your old sensor ID.
2. Power off the old sensor and power on the new sensor.
3. Click Re-register on the Sensor ID page.

Then the new sensor will be learned and the old sensor will be erased.


Wi-Fi Connection for the Gateway

For this part, please refer to the manual of the Wi-Fi gateway.

Any question, please contact the customer service.

View Online Data with WS View Plus/ Ecowitt App

When the Wi-Fi configuration is done, you may view sensor data as well as the sensor battery voltage information on WS View Plus/Ecowitt App at the live data page.

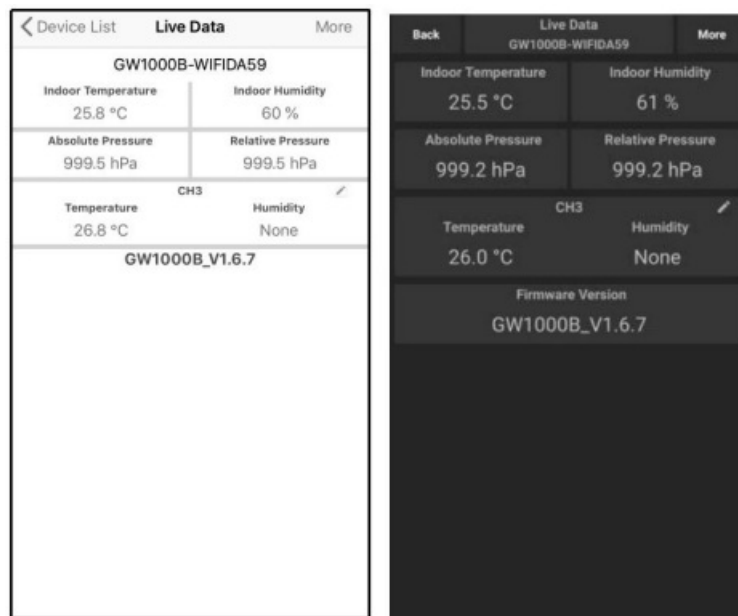

Note: It requires your phone and the gateway using the same network as the APP is talking to the WiFi Gateway directly on the local Wi-Fi network.

To remote monitor the sensor data, please upload the data to our free Ecowitt Weather Server:


<https://www.ecowitt.net>.

Detailed operation instructions can be found on the WiFi Gateway manual.

Any question, please feel free to contact our customer service at support@ecowitt.com

Set Email Alerts

Once your device is added successfully on the Ecowitt Weather server, you may set alerts for the sensor on the website to get email notifications.

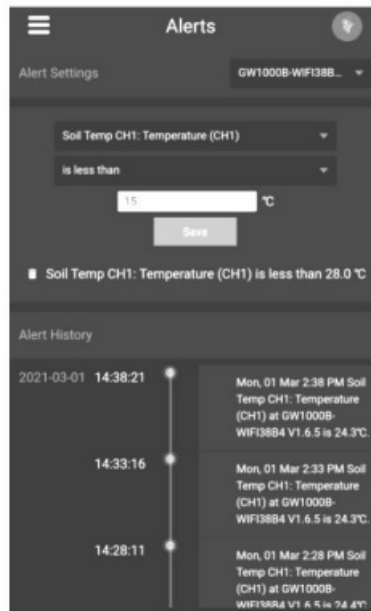

Specification

- **Power:** 2 AA batteries(not included)
- **Sensor Size:** (LxHxW): 4.75 x 1.5 x 0.6 in (123x 42 x 14 mm)
- **Cable Length:** 3M(10FT)
- **Frequency:** 433 / 868 / 915 MHz depending on location (North American: 915 MHz; Europe: 433MHz; Other areas: 433MHz)
- **Temperature range:** -40°C~ 60°C (40°F~ 140°F) Temperature resolution: 0.1°C, or 0.1°F Temperature accuracy: $\pm 1^{\circ}\text{C}$ / $\pm 2^{\circ}\text{F}$ Waterproof Level for the probe: IP65
- **Sensor reporting interval:** 61 seconds

Warranty Information

- We disclaim any responsibility for any technical error or printing error, or the consequences thereof.
- All trademarks and patents are recognized.
- We provide a 1-year limited warranty on this product against manufacturing defects, or defects in materials and workmanship.
- This limited warranty begins on the original date of purchase, is valid only on products purchased, and only to the original purchaser of this product. To receive warranty service, the purchaser must contact us for problem determination and service procedures.
- This limited warranty covers only actual defects within the product itself and does not cover the cost of installation or removal from a fixed installation, normal set-up or adjustments, or claims based on misrepresentation by the seller, or performance variations resulting from installation-related circumstances.

Documents / Resources

<div>Wireless Multi-Channel Thermometer Probe Sensor Model: WN30</div> <div>Contents</div> <div><div>1. Introduction.....iv</div><div>2. Get Started.....v</div><div>2.1 Box List.....v</div><div>3. Overview.....vi</div><div>3.1. Features.....vi</div><div>4. Setup Guide.....vii</div><div>4.1 Installation.....vii</div><div>4.2 Setup the sensor.....viii</div><div>4.3 WN30 Configuration with gateway.....ix</div><div>4.4 WN30 Configuration for the Gateway.....ix</div><div>5. Troubleshooting.....x</div><div>6. The Manual Index.....xi</div><div>7. Specifications.....xi</div><div>8. Warranty Information.....xi</div></div> <div>1</div>	<div>ECOWITT WN30 Wireless Multi Channel Thermometer Probe Sensor [pdf] User Manual</div> <div>WN30 Wireless Multi Channel Thermometer Probe Sensor, WN30, Wireless Multi Channel Thermometer Probe Sensor, Channel Thermometer Probe Sensor, Thermometer Probe Sensor, Probe Sensor, Sensor</div>
---	--

References

-  [Ecowitt Weather](#)
-  [Professional Weather Products | Smart Home Product – Ecowitt](#)
-  [Ecowitt Weather](#)
- [User Manual](#)